TEXAS INSTRUMENTS
REF2025, REF2030, REF2033, REF2041
ZHCSCM7E – JULY 2018 – REVISED FEBRUARY 2022


REF20xx 低漂移、低功率、双路输出、V_{REF} 和 $V_{REF}/2$ 电压基准

1 特性

- 两个输出，V_{REF} 和 $V_{REF}/2$，方便用于单电源系统
- 出色的温漂性能：
  - –40°C 至 125°C 范围内为 8ppm/°C（最大值）
- 高初始精度：±0.05%（最大值）
- V_{REF} 和 V_{BIAS} 跟踪过热：
  - –40°C 至 85°C 范围内为 6ppm/°C（最大值）
  - –40°C 至 125°C 范围内为 7ppm/°C（最大值）
- 微型封装：SOT 23-5
- 低压降：10 mV
- 高输出电流：±20mA
- 低静态电流：360 µA
- 线性调节：3ppm/V
- 负载调节：8ppm/mA
- Matte-Sn 版本 (REF2025AISDDCR) 在 Battelle Class III 和类似严苛环境中的抗腐蚀性得以改进

2 应用

- 电表
- 模拟输入模块
- 模拟输出模块
- 伺服驱动器控制模块
- 断路器（ACB、MCCB、VCB）
- 临床数字温度计
- 实验室和现场仪表
- 电池测试

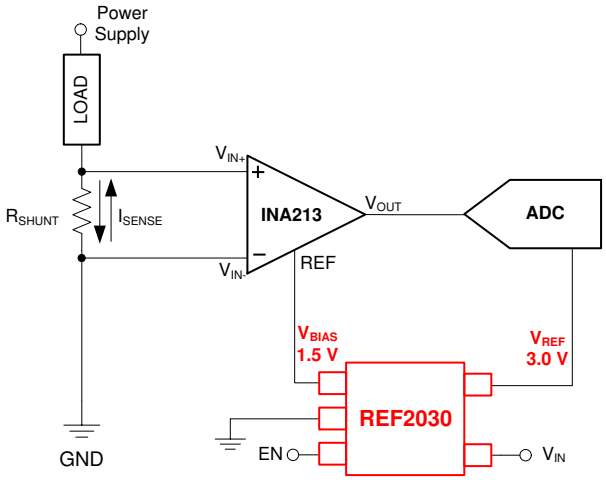

应用示例

3 说明

仅具有正向电源电压的应用通常需要使用一个处于模数转换器 (ADC) 输入范围中间位置的附加稳定电压来偏置输入双极信号。REF20xx 提供了一个可供 ADC 使用的基准电压 (V_{REF}) 和一个可用于偏置输入双极信号的高精度电压 (V_{BIAS})。


REF20xx 在 V_{REF} 和 V_{BIAS} 输出端具有出色的温漂（最大 8ppm/°C）和初始精度 (0.05%)，同时可保持静态工作电流低于 430µA。此外，V_{REF} 和 V_{BIAS} 输出端在 –40°C 至 125°C 的温度范围内相互跟踪，精度为 6ppm/°C（最大值）。与分立式解决方案相比，所有这些特性使得 REF20xx 提升了信号链的精度、节省了布板空间并降低了系统成本。仅 10mV 的超低压降允许器件在极低输入电压条件下工作，这一特性在电池供电系统中非常适用。

V_{REF} 和 V_{BIAS} 电压具有同样出色的技术规范，而且灌电流和拉电流能力同样强大。这些器件具有优异的长期稳定性和低噪声级别，是高精度工业应用的理想选择。

器件信息

器件名称	封装 (1)	封装尺寸（标称值）
REF20xx	SOT-23 (5)	2.90mm × 1.60mm

(1) 如需了解所有可用封装，请参阅数据表末尾的可订购产品附录。

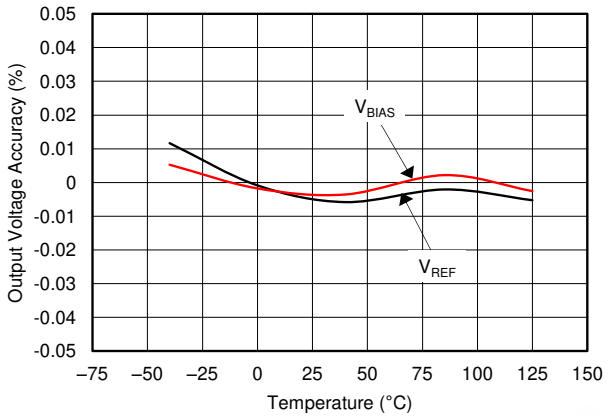

V_{REF} 和 V_{BIAS} 与温度间的关系

本文档旨在为方便起见，提供有关 TI 产品中文版本的信息，以确认产品的概要。有关适用的官方英文版本的最新信息，请访问 www.ti.com，其内容始终优先。TI 不保证翻译的准确性和有效性。在实际设计之前，请务必参考最新版本的英文版本。

Table of Contents

1 特性 ... 1
2 应用 ... 1
3 说明 ... 1
4 Revision History ... 2
5 Device Comparison Table ... 3
6 Pin Configuration and Functions ... 3
Pin Functions ... 3
7 Specifications ... 4
7.1 Absolute Maximum Ratings ... 4
7.2 ESD Ratings ... 4
7.3 Recommended Operating Conditions ... 4
7.4 Thermal Information ... 4
7.5 Electrical Characteristics ... 5
7.6 Typical Characteristics ... 6
8 Parameter Measurement Information ... 13
8.1 Solder Heat Shift ... 13
8.2 Long-Term Stability ... 14
8.3 Thermal Hysteresis ... 15
8.4 Noise Performance ... 16
9 Detailed Description ... 17
9.1 Overview ... 17
9.2 Functional Block Diagram ... 17
9.3 Feature Description ... 17
9.4 Device Functional Modes ... 18
10 Applications and Implementation ... 19
10.1 Application Information ... 19
10.2 Typical Application ... 20
11 Power-Supply Recommendations ... 25
12 Layout ... 26
12.1 Layout Guidelines ... 26
12.2 Layout Example ... 26
13 Device and Documentation Support ... 27
13.1 Documentation Support ... 27
13.2 接收文档更新通知 ... 27
13.3 支持资源 ... 27
13.4 Trademarks ... 27
13.5 Electrostatic Discharge Caution ... 27
13.6 术语表 ... 27
14 Mechanical, Packaging, and Orderable Information ... 27

4 Revision History

注：以前版本的页码可能与当前版本的页码不同

Changes from Revision D (May 2018) to Revision E (January 2022) — **Page**

- 更新了“应用”部分 ... 1
- 更新了整个文档中的表格、图和交叉参考的编号格式 ... 1
- Changed *ESD Rating* table: changed HBM rating from ±4000 V to ±2500 V ... 4
- Updated Long-term stability value ... 5
- Added Long-Term Stability sub-section under Parameter Measurement Information section ... 14

Changes from Revision C (January 2017) to Revision D (May 2018) — **Page**

- Changed application information to include corrosion resistance advantages. ... 19

Changes from Revision B (July 2014) to Revision C (January 2017) — **Page**

- Added I/O column to *Pin Functions* table ... 3
- Added *Storage temperature* parameter to *Absolute Maximum Ratings* table (moved from *ESD Ratings* table) ... 4
- Changed *ESD Rating* table: changed title, updated table format ... 4

Changes from Revision A (June 2014) to Revision B (July 2014) — **Page**

- 将器件状态从“量产数据”更改为“混合状态” ... 1
- 删除了“器件信息”表中的脚注 2 ... 1
- Deleted footnote from Device Comparison Table ... 3
- Added Thermal Information table ... 4

Changes from Revision * (May 2014) to Revision A (June 2014) — **Page**

- 更改了产品预发布数据表 ... 1

Copyright © 2022 Texas Instruments Incorporated

5 Device Comparison Table

PRODUCT	V_{REF}	V_{BIAS}
REF2025	2.5 V	1.25 V
REF2030	3.0 V	1.5 V
REF2033	3.3 V	1.65 V
REF2041	4.096 V	2.048 V

6 Pin Configuration and Functions

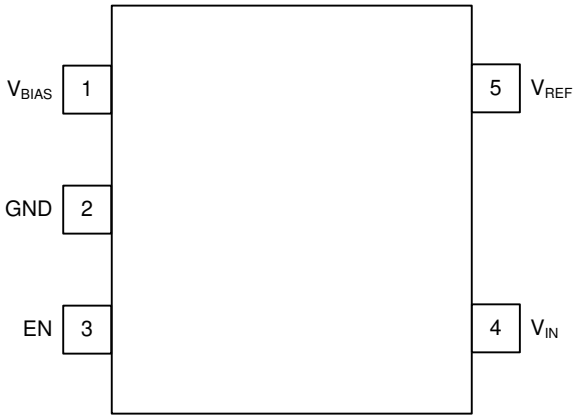


图 6-1. DDC Package SOT23-5 (Top View)

Pin Functions

PIN		I/O	DESCRIPTION
NO.	NAME		
1	V_{BIAS}	Output	Bias voltage output (V_{REF} / 2)
2	GND	—	Ground
3	EN	Input	Enable (EN ≥ V_{IN} – 0.7 V, device enabled)
4	V_{IN}	Input	Input supply voltage
5	V_{REF}	Output	Reference voltage output (V_{REF})

Copyright © 2022 Texas Instruments Incorporated

7 Specifications

7.1 Absolute Maximum Ratings

over operating free-air temperature range (unless otherwise noted)(1)

		MIN	MAX	UNIT
Input voltage	V_{IN}	–0.3	6	V
	EN	–0.3	V_{IN} + 0.3	
Temperature	Operating	–55	150	°C
	Junction, T_j		150	
	Storage, T_{stg}	–65	170	

(1) Stresses beyond those listed under *Absolute Maximum Ratings* may cause permanent damage to the device. These are stress ratings only, which do not imply functional operation of the device at these or any other conditions beyond those indicated under *Recommended Operating Conditions*. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

7.2 ESD Ratings

			VALUE	UNIT
$V_{(ESD)}$	Electrostatic discharge	Human-body model (HBM), per ANSI/ESDA/JEDEC JS-001(1)	±2500	V
		Charged-device model (CDM), per JEDEC specification JESD22-C101(2)	±1500	

(1) JEDEC document JEP155 states that 500-V HBM allows safe manufacturing with a standard ESD control process.
(2) JEDEC document JEP157 states that 250-V CDM allows safe manufacturing with a standard ESD control process.

7.3 Recommended Operating Conditions

over operating free-air temperature range (unless otherwise noted)

		MIN	NOM	MAX	UNIT
V_{IN}	Supply input voltage range (I_L = 0 mA, T_A = 25°C)	V_{REF} + 0.02(1)		5.5	V

(1) See 图 7-28 in 节 7.6 for minimum input voltage at different load currents and temperature

7.4 Thermal Information

THERMAL METRIC(1)		REF20xx DDC (SOT23) 5 PINS	UNIT
$R_{\theta JA}$	Junction-to-ambient thermal resistance	193.6	°C/W
$R_{\theta JC(top)}$	Junction-to-case (top) thermal resistance	40.2	°C/W
$R_{\theta JB}$	Junction-to-board thermal resistance	34.5	°C/W
ψ_{JT}	Junction-to-top characterization parameter	0.9	°C/W
ψ_{JB}	Junction-to-board characterization parameter	34.3	°C/W
$R_{\theta JC(bot)}$	Junction-to-case (bottom) thermal resistance	N/A	°C/W

(1) For more information about traditional and new thermal metrics, see the *Semiconductor and IC Package Thermal Metrics* application report.

Copyright © 2022 Texas Instruments Incorporated

7.5 Electrical Characteristics

At T_A = 25°C, I_L = 0 mA, and V_{IN} = 5 V, unless otherwise noted. Both V_{REF} and V_{BIAS} have the same specifications.

PARAMETER			TEST CONDITIONS		MIN	TYP	MAX	UNIT
ACCURACY AND DRIFT								
	Output voltage accuracy				–0.05%		0.05%	
	Output voltage temperature coefficient(1)		–40°C ≤ T_A ≤ 125°C			±3	±8	ppm/°C
	V_{REF} and V_{BIAS} tracking over temperature(2)		–40°C ≤ T_A ≤ 85°C			±1.5	±6	ppm/°C
			–40°C ≤ T_A ≤ 125°C			±2	±7	
LINE AND LOAD REGULATION								
$\Delta V_{O(\Delta VI)}$	Line regulation		V_{REF} + 0.02 V ≤ V_{IN} ≤ 5.5 V			3	35	ppm/V
$\Delta V_{O(\Delta IL)}$	Load regulation	Sourcing	0 mA ≤ I_L ≤ 20 mA , V_{REF} + 0.6 V ≤ V_{IN} ≤ 5.5 V			8	20	ppm/mA
		Sinking	0 mA ≤ I_L ≤ –20 mA, V_{REF} + 0.02 V ≤ V_{IN} ≤ 5.5 V			8	20	
POWER SUPPLY								
I_{CC}	Supply current	Active mode				360	430	µA
			–40°C ≤ T_A ≤ 125°C				460	
		Shutdown mode				3.3	5	
			–40°C ≤ T_A ≤ 125°C				9	
	Enable voltage		Device in shutdown mode (EN = 0)		0		0.7	V
			Device in active mode (EN = 1)		V_{IN} – 0.7		V_{IN}	
	Dropout voltage					10	20	mV
			I_L = 20 mA				600	
I_{SC}	Short-circuit current					50		mA
t_{on}	Turn-on time		0.1% settling, C_L = 1 µF			500		µs
NOISE								
	Low-frequency noise(3)		0.1 Hz ≤ f ≤ 10 Hz			12		ppm_{PP}
	Output voltage noise density		f = 100 Hz			0.25		ppm/$\sqrt{Hz}$
CAPACITIVE LOAD								
	Stable output capacitor range				0		10	µF
HYSTERESIS AND LONG TERM STABILITY								
	Long-term stability(4)		0 to 1000 hours			25		ppm
	Output voltage hysteresis(5)		25°C, –40°C, 125°C, 25°C	Cycle 1		60		ppm
				Cycle 2		35		

(1) Temperature drift is specified according to the box method. See the *9.3* section for more details.
(2) The V_{REF} and V_{BIAS} tracking over temperature specification is explained in more detail in the *9.3* section.
(3) The peak-to-peak noise measurement procedure is explained in more detail in the *8.4* section.
(4) Long-term stability measurement procedure is explained in more in detail in the 8.2 section.
(5) The thermal hysteresis measurement procedure is explained in more detail in the *8.3* section.

Copyright © 2022 Texas Instruments Incorporated

7.6 Typical Characteristics

At T_A = 25°C, I_L = 0 mA, V_{IN} = 5-V power supply, C_L = 0 µF, and 2.5-V output, unless otherwise noted.


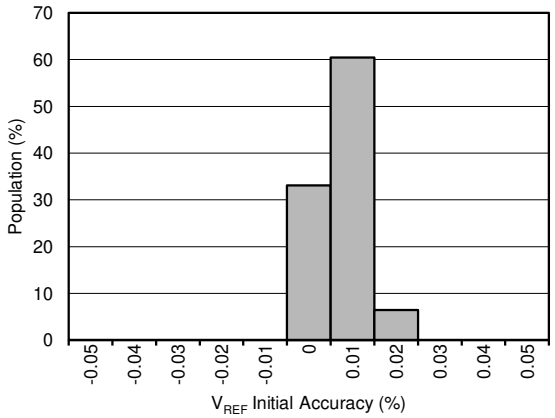


图 7-1. Initial Accuracy Distribution (V_{REF})

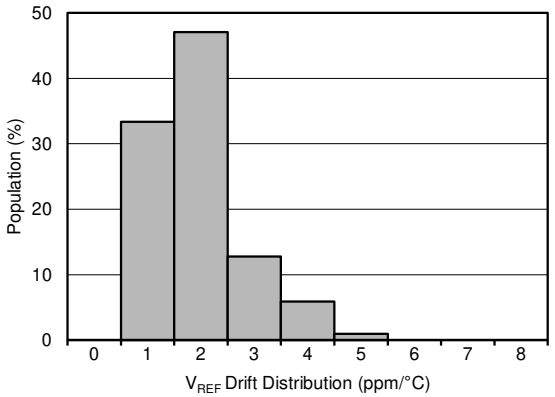

– 40°C ≤ T_A ≤ 125°C

图 7-2. Drift Distribution (V_{REF})


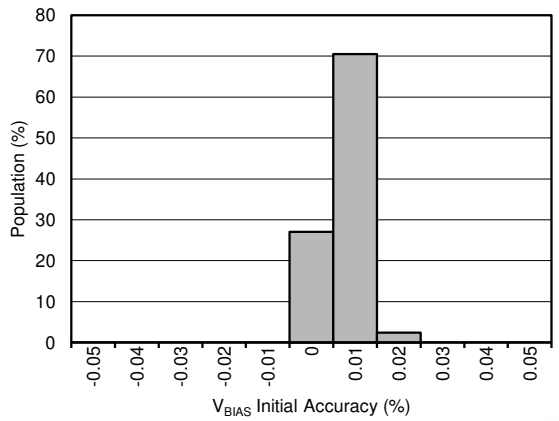


图 7-3. Initial Accuracy Distribution (V_{BIAS})

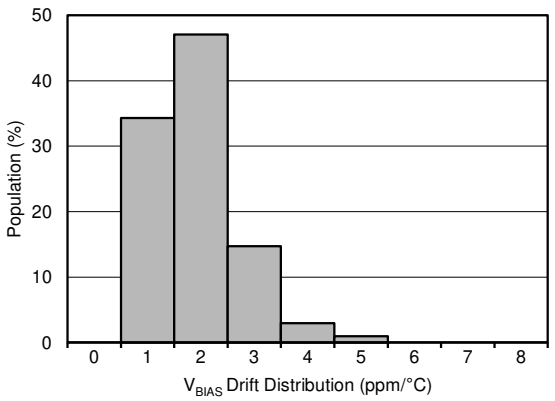

– 40°C ≤ T_A ≤ 125°C

图 7-4. Drift Distribution (V_{BIAS})


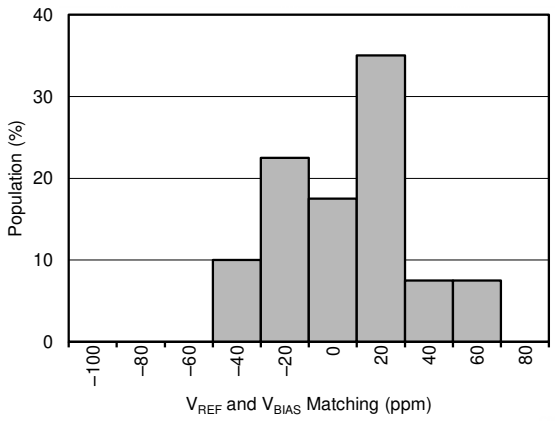


图 7-5. V_{REF} – 2 × V_{BIAS} Distribution

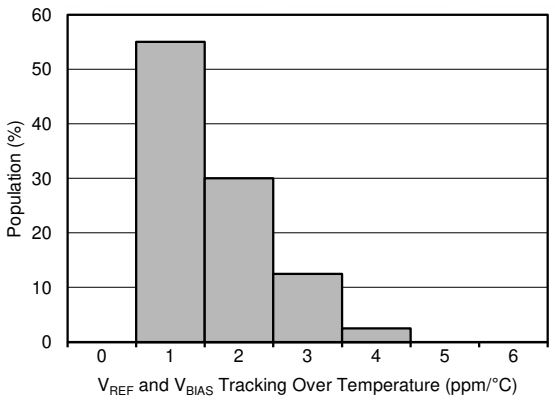


– 40°C ≤ T_A ≤ 85°C

图 7-6. Distribution of V_{REF} – 2 × V_{BIAS} Drift Tracking Over Temperature

Copyright © 2022 Texas Instruments Incorporated


7.6 Typical Characteristics (continued)

At T_A = 25°C, I_L = 0 mA, V_{IN} = 5-V power supply, C_L = 0 µF, and 2.5-V output, unless otherwise noted.

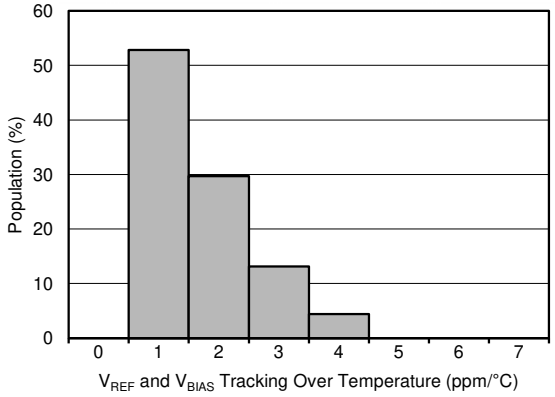


– 40°C ≤ T_A ≤ 125°C

图 7-7. Distribution of V_{REF} – 2 × V_{BIAS} Drift Tracking Over Temperature

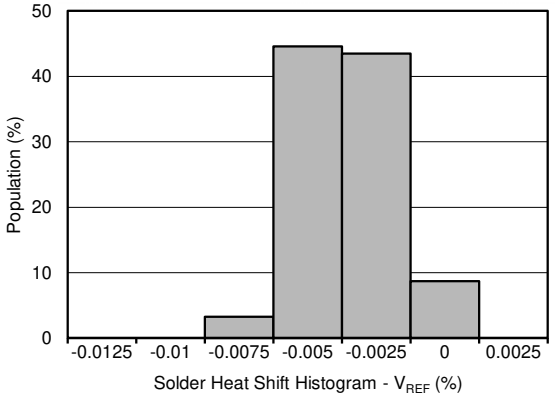

Refer to the 节 8.1 section for more information.

图 7-8. Solder Heat Shift Distribution (V_{REF})

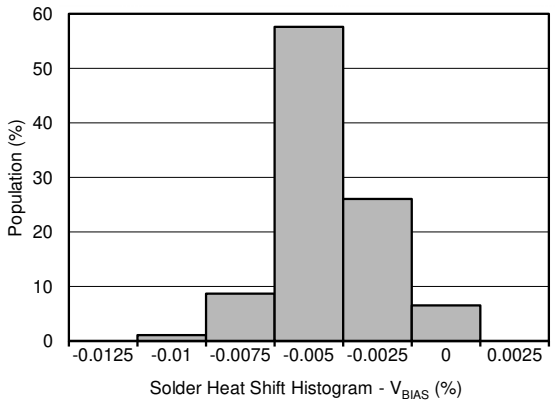

Refer to the 节 8.1 section for more information.

图 7-9. Solder Heat Shift Distribution (V_{BIAS})

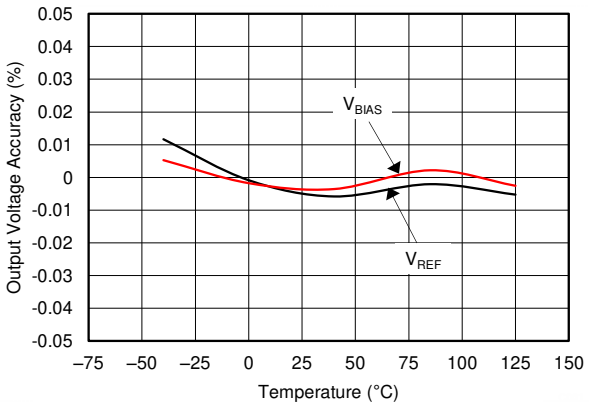


图 7-10. Output Voltage Accuracy (V_{REF}) vs Temperature


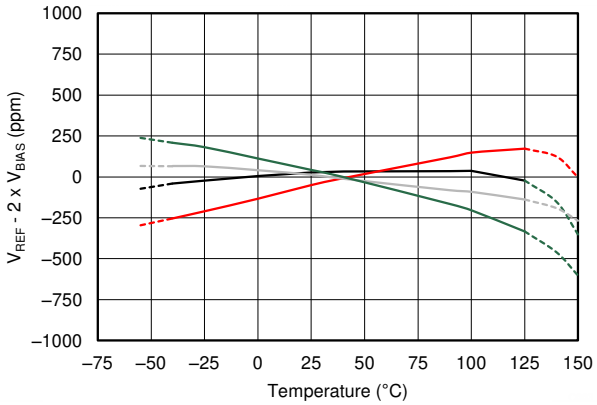


图 7-11. V_{REF} – 2 × V_{BIAS} Tracking vs Temperature

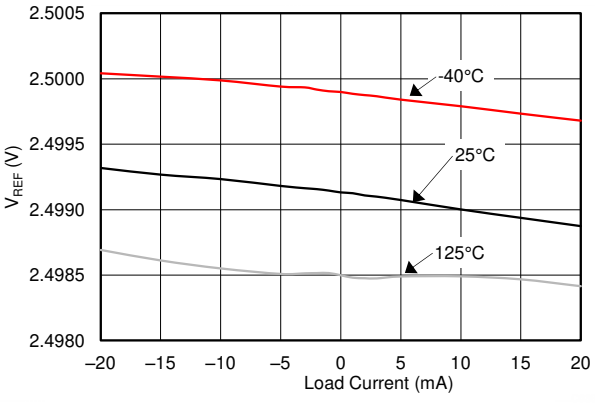

V_{REF} output

图 7-12. Output Voltage Change vs Load Current (V_{REF})

7.6 Typical Characteristics (continued)

At T_A = 25°C, I_L = 0 mA, V_{IN} = 5-V power supply, C_L = 0 µF, and 2.5-V output, unless otherwise noted.

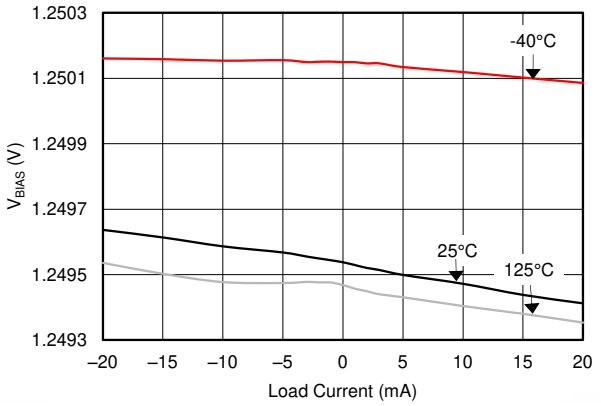


图 7-13. Output Voltage Change vs Load Current (V_{BIAS})

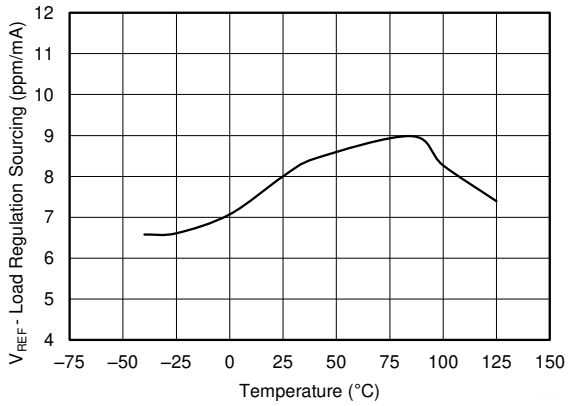


图 7-14. Load Regulation Sourcing vs Temperature (V_{REF})

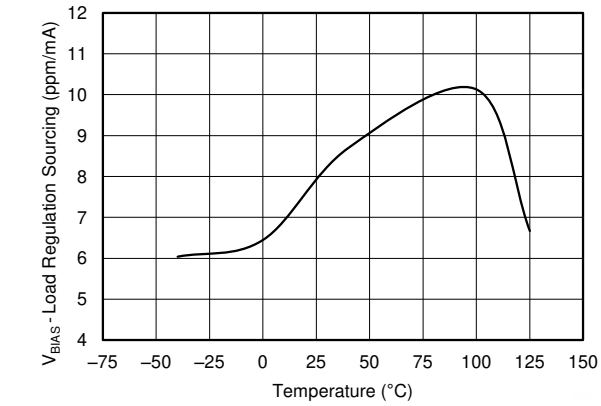


图 7-15. Load Regulation Sourcing vs Temperature (V_{BIAS})

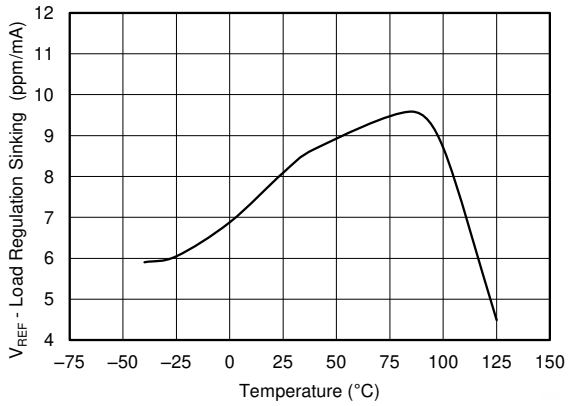


图 7-16. Load Regulation Sinking vs Temperature (V_{REF})

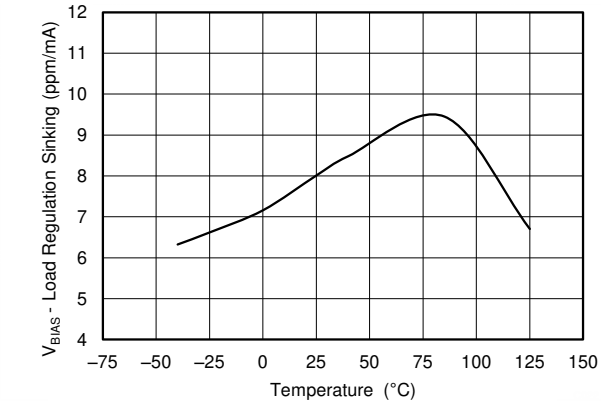


图 7-17. Load Regulation Sinking vs Temperature (V_{BIAS})


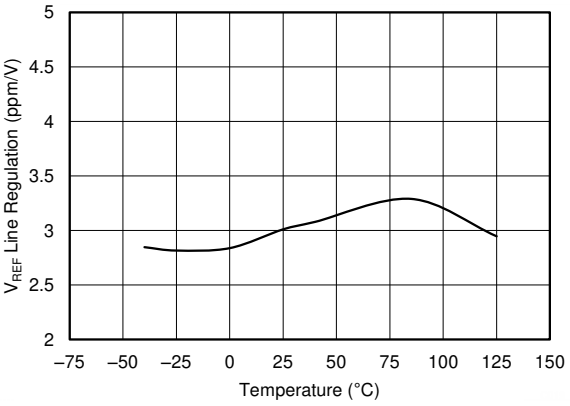


图 7-18. Line Regulation vs Temperature (V_{REF})

Copyright © 2022 Texas Instruments Incorporated


7.6 Typical Characteristics (continued)

At T_A = 25°C, I_L = 0 mA, V_{IN} = 5-V power supply, C_L = 0 µF, and 2.5-V output, unless otherwise noted.

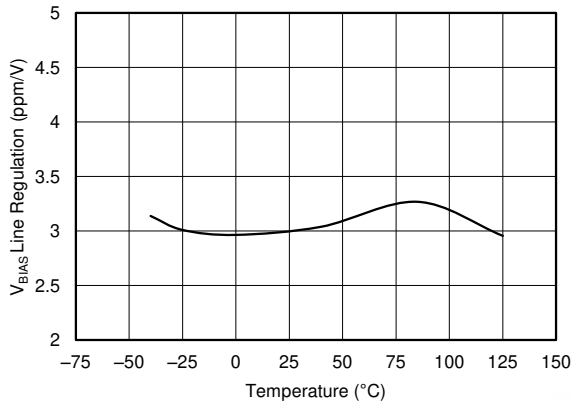


V_{BIAS} output

图 7-19. Line Regulation vs Temperature (V_{BIAS})

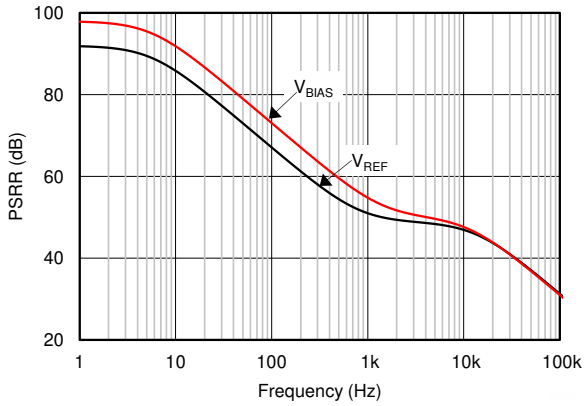


C_L = 0 µF

图 7-20. Power-Supply Rejection Ratio vs Frequency

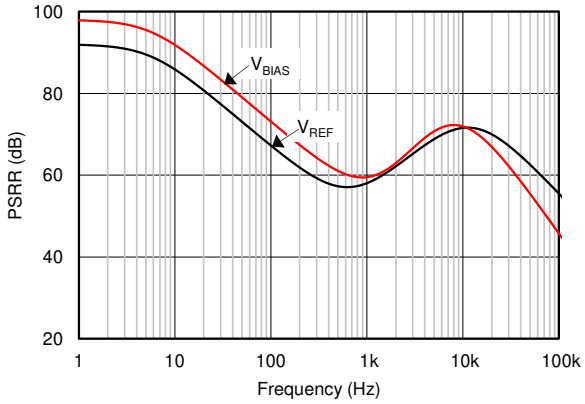


C_L = 10 µF

图 7-21. Power-Supply Rejection Ratio vs Frequency

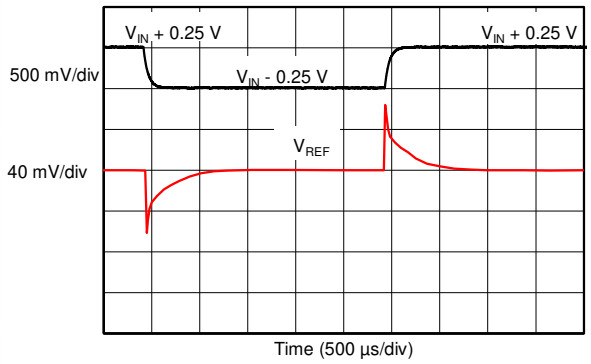


C_L = 1 µF

图 7-22. Line Transient Response

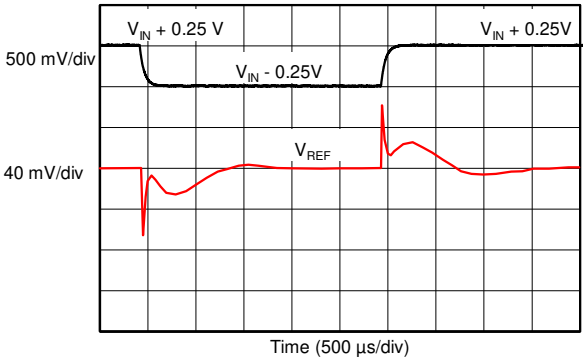

C_L = 10 µF

图 7-23. Line Transient Response

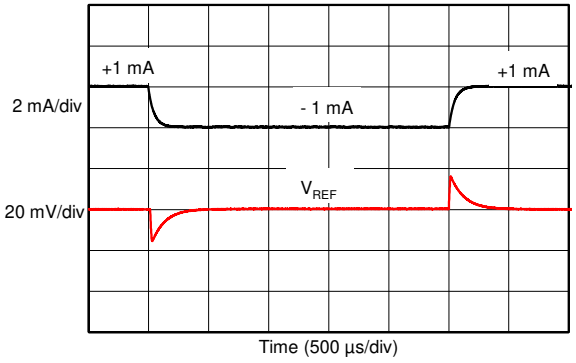


C_L = 1 µF I_L = ±1-mA step

图 7-24. Load Transient Response

Copyright © 2022 Texas Instruments Incorporated


7.6 Typical Characteristics (continued)

At T_A = 25°C, I_L = 0 mA, V_{IN} = 5-V power supply, C_L = 0 µF, and 2.5-V output, unless otherwise noted.

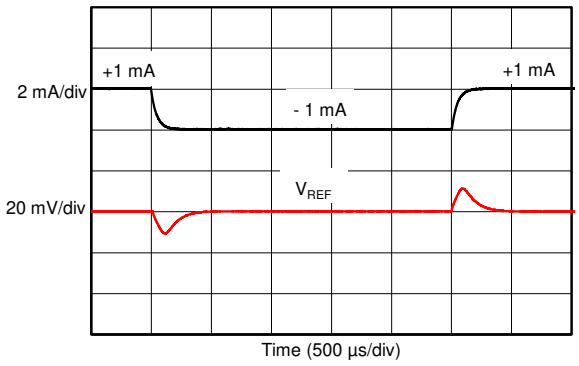


C_L = 10 µF I_L = ±1-mA step

图 7-25. Load Transient Response

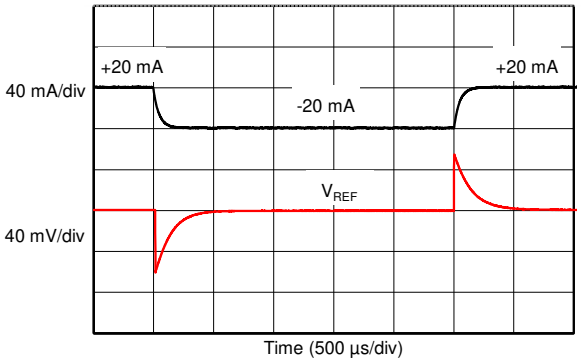

C_L = 1 µF I_L = ±20-mA step

图 7-26. Load Transient Response

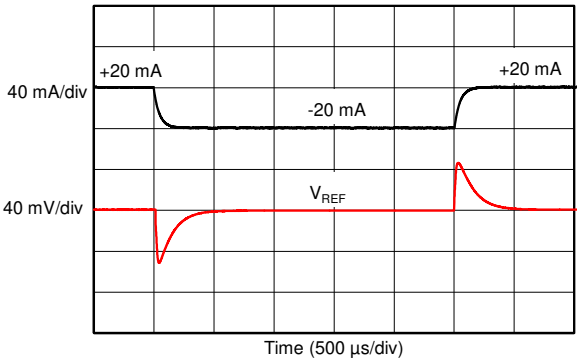

C_L = 10 µF I_L = ±20-mA step

图 7-27. Load Transient Response



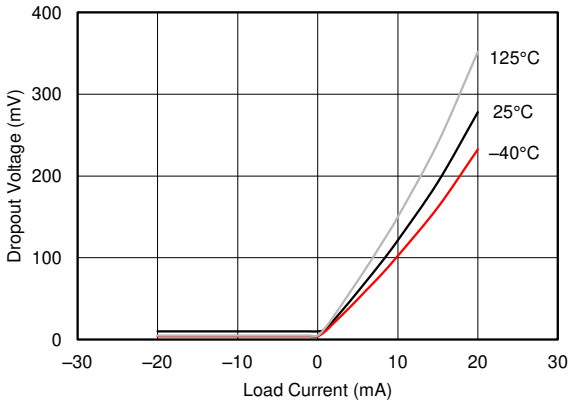


图 7-28. Minimum Dropout Voltage vs Load Current

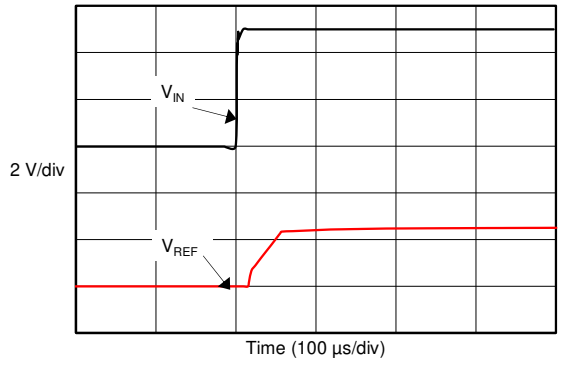

C_L = 1 µF

图 7-29. Turn-On Settling Time

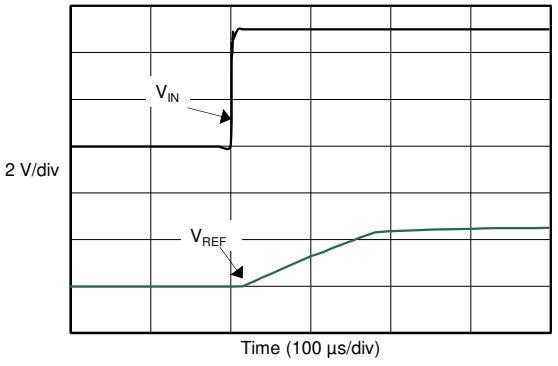

C_L = 10 µF

图 7-30. Turn-On Settling Time

Copyright © 2022 Texas Instruments Incorporated

7.6 Typical Characteristics (continued)

At T_A = 25°C, I_L = 0 mA, V_{IN} = 5-V power supply, C_L = 0 µF, and 2.5-V output, unless otherwise noted.

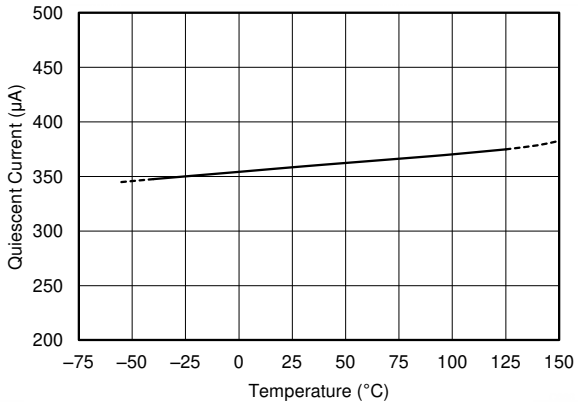


图 7-31. Quiescent Current vs Temperature



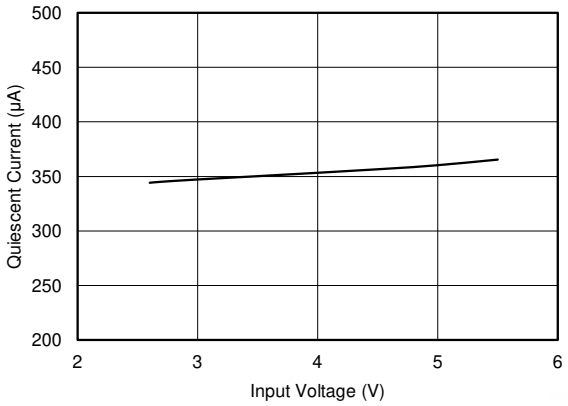


图 7-32. Quiescent Current vs Input Voltage

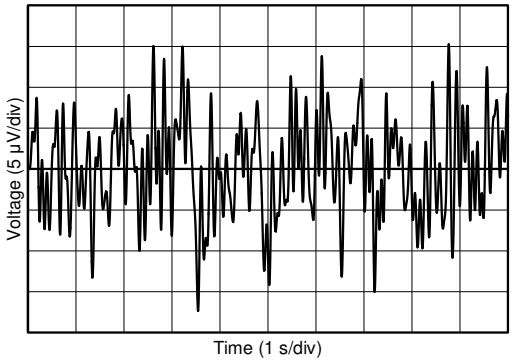

V_{REF} output

图 7-33. 0.1-Hz to 10-Hz Noise (V_{REF})

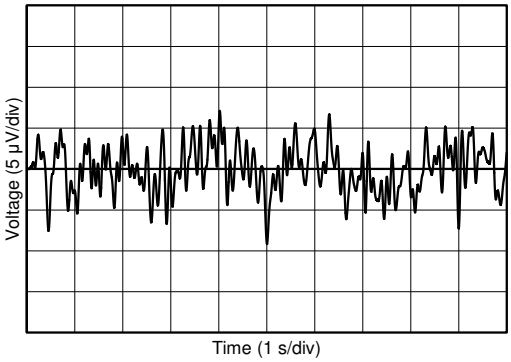

V_{BIAS} output

图 7-34. 0.1-Hz to 10-Hz Noise (V_{BIAS})


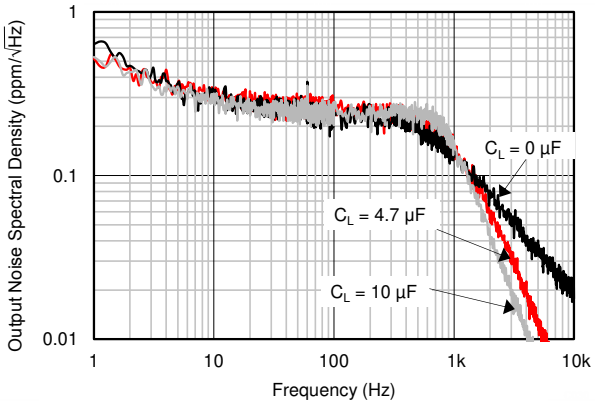


图 7-35. Output Voltage Noise Spectrum

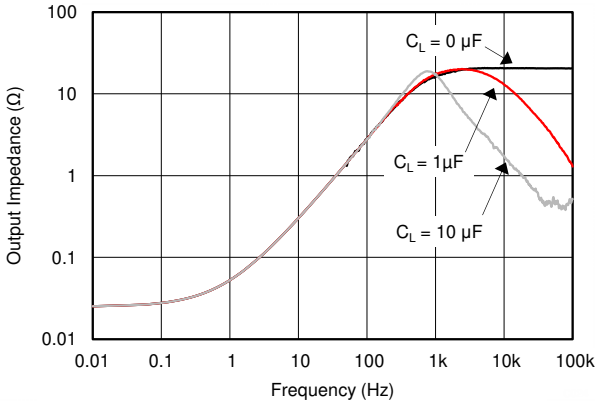

V_{REF} output

图 7-36. Output Impedance vs Frequency (V_{REF})

7.6 Typical Characteristics (continued)

At T_A = 25°C, I_L = 0 mA, V_{IN} = 5-V power supply, C_L = 0 µF, and 2.5-V output, unless otherwise noted.

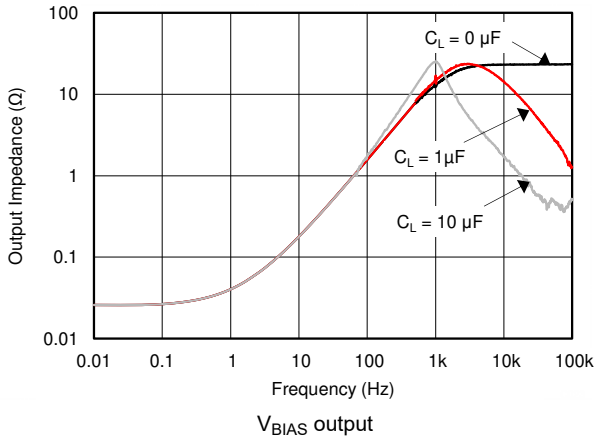


图 7-37. Output Impedance vs Frequency (V_{BIAS})

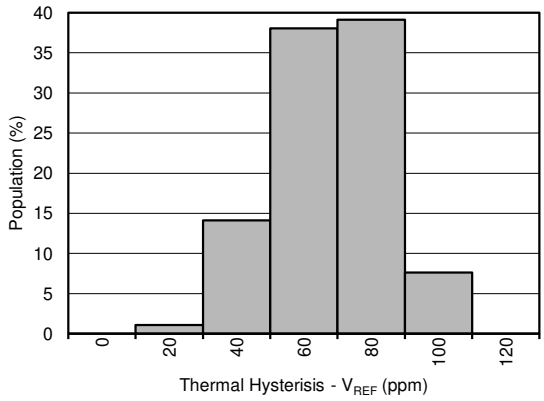


图 7-38. Thermal Hysteresis Distribution (V_{REF})

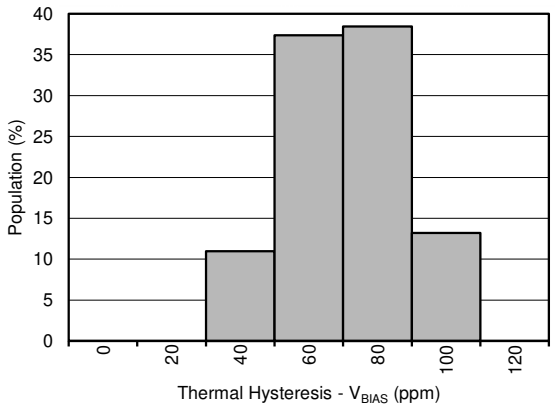


图 7-39. Thermal Hysteresis Distribution (V_{BIAS})

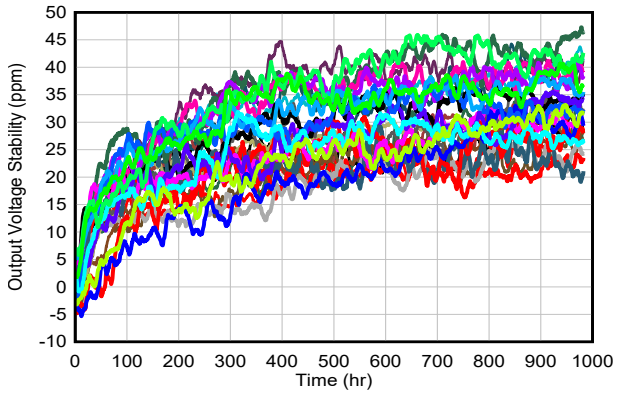


图 7-40. Long-Term Stability (First 1000 hours)

Copyright © 2022 Texas Instruments Incorporated

8 Parameter Measurement Information

8.1 Solder Heat Shift

The materials used in the manufacture of the REF20xx have differing coefficients of thermal expansion, resulting in stress on the device die when the part is heated. Mechanical and thermal stress on the device die can cause the output voltages to shift, degrading the initial accuracy specifications of the product. Reflow soldering is a common cause of this error.

In order to illustrate this effect, a total of 92 devices were soldered on four printed circuit boards [23 devices on each printed circuit board (PCB)] using lead-free solder paste and the paste manufacturer suggested reflow profile. The reflow profile is as shown in 图 8-1. The printed circuit board is comprised of FR4 material. The board thickness is 1.57 mm and the area is 171.54 mm × 165.1 mm.

The reference and bias output voltages are measured before and after the reflow process; the typical shift is displayed in 图 8-2 and 图 8-3. Although all tested units exhibit very low shifts (< 0.01%), higher shifts are also possible depending on the size, thickness, and material of the printed circuit board. An important note is that the histograms display the typical shift for exposure to a single reflow profile. Exposure to multiple reflows, as is common on PCBs with surface-mount components on both sides, causes additional shifts in the output bias voltage. If the PCB is exposed to multiple reflows, the device should be soldered in the second pass to minimize its exposure to thermal stress.

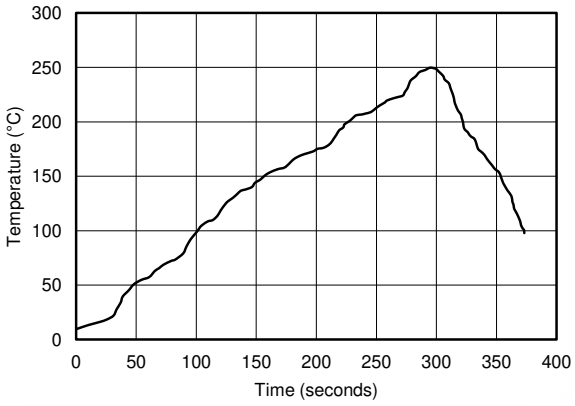


图 8-1. Reflow Profile

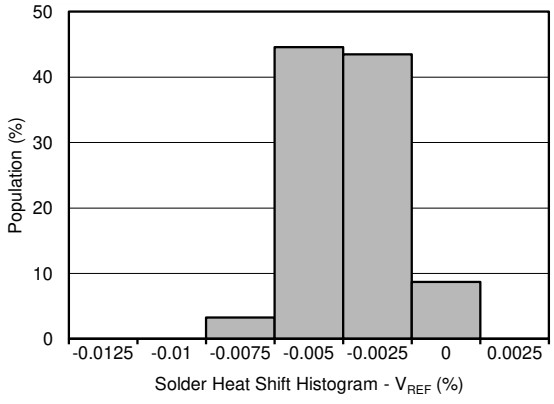


图 8-2. Solder Heat Shift Distribution, V_{REF} (%)

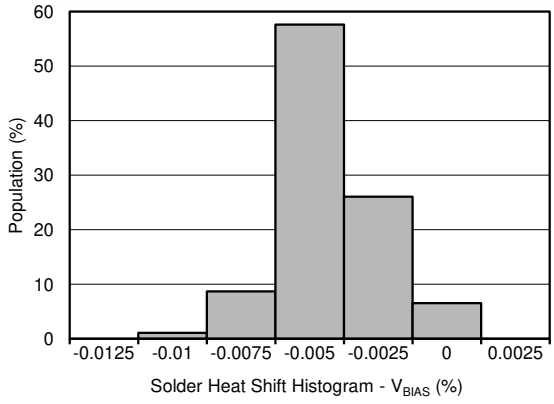


图 8-3. Solder Heat Shift Distribution, V_{BIAS} (%)

Copyright © 2022 Texas Instruments Incorporated

8.2 Long-Term Stability

The long term stability of the REF20xx was collected on 32 parts that were soldered onto Printed Circuit Boards without any slots or special layout considerations. The boards were then placed into an oven with air temperature maintained at T_A = 35°C. The V_{REF} output of the 32 parts was measured regularly. Typical long term stability is as shown in 图 8-4.

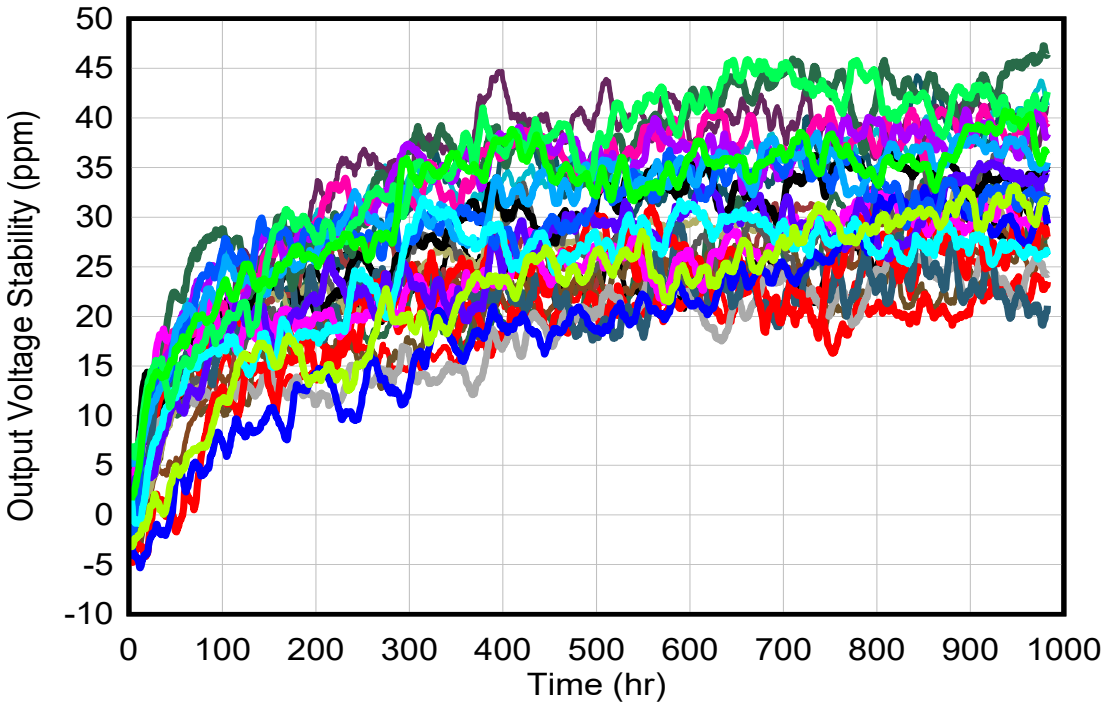


图 8-4. Long Term Stability – 1000 hours (V_{REF})

Copyright © 2022 Texas Instruments Incorporated

8.3 Thermal Hysteresis

Thermal hysteresis is measured with the REF20xx soldered to a PCB, similar to a real-world application. Thermal hysteresis for the device is defined as the change in output voltage after operating the device at 25°C, cycling the device through the specified temperature range, and returning to 25°C. Hysteresis can be expressed by 方程式 1:

$$V_{HYST} = \left(\frac{\left| V_{PRE} - V_{POST} \right|}{V_{NOM}} \right) \bullet 10^6 \quad \text{(ppm)} \tag{1}$$

where

- V_{HYST} = thermal hysteresis (in units of ppm),
- V_{NOM} = the specified output voltage,
- V_{PRE} = output voltage measured at 25°C pre-temperature cycling, and
- V_{POST} = output voltage measured after the device has cycled from 25°C through the specified temperature range of –40°C to 125°C and returns to 25°C.

Typical thermal hysteresis distribution is as shown in 图 8-5 and 图 8-6.

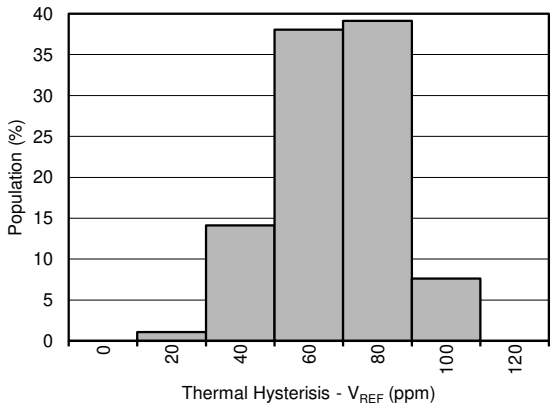


图 8-5. Thermal Hysteresis Distribution (V_{REF})

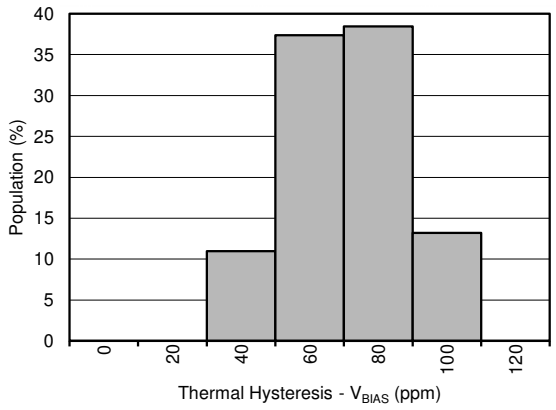


图 8-6. Thermal Hysteresis Distribution (V_{BIAS})

8.4 Noise Performance

Typical 0.1-Hz to 10-Hz voltage noise can be seen in 图 8-7 and 图 8-8. Device noise increases with output voltage and operating temperature. Additional filtering can be used to improve output noise levels, although care should be taken to ensure the output impedance does not degrade ac performance. Peak-to-peak noise measurement setup is shown in 图 8-9.

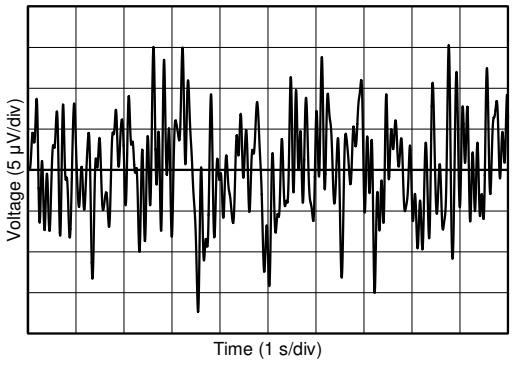


图 8-7. 0.1-Hz to 10-Hz Noise (V_{REF})

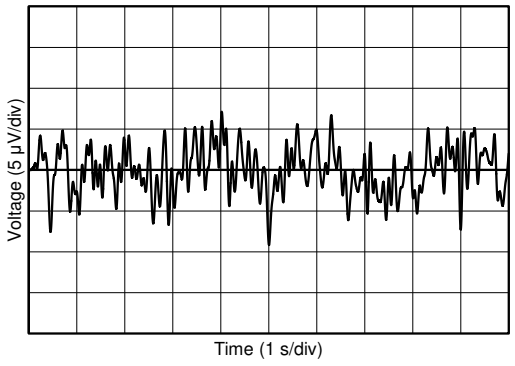


图 8-8. 0.1-Hz to 10-Hz Noise (V_{BIAS})

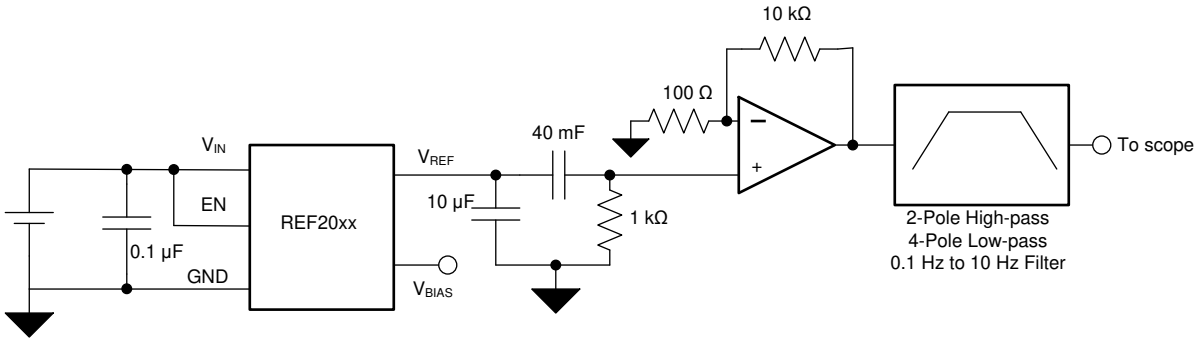


图 8-9. 0.1-Hz to 10-Hz Noise Measurement Setup

Copyright © 2022 Texas Instruments Incorporated


9 Detailed Description

9.1 Overview

The REF20xx are a family of dual-output, V_{REF} and V_{BIAS} (V_{REF} / 2) band-gap voltage references. The 节 9.2 section provides a block diagram of the basic band-gap topology and the two buffers used to derive the V_{REF} and V_{BIAS} outputs. Transistors Q_1 and Q_2 are biased such that the current density of Q_1 is greater than that of Q_2. The difference of the two base emitter voltages (V_{BE1} – V_{BE2}) has a positive temperature coefficient and is forced across resistor R_5. The voltage is amplified and added to the base emitter voltage of Q_2, which has a negative temperature coefficient. The resulting band-gap output voltage is almost independent of temperature. Two independent buffers are used to generate V_{REF} and V_{BIAS} from the band-gap voltage. The resistors R_1, R_2 and R_3, R_4 are sized such that $V_{BIAS} = V_{REF} / 2$.

e-Trim™ is a method of package-level trim for the initial accuracy and temperature coefficient of V_{REF} and V_{BIAS}, implemented during the final steps of manufacturing after the plastic molding process. This method minimizes the influence of inherent transistor mismatch, as well as errors induced during package molding. e-Trim is implemented in the REF20xx to minimize the temperature drift and maximize the initial accuracy of both the V_{REF} and V_{BIAS} outputs.

9.2 Functional Block Diagram

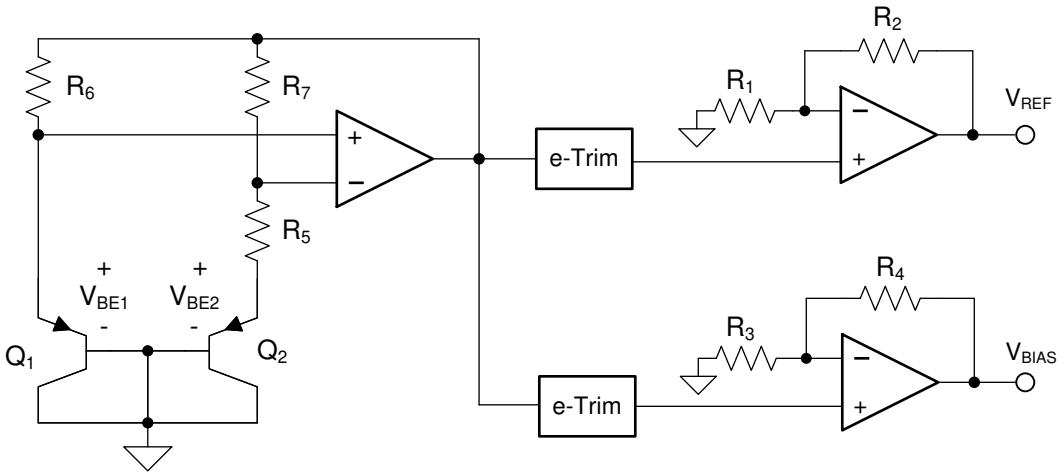

9.3 Feature Description

9.3.1 V_{REF} and V_{BIAS} Tracking

Most single-supply systems require an additional stable voltage in the middle of the analog-to-digital converter (ADC) input range to bias input bipolar signals. The V_{REF} and V_{BIAS} outputs of the REF20xx are generated from the same band-gap voltage as shown in the 节 9.2 section. Hence, both outputs track each other over the full temperature range of –40°C to 125°C with an accuracy of 7 ppm/°C (maximum). The tracking accuracy increases to 6 ppm/°C (maximum) when the temperature range is limited to –40°C to 85°C. The tracking error is calculated using the box method, as described by 方程式 2:

$$\text{Tracking Error} = \left(\frac{V_{DIFF(MAX)} - V_{DIFF\ (MIN)}}{V_{REF} \bullet \text{Temperature Range}} \right) \bullet 10^6 \quad \text{(ppm)} \tag{2}$$

where

- $V_{DIFF} = V_{REF} - 2 \bullet V_{BIAS}$

The tracking accuracy is as shown in 图 9-1.

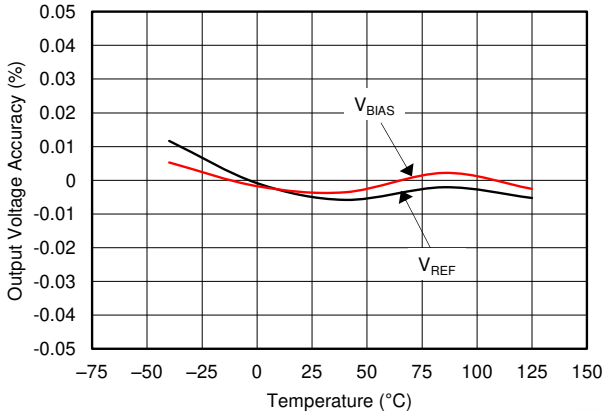


图 9-1. V_{REF} and V_{BIAS} Tracking vs Temperature

9.3.2 Low Temperature Drift

The REF20xx is designed for minimal drift error, which is defined as the change in output voltage over temperature. The drift is calculated using the box method, as described by 方程式 3:

$$\text{Drift} = \left(\frac{V_{REF(MAX)} - V_{REF(MIN)}}{V_{REF} \bullet \text{Temperature Range}} \right) \bullet 10^6 \quad \text{(ppm)} \tag{3}$$

9.3.3 Load Current

The REF20xx family is specified to deliver a current load of ±20 mA per output. Both the V_{REF} and V_{BIAS} outputs of the device are protected from short circuits by limiting the output short-circuit current to 50 mA. The device temperature increases according to 方程式 4:

$$T_J = T_A + P_D \bullet R_{\theta JA} \tag{4}$$

where

- T_J = junction temperature (°C),
- T_A = ambient temperature (°C),
- P_D = power dissipated (W), and
- $R_{\theta JA}$ = junction-to-ambient thermal resistance (°C/W)

The REF20xx maximum junction temperature must not exceed the absolute maximum rating of 150°C.

9.4 Device Functional Modes

When the EN pin of the REF20xx is pulled high, the device is in active mode. The device should be in active mode for normal operation. The REF20xx can be placed in a low-power mode by pulling the ENABLE pin low. When in shutdown mode, the output of the device becomes high impedance and the quiescent current of the device reduces to 5 µA in shutdown mode. See the 节 *7.5* for logic high and logic low voltage levels.

Copyright © 2022 Texas Instruments Incorporated

10 Applications and Implementation

备注

以下应用部分中的信息不属于 TI 器件规格的范围，TI 不担保其准确性和完整性。TI 的客 户应负责确定器件是否适用于其应用。客户应验证并测试其设计，以确保系统功能。

10.1 Application Information

The low-drift, bidirectional, single-supply, low-side, current-sensing solution, described in this section, can accurately detect load currents from –2.5 A to 2.5 A. The linear range of the output is from 250 mV to 2.75 V. Positive current is represented by output voltages from 1.5 V to 2.75 V, whereas negative current is represented by output voltages from 250 mV to 1.5 V. The difference amplifier is the INA213 current-shunt monitor, whose supply and reference voltages are supplied by the low-drift REF2030.

Industrial applications with electronics in corrosive environments are susceptible to corrosive damage due to the exposure to heat, moisture, and corrosive gases. The combination of the following conditions in a given system lead to higher risk of corrosive damage:

1. Ventilated enclosures exposing underlying PCB.
2. PCBs not conformally coated.
3. Exposed-lead components with plating susceptible to corrosion.
4. Changes in plating techniques for RoHS compliance (e.g. removal of Pb (lead) and certain types of plating).

To improve resistance to corrosion in harsh environments, the REF2025AISDDCR uses Matte-Sn plating with improved assembly process to reduce exposed Cu, leading to improved corrosion resistance in the Battelle Class III and similar harsh environments. The “S” in the part number identifies this special plating option. REF2025 versions that do not have the “S” will continue to be available in industry standard NiPdAu processing technique.

Copyright © 2022 Texas Instruments Incorporated

10.2 Typical Application

10.2.1 Low-Side, Current-Sensing Application

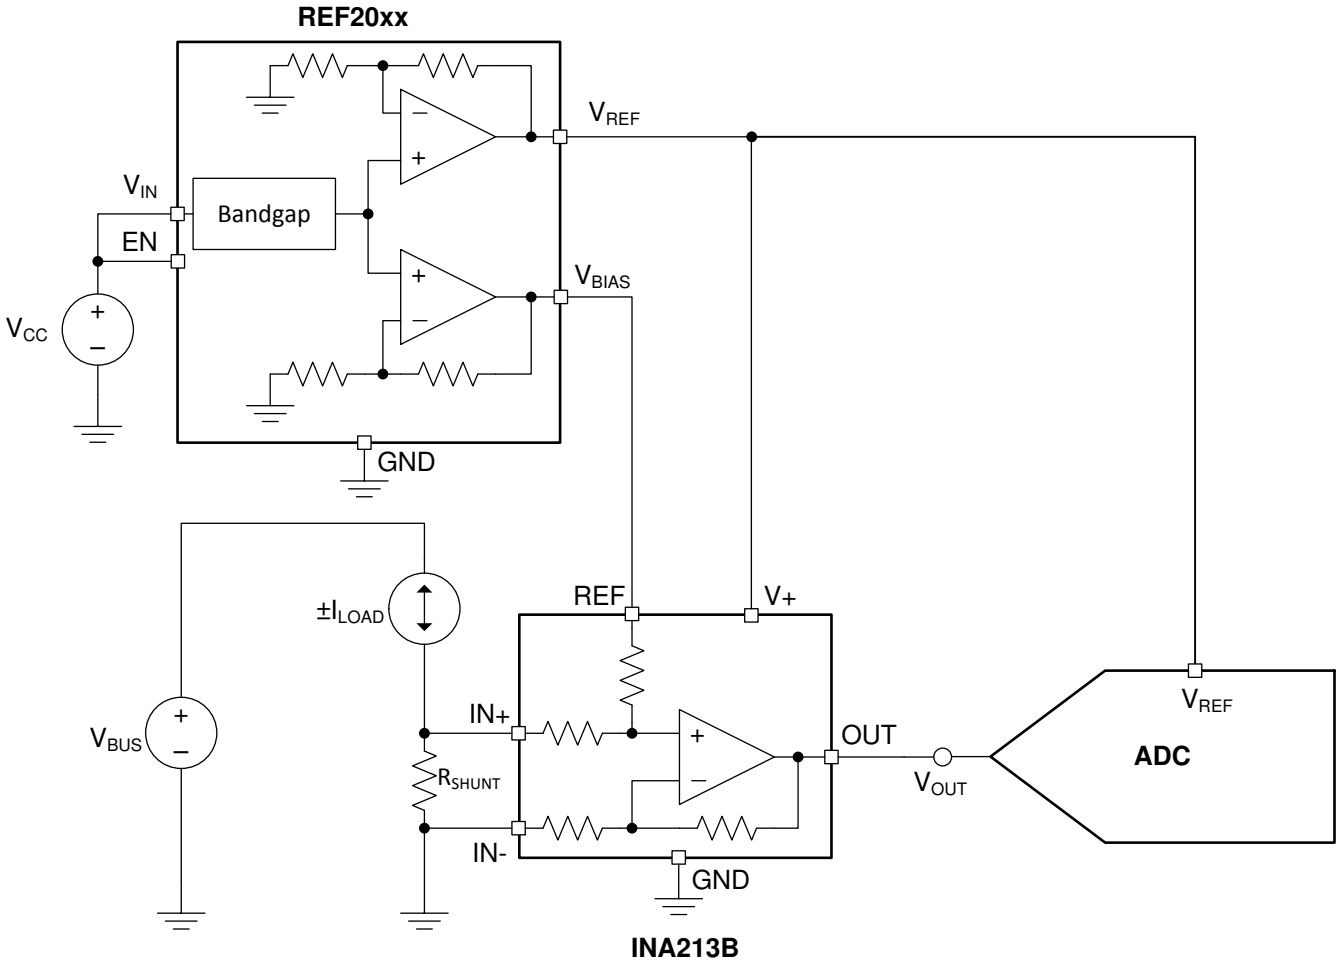


图 10-1. Low-Side, Current-Sensing Application

Copyright © 2022 Texas Instruments Incorporated

10.2.1.1 Design Requirements

The design requirements are as follows:

1. Supply voltage: 5.0 V
2. Load current: ±2.5 A
3. Output: 250 mV to 2.75 V
4. Maximum shunt voltage: ±25 mV

10.2.1.2 Detailed Design Procedure

Low-side current sensing is desirable because the common-mode voltage is near ground. Therefore, the current-sensing solution is independent of the bus voltage, V_{BUS}. When sensing bidirectional currents, use a differential amplifier with a reference pin. This procedure allows for the differentiation between positive and negative currents by biasing the output stage such that it can respond to negative input voltages. There are a variety of methods for supplying power (V+) and the reference voltage (V_{REF}, or V_{BIAS}) to the differential amplifier. For a low-drift solution, use a monolithic reference that supplies both power and the reference voltage. 图 10-2 shows the general circuit topology for a low-drift, low-side, bidirectional, current-sensing solution. This topology is particularly useful when interfacing with an ADC; see 图 10-1. Not only do V_{REF} and V_{BIAS} track over temperature, but their matching is much better than alternate topologies. For a more detailed version of the design procedure, refer to TIDU357.

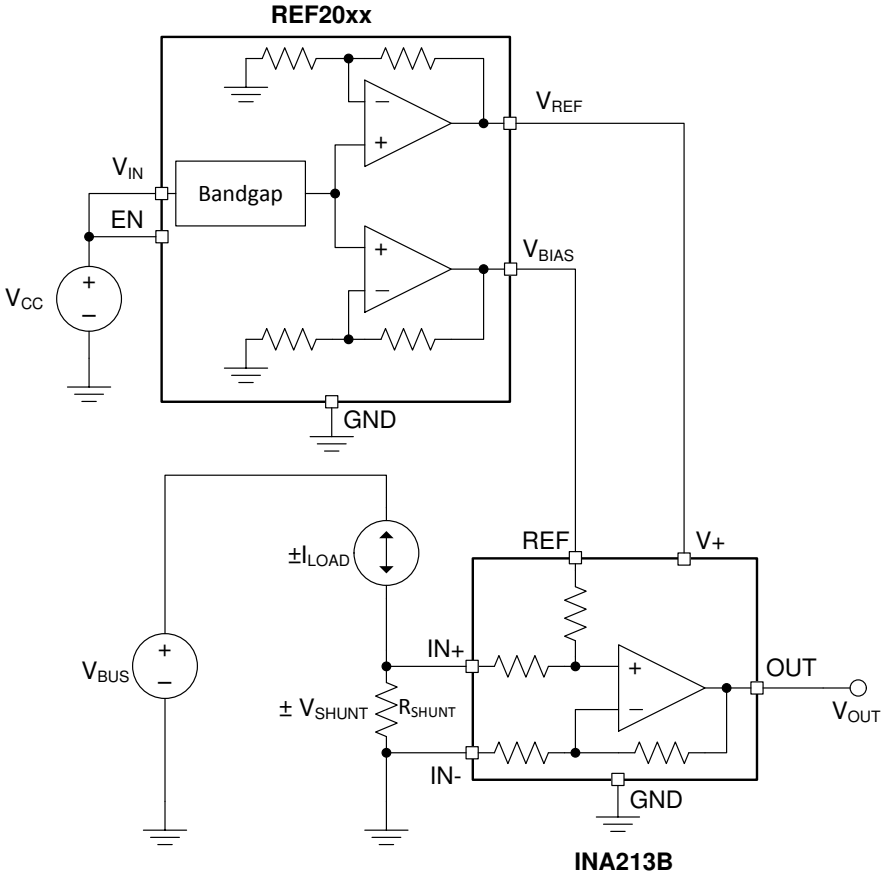


图 10-2. Low-Drift, Low-side, Bidirectional, Current-Sensing Circuit Topology

The transfer function for the circuit given in 图 10-2 is as shown in 方程式 5:

$$V_{OUT} = G \bullet (\pm V_{SHUNT}) + V_{BIAS}$$
$$= G \bullet (\pm I_{LOAD} \bullet R_{SHUNT}) + V_{BIAS} \quad (5)$$

10.2.1.2.1 Shunt Resistor

As illustrated in 图 10-2, the value of V_{SHUNT} is the ground potential for the system load. If the value of V_{SHUNT} is too large, issues may arise when interfacing with systems whose ground potential is actually 0 V. Also, a value of V_{SHUNT} that is too negative may violate the input common-mode voltage of the differential amplifier in addition to potential interfacing issues. Therefore, limiting the voltage across the shunt resistor is important. 方程式 6 can be used to calculate the maximum value of R_{SHUNT}.

$$R_{SHUNT(max)} = \frac{V_{SHUNT(max)}}{I_{LOAD(max)}} \tag{6}$$

Given that the maximum shunt voltage is ±25 mV and the load current range is ±2.5 A, the maximum shunt resistance is calculated as shown in 方程式 7.

$$R_{SHUNT\,(max)} = \frac{V_{SHUNT\,(max)}}{I_{LOAD\,(max)}} = \frac{25mV}{2.5A} = 10m\Omega \tag{7}$$


To minimize errors over temperature, select a low-drift shunt resistor. To minimize offset error, select a shunt resistor with the lowest tolerance. For this design, the Y14870R01000B9W resistor is used.

10.2.1.2.2 Differential Amplifier

The differential amplifier used for this design should have the following features:

1. Single-supply (3 V),
2. Reference voltage input,
3. Low initial input offset voltage (V_{OS}),
4. Low-drift,
5. Fixed gain, and
6. Low-side sensing (input common-mode range below ground).

For this design, a current-shunt monitor (INA213) is used. The INA21x family topology is shown in 图 10-3. The INA213B specifications can be found in the INA213 product data sheet.

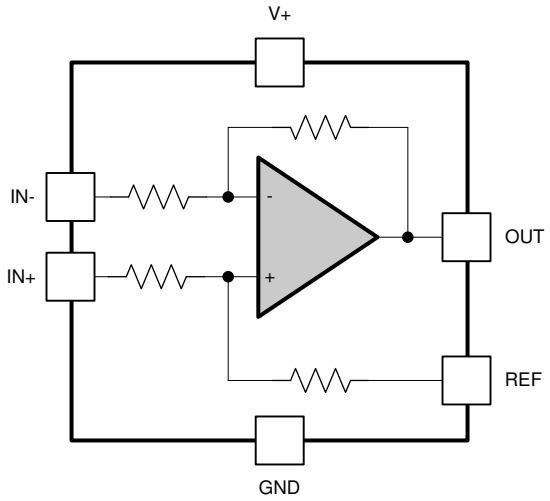

Copyright © 2017, Texas Instruments Incorporated

图 10-3. INA21x Current-Shunt Monitor Topology

The INA213B is an excellent choice for this application because all the required features are included. In general, instrumentation amplifiers (INAs) do not have the input common-mode swing to ground that is essential for this application. In addition, INAs require external resistors to set their gain, which is not desirable for low-drift applications. Difference amplifiers typically have larger input bias currents, which reduce solution accuracy at

Copyright © 2022 Texas Instruments Incorporated

small load currents. Difference amplifiers typically have a gain of 1 V/V. When the gain is adjustable, these amplifiers use external resistors that are not conducive to low-drift applications.

10.2.1.2.3 Voltage Reference

The voltage reference for this application should have the following features:

1. Dual output (3.0 V and 1.5 V),
2. Low drift, and
3. Low tracking errors between the two outputs.

For this design, the REF2030 is used. The REF20xx topology is as shown in the 节 9.2 section.

The REF2030 is an excellent choice for this application because of its dual output. The temperature drift of 8 ppm/°C and initial accuracy of 0.05% make the errors resulting from the voltage reference minimal in this application. In addition, there is minimal mismatch between the two outputs and both outputs track very well across temperature, as shown in 图 10-4 and 图 10-5.

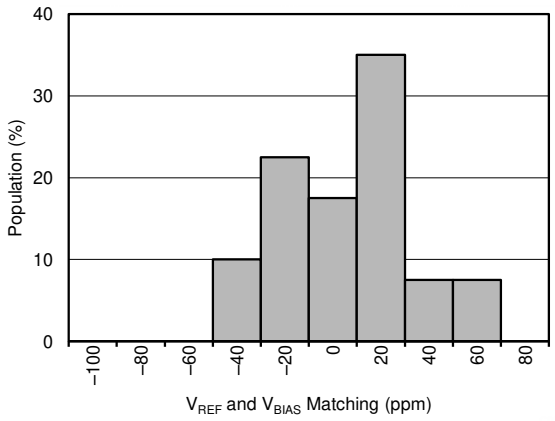


图 10-4. V_{REF} – 2 × V_{BIAS} Distribution (At T_A = 25°C)

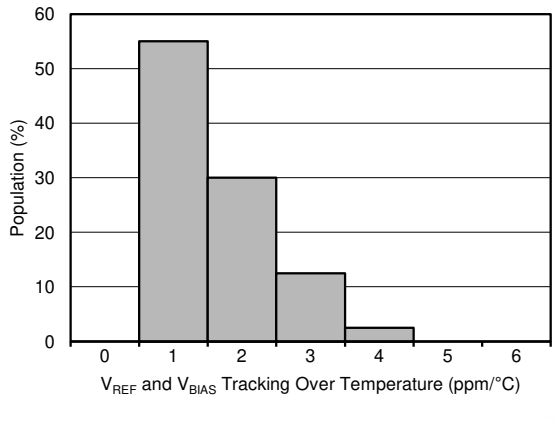


图 10-5. Distribution of V_{REF} – 2 × V_{BIAS} Drift Tracking Over Temperature

10.2.1.2.4 Results

表 10-1 summarizes the measured results.

表 10-1. Measured Results

ERROR	UNCALIBRATED (%)	CALIBRATED (%)
Error across the full load current range (25°C)	±0.0355	±0.004
Error across the full load current range (– 40°C to 125°C)	±0.0522	±0.0606

Copyright © 2022 Texas Instruments Incorporated

10.2.1.3 Application Curves

Performing a two-point calibration at 25°C removes the errors associated with offset voltage, gain error, and so forth. 图 10-6 to 图 10-8 show the measured error at different conditions. For a more detailed description on measurement procedure, calibration, and calculations, please refer to TIDU357.

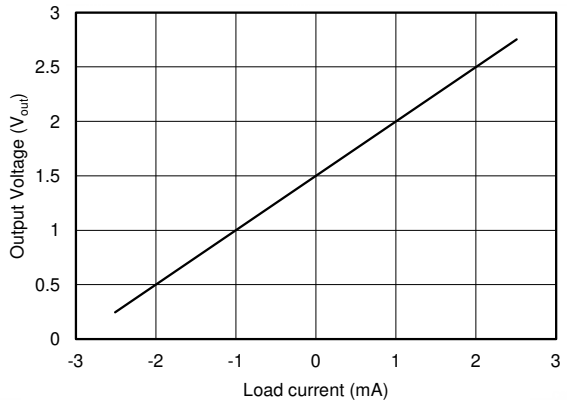


图 10-6. Measured Transfer Function

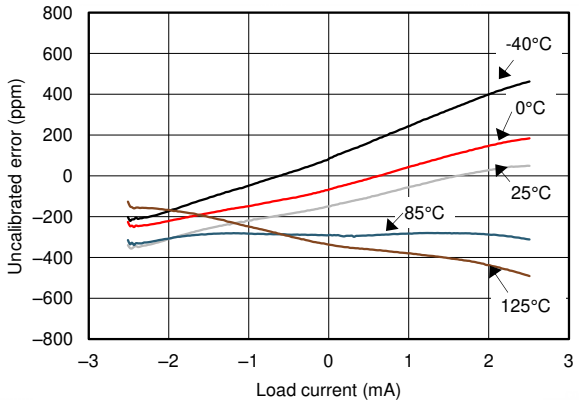


图 10-7. Uncalibrated Error vs Load Current

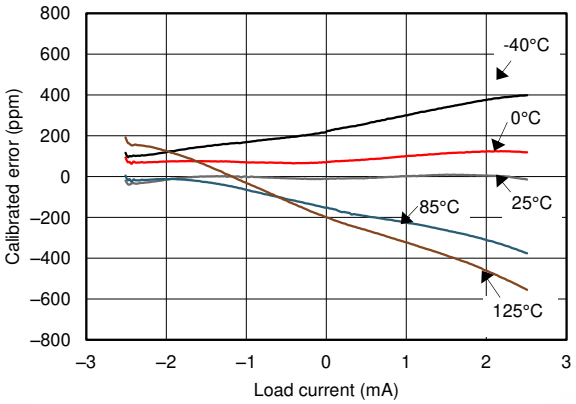


图 10-8. Calibrated Error vs Load Current

Copyright © 2022 Texas Instruments Incorporated

11 Power-Supply Recommendations

The REF20xx family of references feature an extremely low-dropout voltage. These references can be operated with a supply of only 20 mV above the output voltage. For loaded reference conditions, a typical dropout voltage versus load is shown in 图 11-1. A supply bypass capacitor ranging between 0.1 µF to 10 µF is recommended.

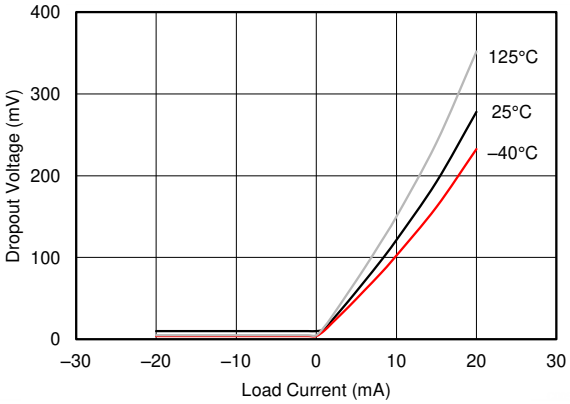


图 11-1. Dropout Voltage vs Load Current

Copyright © 2022 Texas Instruments Incorporated

12 Layout

12.1 Layout Guidelines

图 12-1 shows an example of a PCB layout for a data acquisition system using the REF2030. Some key considerations are:

- Connect low-ESR, 0.1- µ F ceramic bypass capacitors at V_{IN}, V_{REF}, and V_{BIAS} of the REF2030.
- Decouple other active devices in the system per the device specifications.
- Using a solid ground plane helps distribute heat and reduces electromagnetic interference (EMI) noise pickup.
- Place the external components as close to the device as possible. This configuration prevents parasitic errors (such as the Seebeck effect) from occurring.
- Minimize trace length between the reference and bias connections to the INA and ADC to reduce noise pickup.
- Do not run sensitive analog traces in parallel with digital traces. Avoid crossing digital and analog traces if possible, and only make perpendicular crossings when absolutely necessary.

12.2 Layout Example

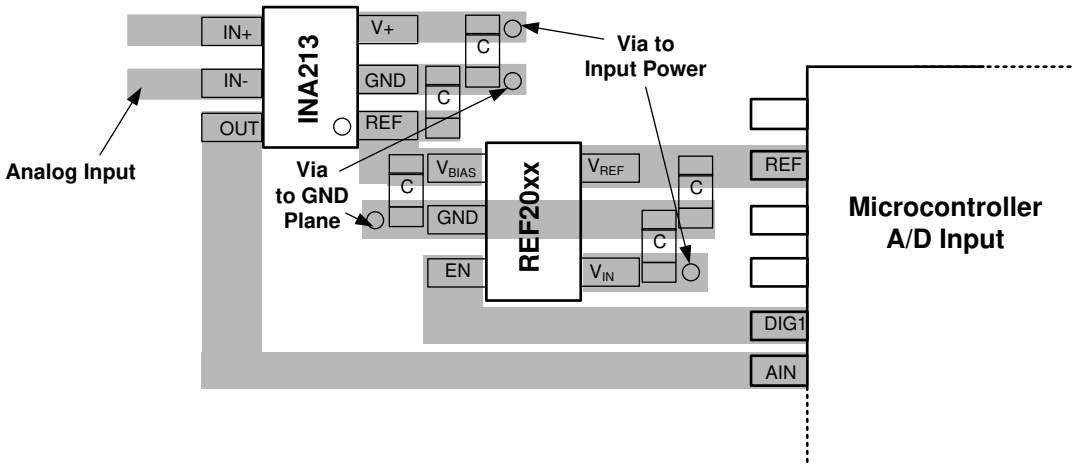


图 12-1. Layout Example

Copyright © 2022 Texas Instruments Incorporated

13 Device and Documentation Support

13.1 Documentation Support

13.1.1 Related Documentation

For related documentation see the following:

- *INA21x Voltage Output, Low- or High-Side Measurement, Bidirectional, Zero-Drift Series, Current-Shunt Monitors* (SBOS437)
- *Low-Drift Bidirectional Single-Supply Low-Side Current Sensing Reference Design* (TIDU357)

13.2 接收文档更新通知

要接收文档更新通知，请导航至 ti.com 上的器件产品文件夹。点击 *订阅更新* 进行注册，即可每周接收产品信息更改摘要。有关更改的详细信息，请查看任何已修订文档中包含的修订历史记录。

13.3 支持资源

TI E2E™ 支持论坛是工程师的重要参考资料，可直接从专家获得快速、经过验证的解答和设计帮助。搜索现有解答或提出自己的问题可获得所需的快速设计帮助。

链接的内容由各个贡献者“按原样”提供。这些内容并不构成 TI 技术规范，并且不一定反映 TI 的观点；请参阅 TI 的《使用条款》。

13.4 Trademarks

e-Trim™ is a trademark of Texas Instruments, Inc.
TI E2E™ is a trademark of Texas Instruments.
所有商标均为其各自所有者的财产。

13.5 Electrostatic Discharge Caution



This integrated circuit can be damaged by ESD. Texas Instruments recommends that all integrated circuits be handled with appropriate precautions. Failure to observe proper handling and installation procedures can cause damage.

ESD damage can range from subtle performance degradation to complete device failure. Precision integrated circuits may be more susceptible to damage because very small parametric changes could cause the device not to meet its published specifications.

13.6 术语表

TI 术语表　　本术语表列出并解释了术语、首字母缩略词和定义。

14 Mechanical, Packaging, and Orderable Information

The following pages include mechanical packaging and orderable information. This information is the most current data available for the designated devices. This data is subject to change without notice and revision of this document. For browser-based versions of this data sheet, refer to the left-hand navigation.

Copyright © 2022 Texas Instruments Incorporated

PACKAGING INFORMATION

Orderable part number	Status (1)	Material type (2)	Package | Pins	Package qty | Carrier	RoHS (3)	Lead finish/ Ball material (4)	MSL rating/ Peak reflow (5)	Op temp (°C)	Part marking (6)
REF2025AIDDCR	Active	Production	SOT-23-THIN (DDC) | 5	3000 | LARGE T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 125	GACM
REF2025AIDDCR.B	Active	Production	SOT-23-THIN (DDC) | 5	3000 | LARGE T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 125	GACM
REF2025AIDDCT	Active	Production	SOT-23-THIN (DDC) | 5	250 | SMALL T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 125	GACM
REF2025AIDDCT.B	Active	Production	SOT-23-THIN (DDC) | 5	250 | SMALL T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 125	GACM
REF2025AIDDCTG4	Active	Production	SOT-23-THIN (DDC) | 5	250 | SMALL T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 125	GACM
REF2025AIDDCTG4.B	Active	Production	SOT-23-THIN (DDC) | 5	250 | SMALL T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 125	GACM
REF2025AISDDCR	Active	Production	SOT-23-THIN (DDC) | 5	3000 | LARGE T&R	Yes	Call TI	Level-2-260C-1 YEAR	-40 to 125	1M98
REF2025AISDDCR.B	Active	Production	SOT-23-THIN (DDC) | 5	3000 | LARGE T&R	Yes	Call TI	Level-2-260C-1 YEAR	-40 to 125	1M98
REF2030AIDDCR	Active	Production	SOT-23-THIN (DDC) | 5	3000 | LARGE T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 125	GADM
REF2030AIDDCR.B	Active	Production	SOT-23-THIN (DDC) | 5	3000 | LARGE T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 125	GADM
REF2030AIDDCRG4	Active	Production	SOT-23-THIN (DDC) | 5	3000 | LARGE T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 125	GADM
REF2030AIDDCRG4.B	Active	Production	SOT-23-THIN (DDC) | 5	3000 | LARGE T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 125	GADM
REF2030AIDDCT	Active	Production	SOT-23-THIN (DDC) | 5	250 | SMALL T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 125	GADM
REF2030AIDDCT.B	Active	Production	SOT-23-THIN (DDC) | 5	250 | SMALL T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 125	GADM
REF2033AIDDCR	Active	Production	SOT-23-THIN (DDC) | 5	3000 | LARGE T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 125	GAEM
REF2033AIDDCR.B	Active	Production	SOT-23-THIN (DDC) | 5	3000 | LARGE T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 125	GAEM

Orderable part number	Status (1)	Material type (2)	Package | Pins	Package qty | Carrier	RoHS (3)	Lead finish/ Ball material (4)	MSL rating/ Peak reflow (5)	Op temp (°C)	Part marking (6)
REF2033AIDDCT	Active	Production	SOT-23-THIN (DDC) | 5	250 | SMALL T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 125	GAEM
REF2033AIDDCT.B	Active	Production	SOT-23-THIN (DDC) | 5	250 | SMALL T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 125	GAEM
REF2033AIDDCTG4	Active	Production	SOT-23-THIN (DDC) | 5	250 | SMALL T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 125	GAEM
REF2033AIDDCTG4.B	Active	Production	SOT-23-THIN (DDC) | 5	250 | SMALL T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 125	GAEM
REF2041AIDDCR	Active	Production	SOT-23-THIN (DDC) | 5	3000 | LARGE T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 125	GAFM
REF2041AIDDCR.B	Active	Production	SOT-23-THIN (DDC) | 5	3000 | LARGE T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 125	GAFM
REF2041AIDDCT	Active	Production	SOT-23-THIN (DDC) | 5	250 | SMALL T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 125	GAFM
REF2041AIDDCT.B	Active	Production	SOT-23-THIN (DDC) | 5	250 | SMALL T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 125	GAFM
REF2041AIDDCTG4	Active	Production	SOT-23-THIN (DDC) | 5	250 | SMALL T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 125	GAFM
REF2041AIDDCTG4.B	Active	Production	SOT-23-THIN (DDC) | 5	250 | SMALL T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 125	GAFM

(1) **Status:** For more details on status, see our product life cycle.

(2) **Material type:** When designated, preproduction parts are prototypes/experimental devices, and are not yet approved or released for full production. Testing and final process, including without limitation quality assurance, reliability performance testing, and/or process qualification, may not yet be complete, and this item is subject to further changes or possible discontinuation. If available for ordering, purchases will be subject to an additional waiver at checkout, and are intended for early internal evaluation purposes only. These items are sold without warranties of any kind.

(3) **RoHS values:** Yes, No, RoHS Exempt. See the TI RoHS Statement for additional information and value definition.

(4) **Lead finish/Ball material:** Parts may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

(5) **MSL rating/Peak reflow:** The moisture sensitivity level ratings and peak solder (reflow) temperatures. In the event that a part has multiple moisture sensitivity ratings, only the lowest level per JEDEC standards is shown. Refer to the shipping label for the actual reflow temperature that will be used to mount the part to the printed circuit board.

(6) **Part marking:** There may be an additional marking, which relates to the logo, the lot trace code information, or the environmental category of the part.


Multiple part markings will be inside parentheses. Only one part marking contained in parentheses and separated by a "~" will appear on a part. If a line is indented then it is a continuation of the previous line and the two combined represent the entire part marking for that device.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.


In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

TAPE AND REEL INFORMATION

REEL DIMENSIONS

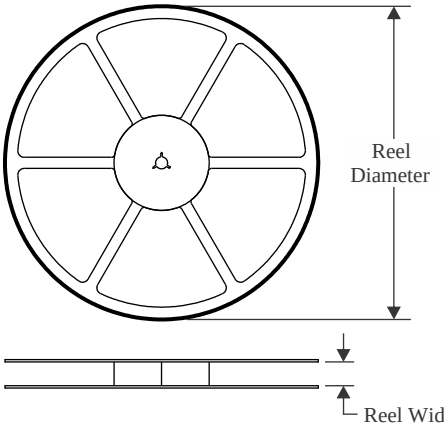


TAPE DIMENSIONS

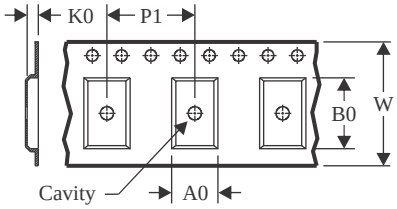

A0	Dimension designed to accommodate the component width
B0	Dimension designed to accommodate the component length
K0	Dimension designed to accommodate the component thickness
W	Overall width of the carrier tape
P1	Pitch between successive cavity centers

QUADRANT ASSIGNMENTS FOR PIN 1 ORIENTATION IN TAPE

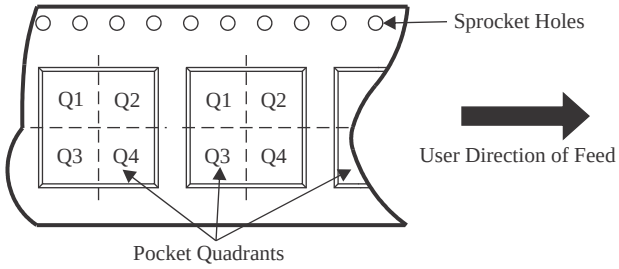


*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
REF2025AIDDCR	SOT-23-THIN	DDC	5	3000	179.0	8.4	3.2	3.2	1.4	4.0	8.0	Q3
REF2025AIDDCT	SOT-23-THIN	DDC	5	250	179.0	8.4	3.2	3.2	1.4	4.0	8.0	Q3
REF2025AIDDCTG4	SOT-23-THIN	DDC	5	250	179.0	8.4	3.2	3.2	1.4	4.0	8.0	Q3
REF2025AISDDCR	SOT-23-THIN	DDC	5	3000	180.0	8.4	3.2	3.2	1.4	4.0	8.0	Q3
REF2030AIDDCR	SOT-23-THIN	DDC	5	3000	179.0	8.4	3.2	3.2	1.4	4.0	8.0	Q3
REF2030AIDDCRG4	SOT-23-THIN	DDC	5	3000	179.0	8.4	3.2	3.2	1.4	4.0	8.0	Q3
REF2030AIDDCT	SOT-23-THIN	DDC	5	250	179.0	8.4	3.2	3.2	1.4	4.0	8.0	Q3
REF2033AIDDCR	SOT-23-THIN	DDC	5	3000	179.0	8.4	3.2	3.2	1.4	4.0	8.0	Q3
REF2033AIDDCT	SOT-23-THIN	DDC	5	250	179.0	8.4	3.2	3.2	1.4	4.0	8.0	Q3

Device	Package Type	Package Drawing	Pins	SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
REF2033AIDDCTG4	SOT-23-THIN	DDC	5	250	179.0	8.4	3.2	3.2	1.4	4.0	8.0	Q3
REF2041AIDDCR	SOT-23-THIN	DDC	5	3000	179.0	8.4	3.2	3.2	1.4	4.0	8.0	Q3
REF2041AIDDCT	SOT-23-THIN	DDC	5	250	179.0	8.4	3.2	3.2	1.4	4.0	8.0	Q3
REF2041AIDDCTG4	SOT-23-THIN	DDC	5	250	179.0	8.4	3.2	3.2	1.4	4.0	8.0	Q3

TAPE AND REEL BOX DIMENSIONS

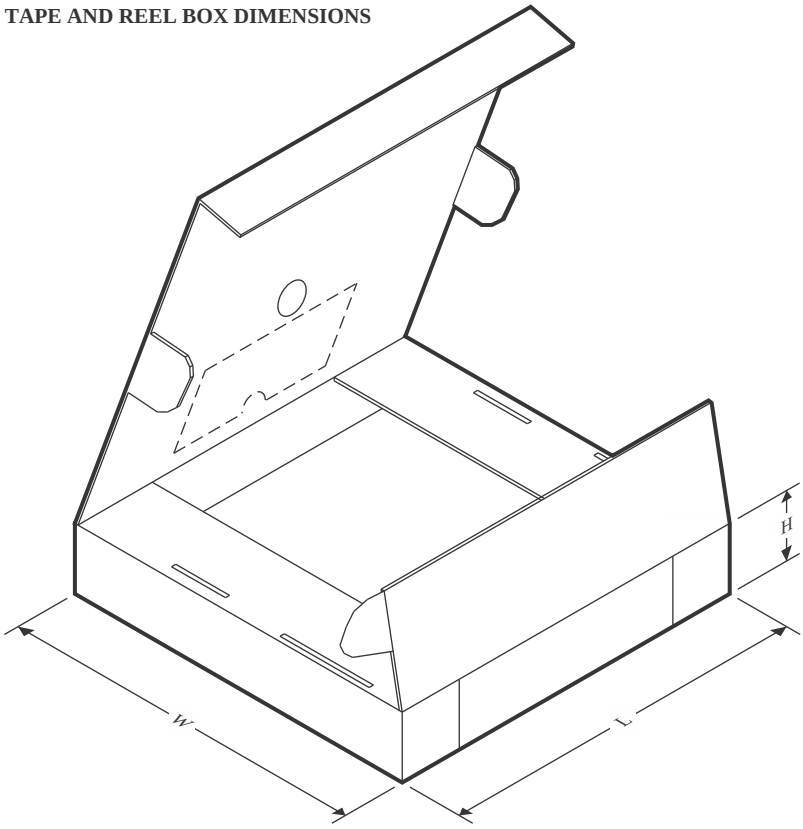

*All dimensions are nominal


Device	Package Type	Package Drawing	Pins	SPQ	Length (mm)	Width (mm)	Height (mm)
REF2025AIDDCR	SOT-23-THIN	DDC	5	3000	213.0	191.0	35.0
REF2025AIDDCT	SOT-23-THIN	DDC	5	250	213.0	191.0	35.0
REF2025AIDDCTG4	SOT-23-THIN	DDC	5	250	213.0	191.0	35.0
REF2025AISDDCR	SOT-23-THIN	DDC	5	3000	213.0	191.0	35.0
REF2030AIDDCR	SOT-23-THIN	DDC	5	3000	213.0	191.0	35.0
REF2030AIDDCRG4	SOT-23-THIN	DDC	5	3000	213.0	191.0	35.0
REF2030AIDDCT	SOT-23-THIN	DDC	5	250	213.0	191.0	35.0
REF2033AIDDCR	SOT-23-THIN	DDC	5	3000	213.0	191.0	35.0
REF2033AIDDCT	SOT-23-THIN	DDC	5	250	213.0	191.0	35.0
REF2033AIDDCTG4	SOT-23-THIN	DDC	5	250	213.0	191.0	35.0
REF2041AIDDCR	SOT-23-THIN	DDC	5	3000	213.0	191.0	35.0
REF2041AIDDCT	SOT-23-THIN	DDC	5	250	213.0	191.0	35.0
REF2041AIDDCTG4	SOT-23-THIN	DDC	5	250	213.0	191.0	35.0


PACKAGE OUTLINE

DDC0005A

SOT-23 - 1.1 max height

SMALL OUTLINE TRANSISTOR

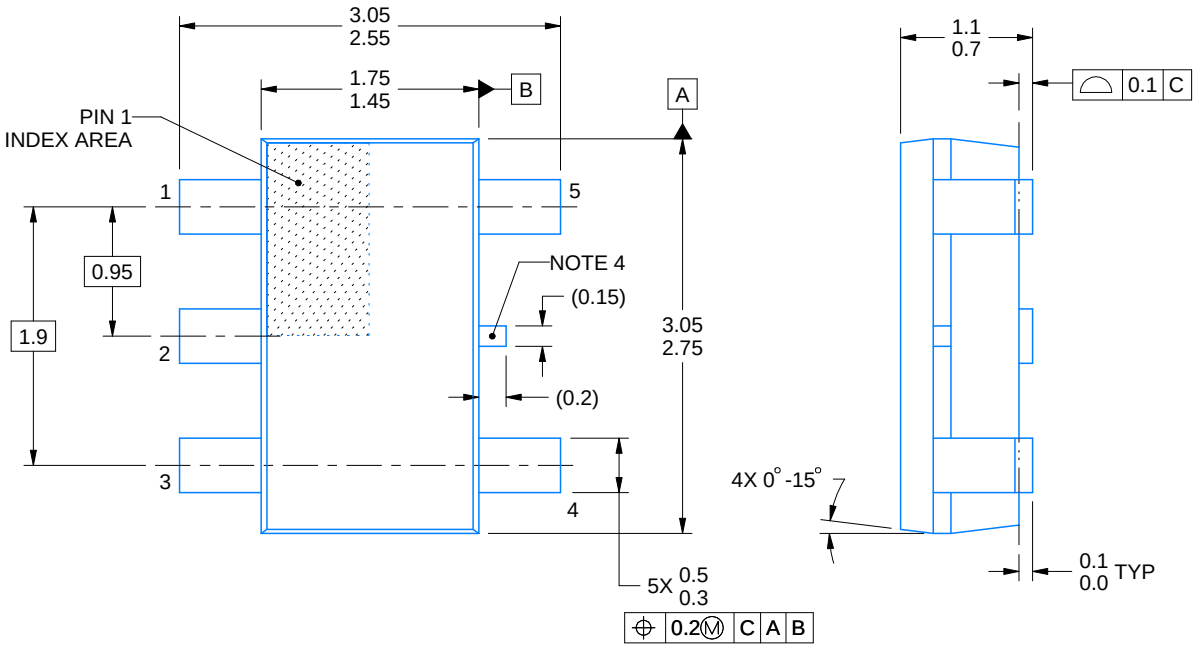


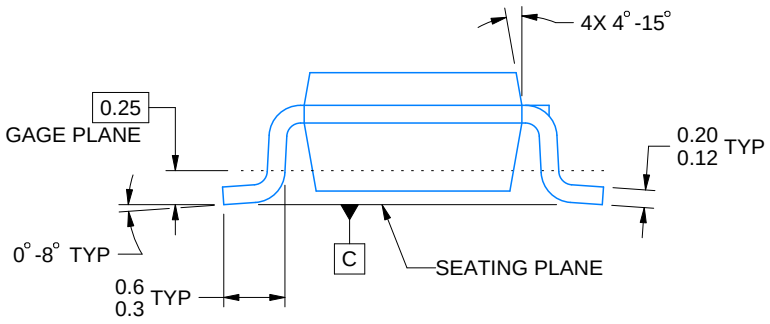


4220752/C 08/2024

NOTES:

1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. Reference JEDEC MO-193.
4. Support pin may differ or may not be present.

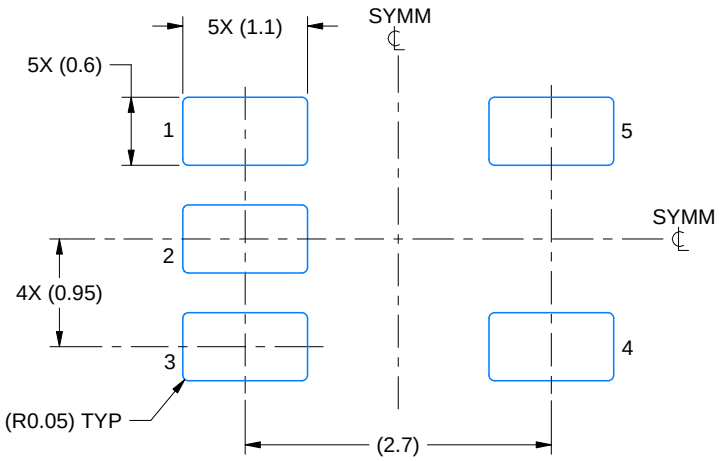

LAND PATTERN EXAMPLE
EXPLOSED METAL SHOWN
SCALE:15X

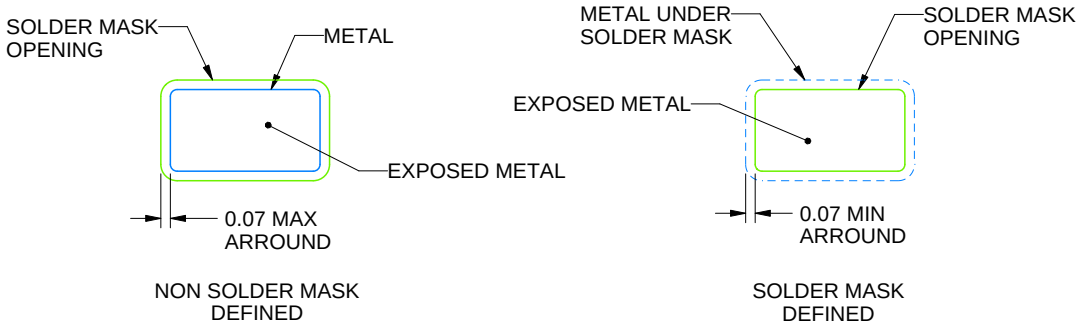


SOLDERMASK DETAILS

4220752/C 08/2024

NOTES: (continued)

4. Publication IPC-7351 may have alternate designs.
5. Solder mask tolerances between and around signal pads can vary based on board fabrication site.

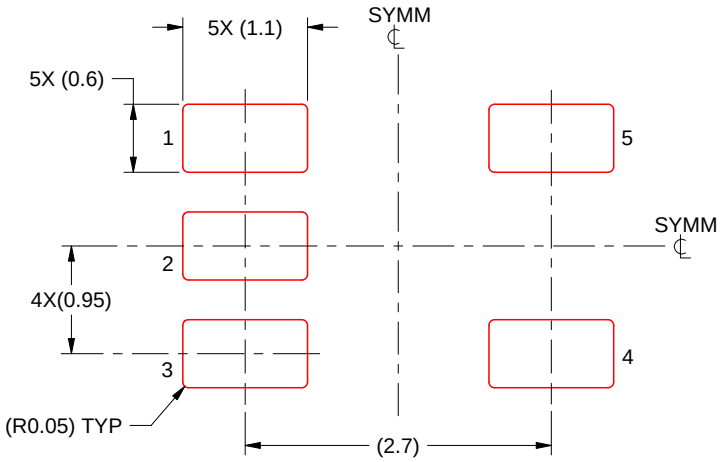

SOLDER PASTE EXAMPLE
BASED ON 0.125 THICK STENCIL
SCALE:15X

4220752/C 08/2024

NOTES: (continued)

6. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
7. Board assembly site may have different recommendations for stencil design.

重要通知和免责声明

TI“按原样”提供技术和可靠性数据（包括数据表）、设计资源（包括参考设计）、应用或其他设计建议、网络工具、安全信息和其他资源，不保证没有瑕疵且不做出任何明示或暗示的担保，包括但不限于对适销性、与某特定用途的适用性或不侵犯任何第三方知识产权的暗示担保。

这些资源可供使用 TI 产品进行设计的熟练开发人员使用。您将自行承担以下全部责任：(1) 针对您的应用选择合适的 TI 产品，(2) 设计、验证并测试您的应用，(3) 确保您的应用满足相应标准以及任何其他安全、安保法规或其他要求。

这些资源如有变更，恕不另行通知。TI 授权您仅可将这些资源用于研发本资源所述的 TI 产品的相关应用。严禁以其他方式对这些资源进行复制或展示。您无权使用任何其他 TI 知识产权或任何第三方知识产权。对于因您对这些资源的使用而对 TI 及其代表造成的任何索赔、损害、成本、损失和债务，您将全额赔偿，TI 对此概不负责。

TI 提供的产品受 TI 销售条款)、TI 通用质量指南 或 ti.com 上其他适用条款或 TI 产品随附的其他适用条款的约束。TI 提供这些资源并不会扩展或以其他方式更改 TI 针对 TI 产品发布的适用的担保或担保免责声明。 除非德州仪器 (TI) 明确将某产品指定为定制产品或客户特定产品，否则其产品均为按确定价格收入目录的标准通用器件。

TI 反对并拒绝您可能提出的任何其他或不同的条款。

版权所有 © 2025，德州仪器 (TI) 公司

最后更新日期：2025 年 10 月