RFID System

V680 Series

CSM_V680 Series_DS_E_1_17

RFID Systems with ISO/IEC 18000-3 (15693) Compliance

- High-speed communications and highly reliable communications provided with an electromagnetic induction system and unique technology.
- Antennas and RF Tags with excellent environmental resistance.
- Wide line-up of ultra-compact, long-life RF Tags, with capacities from 1 to 8 kbytes.
- Visualizes the communications status for simple analysis of the operating environment.
- Complies with FCC Rules and R&TTE Directive.

System Configuration

Connect V680 Antennas and Amplifier Units to a V680-series Controller, and read or write data from or to RF Tags.

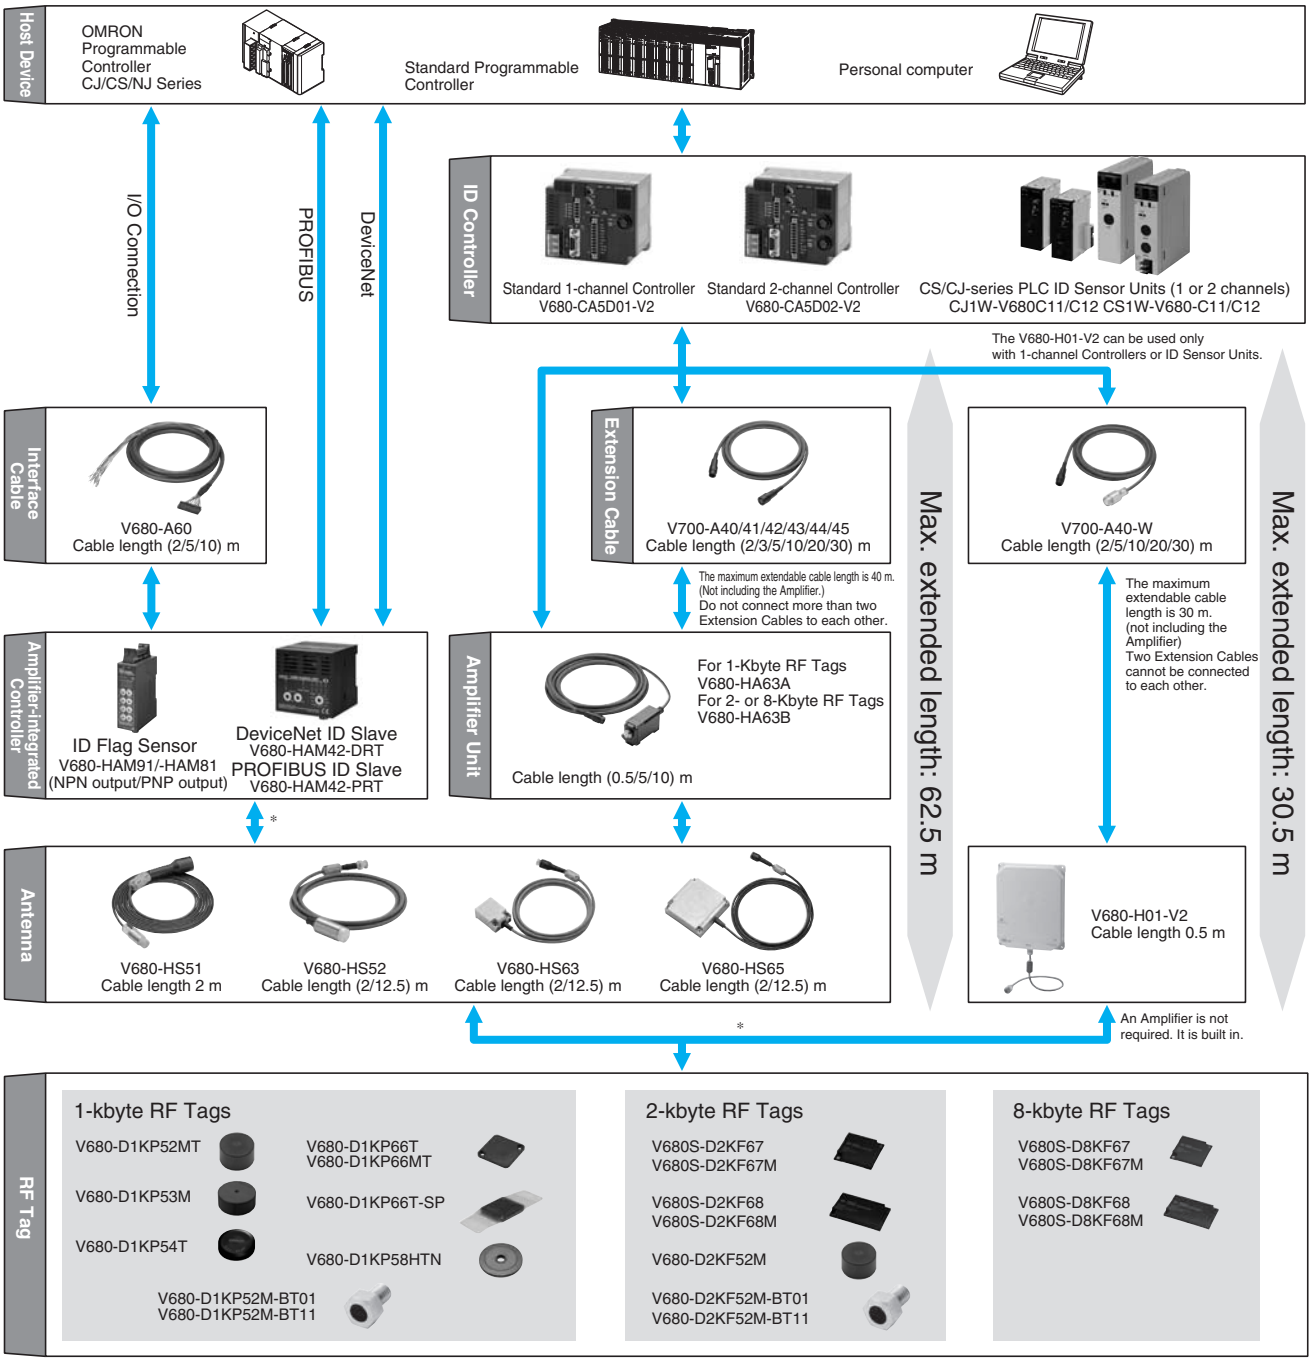

✻ For information on the combinations that can be used, refer to *Combinations of Amplifier Units, Antennas, and RF Tags* on page 3.

Handheld Type

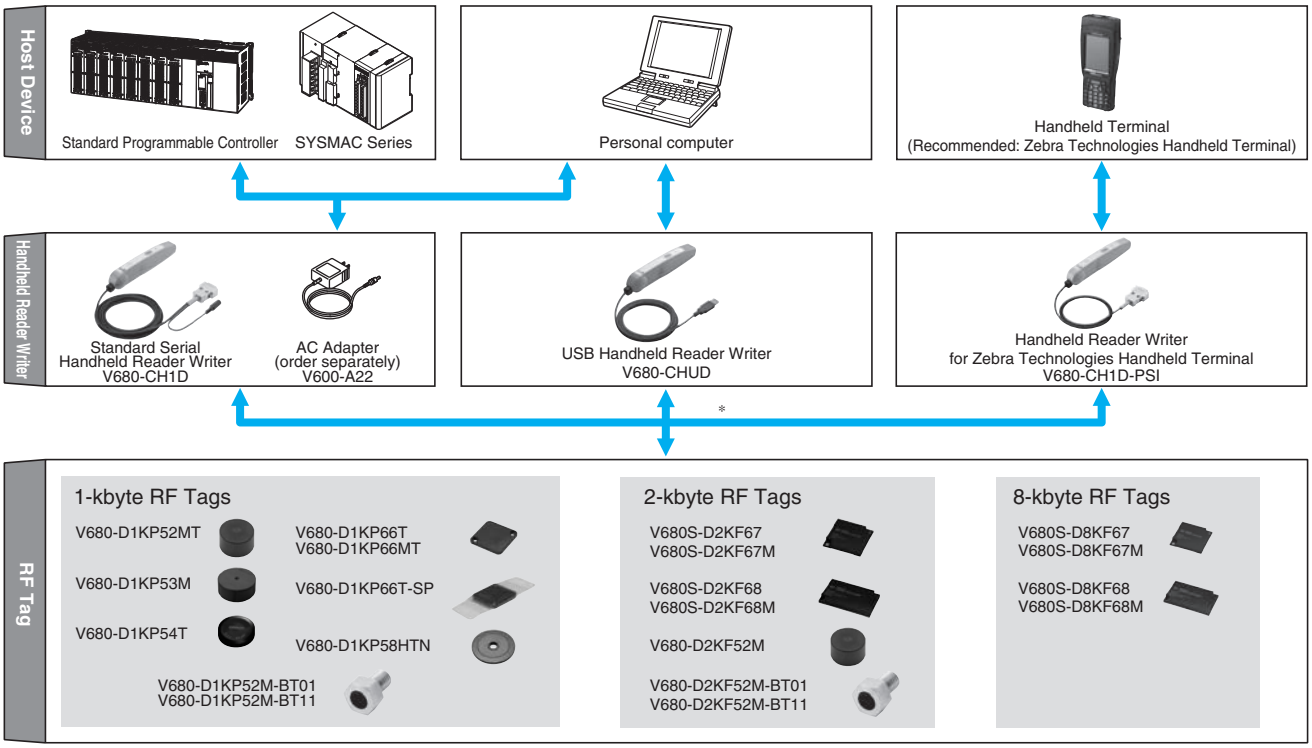

Note: Certificated as type approval of radio in 51 countries including Japan, European countries and the USA . However, some models cannot be used. Contact your OMRON sales representative for details on whether application is supported in other countries.
The latest information on the status of certification for radio wave regulations in various countries can be confirmed on the OMRON website.

✻ For information on the combinations that can be used, refer to *Combinations of Amplifier Units, Antennas, and RF Tags* on page 3.

Combinations of Amplifier Units, Antennas, and RF Tags

1-kbyte RF Tags

Amplifier Unit	Antenna	EEP-ROM 1-kbyte							
		V680-D1KP52MT	V680-D1KP53M	V680-D1KP54T	V680-D1KP66T	V680-D1KP66MT	V680-D1KP66T-SP	V680-D1KP58HTN	V680-D1KP52M-BT□1
V680-HA63A V680-HAM42-DRT V680-HAM□1	V680-HS51	Yes	Yes						Yes
	V680-HS52-□	Yes	Yes	Yes	Yes	Yes	Yes		Yes
	V680-HS63-□	Yes✻		Yes	Yes	Yes	Yes		
	V680-HS65-□			Yes	Yes	Yes	Yes	Yes	
V680-HAM42-PRT	V680-HS63-W	Yes✻			Yes	Yes	Yes		
	V680-HS65-W				Yes	Yes	Yes		
V680-H01-V2 (Antenna with Built-in Amplifier)					Yes			Yes	
V680-CH□D (Handheld Reader Writer)		Yes	Yes		Yes	Yes	Yes	Yes	

2-kbyte RF Tags

Amplifier Unit	Antenna	FRAM 2-kbyte					
		V680-D2KF52M	V680-D2KF52M-BT□1	V680S-D2KF67	V680S-D2KF67M	V680S-D2KF68	V680S-D2KF68M
V680-HA63B V680-HAM42-DRT V680-HAM□1	V680-HS51	Yes	Yes				
	V680-HS52-□	Yes	Yes	Yes	Yes		
	V680-HS63-□	Yes✻		Yes	Yes	Yes	Yes
	V680-HS65-□			Yes	Yes	Yes	Yes
V680-HAM42-PRT	V680-HS63-W			Yes	Yes	Yes	Yes
	V680-HS65-W			Yes	Yes	Yes	Yes
V680-H01-V2 (Antenna with Built-in Amplifier)				Yes		Yes	
V680-CH□D (Handheld Reader Writer)		Yes		Yes	Yes	Yes	Yes

8-kbyte RF Tags

Amplifier Unit	Antenna	FRAM 8-kbyte			
		V680S-D8KF67	V680S-D8KF67M	V680S-D8KF68	V680S-D8KF68M
V680-HA63B V680-HAM42-DRT V680-HAM□1	V680-HS51				
	V680-HS52-□	Yes	Yes		
	V680-HS63-□	Yes	Yes	Yes	Yes
	V680-HS65-□	Yes	Yes	Yes	Yes
V680-HAM42-PRT	V680-HS63-W	Yes	Yes	Yes	Yes
	V680-HS65-W	Yes	Yes	Yes	Yes
V680-H01-V2 (Antenna with Built-in Amplifier)		Yes		Yes	
V680-CH□D (Handheld Reader Writer)		Yes	Yes	Yes	Yes

Note: For details, refer to the relevant user's manual (Z248, Z249, Z262, Z271, Z272, Z278, Z279, and Z339).

✻ When using the V680-D1KP52MT or V680-D2KF52M embedded in metal, use the V680-HS51/-HS52 Antenna.
Communications will not be possible if the V680-HS63 Antenna is used.
Communications will not be possible if the V680-HS65 Antenna is used with the V680-D1KP52MT, V680-D1KP53M, or V680-D2KF52M.

Communication is also possible with RF Tags other than those of the V680 Series as long as they comply with ISO/IEC 18000-3 (ISO/IEC 15693). However, communication with RF Tags other than those of the V680 Series cannot be assured. The user must confirm communication capabilities carefully prior to use.

Ordering Information

RF Tag

Type	Memory capacity	Appearance	Size	Metallic compatibility	Model
Battery-less	1 kbyte		8 dia. × 5 mm	For embedding in metallic or non-metallic surface	**V680-D1KP52MT**
			10 dia. × 4.5 mm	For embedding in metallic or non-metallic surface	**V680-D1KP53M**
			20 dia. × 2.7 mm	For flush mounting on non-metallic surface	**V680-D1KP54T**
			34 × 34 × 3.5 mm	For flush mounting on metallic surface	**V680-D1KP66MT**
				For flush mounting on non-metallic surface	**V680-D1KP66T**
			95 × 36.5 × 6.5 mm	For flush mounting on non-metallic surface	**V680-D1KP66T-SP**
			80 dia. × t10 mm	For flush mounting on non-metallic surface	**V680-D1KP58HTN**
			M10 × 12 mm	For mounting as bolts	**V680-D1KP52M-BT01** ✻
			M8 × 12 mm		**V680-D1KP52M-BT11** ✻
	2 kbytes		8 dia. × 5 mm	For embedding in metallic or non-metallic surface	**V680-D2KF52M**
			40 × 40 × 5 mm	For flush mounting on metallic surface	**V680S-D2KF67M**
				For flush mounting on non-metallic surface	**V680S-D2KF67**
			86 × 54 × 10 mm	For flush mounting on metallic surface	**V680S-D2KF68M**
				For flush mounting on nonmetallic surface	**V680S-D2KF68**
			M10 × 12 mm	For mounting as bolts	**V680-D2KF52M-BT01** ✻
			M8 × 12 mm		**V680-D2KF52M-BT11** ✻
	8 kbytes		40 × 40 × 5 mm	For flush mounting on metallic surface	**V680S-D8KF67M**
				For flush mounting on non-metallic surface	**V680S-D8KF67**
			86 × 54 × 10 mm	For flush mounting on metallic surface	**V680S-D8KF68M**
				For flush mounting on nonmetallic surface	**V680S-D8KF68**

✻ Place orders in units of boxes (containing 20 units).

Antenna (Detachable Amplifier Unit Type)

Type		Appearance	Size	Cable length	Model
Cylindrical	Standard cable, waterproof connector		M22 × 65 mm	2 m	**V680-HS52-W 2M**
				12.5 m	**V680-HS52-W 12.5M**
	Flexible cable, nonwaterproof connector			2 m	**V680-HS52-R 2M**
				12.5 m	**V680-HS52-R 12.5M**
	Standard cable, nonwaterproof connector		M12 × 35 mm	2 m	**V680-HS51 2M**
Square	Standard cable, waterproof connector		40 × 53 × 23 mm	2 m	**V680-HS63-W 2M**
				12.5 m	**V680-HS63-W 12.5M**
	Flexible cable, nonwaterproof connector			2 m	**V680-HS63-R 2M**
				12.5 m	**V680-HS63-R 12.5M**
	Standard cable, waterproof connector		100 × 100 × 30 mm	2 m	**V680-HS65-W 2M**
				12.5 m	**V680-HS65-W 12.5M**
	Flexible cable, nonwaterproof connector			2 m	**V680-HS65-R 2M**
				12.5 m	**V680-HS65-R 12.5M**

Antenna with Built-in Amplifier

Type	Appearance	Size	Cable length	Model
Square		250 × 200 × 35 mm	0.5 m ✻	**V680-H01-V2**

✻ Use an Antenna Cable to connect the Antenna to the Controller.
The maximum cable length is 30.5 m.

Amplifier Unit

Type	Appearance	Size	Cable length	Model
For 1-kbyte memory		25 × 40 × 65 mm	0.5 m	**V680-HA63A 0.5M**
			5 m	**V680-HA63A 5M**
			10 m	**V680-HA63A 10M**
For 2-/8-kbyte memory			0.5 m	**V680-HA63B 0.5M**
			5 m	**V680-HA63B 5M**
			10 m	**V680-HA63B 10M**

ID Controller

Type	No. of connectable Amplifiers	Appearance	Size	Communication interface	Model
DC power supply	Single		105 × 90 × 65 mm	RS232C, RS422/RS485	**V680-CA5D01-V2**
	Dual				**V680-CA5D02-V2**

ID Sensor Units

Type	Appearance	Connected ID System		External power supply	No. of unit numbers used	Current consumption (A)			Model
						5 V	24 V	External	
CJ Special I/O Unit		V680 Series	1 Head	–	1 unit number	0.26	0.13 ✻	–	**CJ1W-V680C11**
			2 Heads		2 unit number	0.32	0.26	–	**CJ1W-V680C12**

Type	Appearance	Connected ID System		External power supply	No. of unit numbers used	Current consumption (A)			Model
						5 V	26 V	External	
CS Special I/O Unit		V680 Series	1 Head	–	1 unit number	0.26	0.13 ✻	–	**CS1W-V680C11**
			2 Heads	24 VDC	2 unit number	0.32	–	0.36	**CS1W-V680C12**

✻ When connected to the V680-H01: 0.28 A

Amplifier-integrated Controller (DeviceNet ID Slave/PROFIBUS ID Slave)

Appearance	Size	Network Compatibility	Model
	65 × 65 × 65 mm	DeviceNet	**V680-HAM42-DRT**
		PROFIBUS	**V680-HAM42-PRT**

Amplifier-integrated Controllers (ID Flag Sensors)

Type	Appearance	Size	Model
NPN output		90 × 30 × 65 mm	**V680-HAM91**
PNP output			**V680-HAM81**

Special Interface Cables (for V680-HAM91 and V680-HAM81)

Cable length	Model	Appearance
2 m	**V680-A60 2M**	
5 m	**V680-A60 5M**	
10 m	**V680-A60 10M**	

Note: 1. The connectors are not waterproof.
2. The cable length can be extended to a maximum of 10 m.
3. Normally two Interface Cables are required for 1 Unit. If you do not need to write to ID Tags, or use the address shift or noise check functions, then one Interface Cable is sufficient.

Handheld Reader Writers

Name	Appearance	Model
Model with standard serial connector		**V680-CH1D**
Model with USB connector and 0.8-m cable		**V680-CHUD 0.8M**
Model with USB connector and 1.9-m cable		**V680-CHUD 1.9M**
Models for Zebra Technologies Handheld Terminal		**V680-CH1D-PSI**
AC Adapter (for V680-CH1D)		**V600-A22**

Accessories (Order Separately)

RF Tag Attachment

Type	Appearance	Model
For the V680-D1KP66T		**V600-A86**
For the V680-D□KF68		**V680-A81**
To mount the V680-D1KP58HTN		**V680-A80**
For the V680-D1KP54T		**V700-A80**

Amplifier Unit Special Extension Cable (Amplifier Unit to Controller)

Cable length	Appearance	Model
2 m		**V700-A40 2M**
3 m		**V700-A41 3M**
5 m		**V700-A42 5M**
10 m		**V700-A43 10M**
20 m		**V700-A44 20M**
30 m		**V700-A45 30M**

Note: The cable can be extended up to 40 m. Up to two extension cables can be used.

V680-H01 Antenna Special Cable (Antenna to Controller)

Cable length	Appearance	Model
2 m		**V700-A40-W 2M**
5 m		**V700-A40-W 5M**
10 m		**V700-A40-W 10M**
20 m		**V700-A40-W 20M**
30 m		**V700-A40-W 30M**

Note: The cable can be extended up to 30 m. Only one extension cable can be used.

RS-232C Communications Connector

Name	Model
Connector Plug	**XM3B-0922-111**
Connector Hood	**XM2S-0911**

✻ An RS422/RS485 Communications Connector is attached to the Controller.

ID Map Manager

Type	Model
Japanese version	**V680-A-IMMJP-P02 ✻**
English version	**V680-A-IMMEG-P02 ✻**
Chinese version	**V680-A-IMMCN-P02 ✻**

✻ Supported operating system: Windows 7
For details, consult your OMRON representative.

Ratings and Performance

RF Tag (1-kbyte Memory)

Item / Model	V680-D1KP52MT	V680-D1KP54T	V680-D1KP66T	V680-D1KP66MT	V680-D1KP53M	V680-D1KP66T-SP
Memory capacity	1,000 byte (user area)					
Memory type	EEPROM					
Data retention time ✻1	10 years after writing (85°C max.)					
Write endurance	100,000 times per block (at 25°C)					
Ambient operating temperature (during communication)	–25 to 85°C (with no icing)					–25 to 70°C (with no icing)
Ambient storage temperature (during data backup)	–40 to 125°C (with no icing) Heat resistance: 1,000 thermal cycles each of 30 minutes at –10°C/150°C, High-temperature storage: 1,000 hours at 150°C ✻2 200 thermal cycles each of 30 minutes at –10°C/180°C, High-temperature storage: 200 hours at 180°C ✻3				–40 to 125°C (with no icing)	–40 to 110°C (with no icing)
Ambient operating humidity	35 to 95%					
Degree of protection	IP68 (IEC 60529:2001) Oil resistance equivalent to IP67G (JIS C 0920:2003, Appendix 1) ✻4	IP67 (IEC 60529:2001) Oil resistance equivalent to IP67G (JIS C 0920:2003, Appendix 1) ✻4	IP68 (IEC 60529:2001) Oil resistance equivalent to IP67G (JIS C 0920:2003, Appendix 1) ✻4			IP67
Vibration resistance	10 to 2,000 Hz, 1.5-mm double amplitude at 150 m/s^2 acceleration with 10 sweeps in X, Y, and Z directions for 15 minutes each					
Shock resistance	500 m/s^2 in X, Y, and Z directions 3 times each (18 times in total)					
Appearance	8 dia. × 5 mm	20 dia. × 2.7 mm	34 × 34 × 3.5 mm		10 dia. × 4.5 mm (DIN698373)	95 × 36.5 × 6.5 mm (excluding protrusions)
Materials	Case: PPS resin Filling: Epoxy resin	Molding: PPS resin			Case: PPS resin Filling: Epoxy resin	External resin: PFA Tag body: PPS resin
Weight	Approx. 0.5 g	Approx. 2 g	Approx. 6 g	Approx. 7.5 g	Approx. 1 g	Approx. 20 g
Metallic compatibility	Yes	No	No	Yes	Yes	No

Note: For details, refer to the User's Manual (Cat. No. Z262).

✻1. Refer to the User's Manual (Cat. No. Z262) for data retention time for temperatures of 85°C or higher. If the V680 has been stored at 125°C or higher, write the data again even if the data does not need to be changed.

✻2. 150°C heat resistance: The heat resistance has been checked at 150°C for up to 1,000 hours, and thermal shock has been checked through testing 1,000 thermal cycles each of 30 minutes at –10/150°C. (Test samples: 22, defects: 0)

✻3. 180°C heat resistance: The heat resistance has been checked at 180°C for up to 200 hours, and thermal shock has been checked through testing 200 thermal cycles each of 30 minutes at –10°C/180°C. (Test samples: 22, defects: 0)

✻4. Oil resistance has been tested using a specific oil as defined in the OMRON test method.

RF Tag with 1-kbyte Memory with High-temperature Capability

Item / Model	V680-D1KP58HTN
Memory capacity	1,000 bytes (user area)
Memory type	EEPROM
Data Retention	10 years after writing (85°C or less), 0.5 year after writing (85°C to 125°C) Total data retention at high temperatures exceeding 125°C is 10 hours ✻1
Write Endurance	100,000 times per block (25°C)
Ambient operating temperature	–25°C to 85°C (with no icing)
Ambient storage temperature	–40 to 250°C (with no icing) ✻2 (Data retention: -40 to 125°C) 1. 2,000 cycles of 30 minutes each between room temperature and 200°C 2. 500 hours at 250°C
Ambient storage humidity	No restrictions.
Degree of protection	IP67 (IEC 60529:2001) Oil resistance equivalent to IP67G (JIS C 0920:2003, Appendix 1) ✻3
Vibration resistance	10 to 2,000 Hz, 1.5-mm double amplitude, acceleration: 150 m/s^2, 10 sweeps each in X, Y, and Z directions for 15 minutes each
Shock resistance	500 m/s^2, 3 times each in X, Y, and Z directions (total: 18 times)
Materials	PPS resin
Weight	Approx. 70 g

✻1 After storing data at high temperatures, rewrite the data even if changes are not required. High temperatures are those exceeding 125°C up to 250°C.

✻2 Storing RF Tags under high temperatures or under heat cycles will adversely affect the performance of the internal parts and the service life of the RF Tags. The RF Tag were placed in the following high temperatures and then evaluated in-house. It was confirmed that no problems occurred.
1. 2,000 cycles of 30 minutes each between room temperature and 200°C.
2. 500 hours at 250°C.

✻3 Oil resistance has been tested using a specific oil as defined in the OMRON test method.

RF Tag (2-kbyte Memory)

Item / Model	V680S-D2KF67	V680S-D2KF67M	V680S-D2KF68	V680S-D2KF68M	V680-D2KF52M
Memory capacity	2,000 bytes (user area)				
Memory type	FRAM				
Data retention time ✻1	10 years after writing at 85°C				10 years after writing (55°C max.)
Write endurance	One trillion writes for each block(85°C or less), Number of accesses ✻2: One trillion writes				Access frequency per block ✻2: 10 billion times
Ambient operating temperature	–20 to 85°C (with no icing)				–25 to 85°C (with no icing)
Ambient storage temperature	–40 to 125°C (with no icing)				–40 to 85°C (with no icing)
Ambient operating humidity	35 to 85%				35 to 95%
Degree of protection	IP68 (IEC 60529:2001), Oil resistance equivalent to IP67G (JIS C 0920:2003, Appendix 1) ✻3 IPX9K (DIN 40 050)				IP67 (IEC 60529:2001) Oil resistance equivalent to IP67G (JIS C 0920:2003, Appendix 1) ✻3
Vibration resistance	10 to 2,000 Hz, 1.5-mm double amplitude at 150 m/s^2 acceleration with 10 sweeps in X, Y, and Z directions for 15 minutes each		No abnormality after application of 10 to 500 Hz, 1.5-mm double amplitude, acceleration: 100 m/s^2, 10 sweeps each in X, Y, and Z directions for 11 minutes each		10 to 2,000 Hz, 1.5-mm double amplitude at 150 m/s^2 acceleration with 10 sweeps in X, Y, and Z directions for 15 minutes each
Shock resistance	500 m/s^2 in X, Y, and Z directions 3 times each (Total:18 times)				
Appearance	40 × 40 × 5 mm		86 × 54 × 10 mm		8 dia. × 5 mm
Materials	Exterior: PPS resin				Case: PPS resin Filling: Epoxy resin
Weight	Approx. 12 g	Approx. 11.5 g	Approx. 44 g	Approx. 46 g	Approx. 0.5 g
Metallic compatibility	No	Yes	No	Yes	Yes

Note: For details, refer to the User's Manual (Cat. No. Z248 or Z339).
✻1. Refer to the User's Manual (Cat. No. Z248) for data retention time for temperatures of 55°C or higher.
✻2. The total Read or Write communication frequency is called the access frequency.
✻3. Oil resistance has been tested using a specific oil as defined in the OMRON test method.

RF Tag with 8-kbyte Memory

Item / Model	V680S-D8KF67	V680S-D8KF67M	V680S-D8KF68	V680S-D32KF68M
Memory capacity	8,192 bytes (user area)			
Memory type	FRAM			
Data retention time	10 years after writing (85°C or less)			
Write endurance	1 trillion times per block. ✻1 Access frequency : 1 trillion times:			
Ambient operating temperature	–20 to 85°C (with no icing)			
Ambient storage temperature	–40 to 125°C (with no icing)			
Ambient operating humidity	35 to 85%			
Degree of protection	IP68 (IEC 60529:2001), Oil resistance equivalent to IP67G (JIS C 0920:2003, Appendix 1) ✻2 IPX9K (DIN 40 050)			
Vibration resistance	10 to 2,000 Hz, 1.5-mm double amplitude at 150 m/s^2 acceleration with 10 sweeps in X, Y, and Z directions for 15 minutes each		10 to 500 Hz, 1.5-mm double amplitude at 100 m/s^2 acceleration with 10 sweeps in X, Y, and Z directions for 11 minutes each	
Shock resistance	500 m/s^2 in X, Y, and Z directions 3 times each (18 times in total)			
Dimensions	40 × 40 × 4.5 mm		86 × 54 × 10 mm	
Materials	Molding: PPS resin			
Weight	Approx. 11.5 g	Approx. 12 g	Approx. 44 g	Approx. 46 g
Metallic compatibility	No	Yes	No	Yes

Note: For details, refer to the User's Manual (Cat. No. Z339).
✻1. The total Read or Write communication frequency is called the access frequency.
✻2. Oil resistance has been tested using a specific oil as defined in the OMRON test method.

Bolt RF Tags (1-kbyte Memory)

Item / Model	V680-D1KP52M-BT01	V680-D1KP52M-BT11
Memory capacity	1,000 bytes (user area)	
Memory type	EEPROM	
Data retention time	10 years after writing (85°C or less), 0.5 years after writing (85 to 125°C) Total data retention at high temperatures exceeding 125°C is 10 houres	
Write endurance	100,000 times per block (at 25°C)	
Ambient operating temperature (during communication)	–25 to 85°C (with no icing)	
Ambient storage temperature (during data backup)	–40 to 125°C (with no icing)	
Ambient operating humidity	35 to 95%	
Degree of protection	IP68 (IEC 60529:2001) Oil resistance equivalent to IP67G (JIS C 0920:2003, Appendix 1) ✻	
Vibration resistance	10 to 2,000 Hz, 1.5-mm double amplitude at 150 m/s^2 acceleration with 10 sweeps in X, Y, and Z directions for 15 minutes each	
Shock resistance	500 m/s^2 in X, Y, and Z directions 3 times each (18 times in total)	
Materials	Bolt: SUS303, Case (RF Tag): PPS resin, Filling (RF Tag): Epoxy resin	
Weight	Approx. 25 g	Approx. 10 g

✻ Oil resistance has been tested using a specific oil as defined in the OMRON test method.

Bolt RF Tags (2-kbyte Memory)

Item / Model	V680-D2KF52M-BT01	V680-D2KF52M-BT11
Memory capacity	2,000 bytes (user area)	
Memory type	FRAM	
Data retention time	10 years after writing (55°C or less), 2.9 years after writing (85°C max.)	
Write endurance	10 billion reads/writes per block, Number of accesses ✻1: 10 billion times	
Ambient operating temperature (during communication)	–25°C to 85°C (with no icing)	
Ambient storage temperature (during data backup)	–40°C to 85°C (with no icing)	
Ambient operating humidity	35 to 95%	
Degree of protection	IP67 (IEC 60529:2001) Oil resistance equivalent to IP67G (JIS C 0920:2003, Appendix 1) ✻2	
Vibration resistance	10 to 2,000 Hz, 1.5-mm double amplitude at 150 m/s^2 acceleration with 10 sweeps in X, Y, and Z directions for 15 minutes each	
Shock resistance	500 m/s^2 in X, Y, and Z directions 3 times each (18 times in total)	
Materials	Bolt: SUS303, Case (RF Tag): PPS resin, Filling (RF Tag): Epoxy resin	
Weight	Approx. 25 g	Approx. 10 g

✻1 The number of accesses is the total number of communications for reading or writing.
✻2 Oil resistance has been tested using a specific oil as defined in the OMRON test method.

Cylindrical Antenna (Detachable Amplifier Unit Type)

Item / Model	V680-HS51 (Standard Cable, Non-waterproof Connector)	V680-HS52-W (Standard Cable, Waterproof Connector)	V680-HS52-R (Standard Cable, Non-waterproof Connector)
Ambient operating temperature	−10°C to 60°C (with no icing)		
Ambient storage temperature	−25°C to 75°C (with no icing)		
Ambient operating humidity	35% to 95% (with no condensation)		
Insulation resistance	20 MΩ min. (at 500 VDC) between the cable terminals and the case		
Dielectric strength	1,000 VAC (50/60 Hz) for 1 minute between the cable terminals and the case with a current leakage of 5 mA max.		
Degree of protection	IP67 (IEC 60529:2001) Oil resistance equivalent to IP67G (JIS C 0920:2003, Appendix 1) (Antenna portion) ✻2	IP67 (IEC 60529:2001) Oil resistance equivalent to IP67G (JIS C 0920:2003, Appendix 1) (Antenna portion) ✻1	IP67 (IEC 60529:2001) Oil resistance equivalent to IP67G (JIS C 0920:2003, Appendix 1) (Antenna portion) ✻2
Vibration resistance	10 to 2,000 Hz variable vibration, 1.5-mm double amplitude at 150 m/s² acceleration, with 10 sweeps in X, Y, and Z directions for 15 minutes each	10 to 500 Hz variable vibration, 1.5-mm double amplitude at 100 m/s² acceleration, with 10 sweeps in X, Y, and Z directions for 8 minutes each	
Shock resistance	1,000 m/s² in X, Y, and Z directions 3 times each (18 times in total)	500 m/s² in X, Y, and Z directions 3 times each (18 times in total)	
Appearance	M12 × 35 mm	M22 × 65 mm	
Materials	ABS, brass, epoxy resin filling		
Weight	Approx. 55 g (with 2-m cable)	Approx. 850 g (with 12.5-m cable)	

Note: For details, refer to the User's Manual (Cat. No. Z248 or Z262).
✻1. The degree of protection for the Connector is IP67/IP65. This OMRON in-house standard confirms resistance to cutting and other oils. It is equivalent to the former JEM1030 standard.
✻2. The Connector is not waterproof. Oil resistance has been tested using a specific oil as defined in the OMRON test method.

Square Antenna (Detachable Amplifier Unit Type)

Item / Model	V680-HS63-W (Standard Cable, Waterproof Connector)	V680-HS63-R (Flexible Cable, Non-waterproof Connector)
Ambient operating temperature	−10°C to 60°C (with no icing)	
Ambient storage temperature	−25°C to 75°C (with no icing)	
Ambient operating humidity	35% to 95% (with no condensation)	
Insulation resistance	20 MΩ min. (at 500 VDC) between the cable terminals and the case	
Dielectric strength	1,000 VAC (50/60 Hz) for 1 minute between the cable terminals and the case with a current leakage of 5 mA max.	
Degree of protection	IP67 (IEC 60529:2001) Oil resistance equivalent to IP67G (JIS C 0920:2003, Appendix 1) (Antenna portion) ✻1	IP67 (IEC 60529:2001) Oil resistance equivalent to IP67G (JIS C 0920:2003, Appendix 1) (Antenna portion) ✻2
Vibration resistance	10 to 500 Hz variable vibration, 1.5-mm double amplitude at 100 m/s² acceleration, with 10 sweeps in X, Y, and Z directions for 11 minutes each	
Shock resistance	500 m/s² in X, Y, and Z directions 3 times each (18 times in total)	
Appearance	40 × 53 × 23 mm	
Materials	ABS, epoxy resin filling	
Weight	Approx. 850 g (with 12.5-m cable)	

Item / Model	V680-HS65-W (Standard Cable, Waterproof Connector)	V680-HS65-R (Flexible Cable, Non-waterproof Connector)
Ambient operating temperature	−25°C to 70°C (with no icing)	
Ambient storage temperature	−40°C to 85°C (with no icing)	
Ambient operating humidity	35% to 95% (with no condensation)	
Insulation resistance	20 MΩ min. (at 500 VDC) between the cable terminals and the case	
Dielectric strength	1,000 VAC (50/60 Hz) for 1 minute between the cable terminals and the case with a current leakage of 5 mA max.	
Degree of protection	IP67 (IEC 60529:2001) Oil resistance equivalent to IP67G (JIS C 0920:2003, Appendix 1) (Antenna portion) ✻1	IP67 (IEC 60529:2001) Oil resistance equivalent to IP67G (JIS C 0920:2003, Appendix 1) (Antenna portion) ✻2
Vibration resistance	10 to 500 Hz variable vibration, 1.5-mm double amplitude at 100 m/s² acceleration, with 10 sweeps in X, Y, and Z directions for 11 minutes each	
Shock resistance	500 m/s² in X, Y, and Z directions 3 times each (18 times in total)	
Appearance	100 × 100 × 30 mm	
Materials	ABS, epoxy resin filling	
Weight	Approx. 1,100 g (with 12.5-m cable)	

Note: For details, refer to the User's Manual (Cat. No. Z248 or Z262).
✻1. The degree of protection for the Connector is IP67/IP65. Oil resistance has been tested using a specific oil as defined in the OMRON test method.
✻2. The Connector is not waterproof. Oil resistance has been tested using a specific oil as defined in the OMRON test method.

Square Antenna with Built-in Amplifier

Item / Model	V680-H01-V2
Ambient operating temperature	–10°C to 55°C (with no icing)
Ambient storage temperature	–35°C to 65°C (with no icing)
Ambient operating humidity	35% to 85% (with no condensation)
Insulation resistance	20 MΩ min. (at 100 VDC) between connector terminals and the rear plate
Dielectric strength	1,000 VAC, 50/60 Hz for 1 min between connector terminals and the rear plate
Degree of protection	IP63.(IEC60529); Mounting direction: Communications surface facing up
Vibration resistance	10 to 150 Hz, 0.35-mm single amplitude, acceleration: 50 m/s^2, 10 sweeps in each of 3 axis directions (up/down, left/right, and forward/backward) for 8 minutes each
Shock resistance	150 m/s^2, 3 times each in 6 directions (Total: 18 times)
Appearance	200 × 250 × 40 mm
Material	Polycarbonate (PC) resin, ASA resin / Rear Panel: Aluminum
Weight	Approx. 900 g
Cable length	0.5 m (use a relay cable to connect to the Controller up to 30.5 m)

Note: For details, refer to the User's Manual (Cat. No. Z248 or Z262).

Amplifier Unit

Item / Model	V680-HA63A	V680-HA63B
Ambient operating temperature	–10°C to 55°C (with no icing)	
Ambient storage temperature	–25°C to 65°C (with no icing)	
Ambient operating humidity	35% to 85% (with no condensation)	
Insulation resistance	20 MΩ min. (at 500 VDC) between the cable terminals and the case	
Dielectric strength	1,000 VAC (50/60 Hz) for 1 minute between the cable terminals and the case with a current leakage of 5 mA max.	
Degree of protection	IP40 (IEC60529) ✻1	IP67/IP65 (IEC60529) ✻2
Vibration resistance	10 to 500 Hz variable vibration, 1.5-mm double amplitude at 100 m/s^2 acceleration, with 10 sweeps in X, Y, and Z directions for 11 minutes each	
Shock resistance	500 m/s^2 in X, Y, and Z directions 3 times each (18 times in total)	
Appearance	25 × 40 × 65mm (not including projections)	
Material	Polycarbonate (PC) resin	
Weight	Approx. 650 g (with 10-m cable)	
Cable length	5 m, 10 m	
Transmittable RF Tags	1-kbyte memory	2-, 8-kbyte memory

Note: For details, refer to the User's Manual (Cat. No. Z248 or Z262).
✻1. When connected to the V680-HS□□-R or V680-HS52-R.
✻2. When connected to the V680-HS□□-W or V680-HS52-W. (Not including the Connector on the Controller.)

ID Controller

Item / Model	V680-CA5D01-V2	V680-CA5D02-V2
Power supply voltage (Power consumption)	24 VDC (–15% to +10%) 15 W max., 0.8 A max.	
Communications Specifications	RS-232C, RS-422, RS-485	
Input Specifications (Input voltage) RST, TRG1, and TRG2	24 VDC (+10% to –15%, including ripple) (PNP and NPN compatible)	
Output Specifications (Maximum switching capacity) RUN, BUSY/OUT3, ERROR/OUT4, OUT1, and OUT2	24 VDC (+10% to –15%, including ripple) PNP and NPN compatible	
Ambient operating temperature	–10 to 55°C (with no icing)	
Ambient storage temperature	–25 to 65°C (with no icing)	
Ambient operating humidity	25% to 85% (with no condensation)	
Insulation resistance	20 MΩ min. (at 500 VDC) applied as follows: (1) Between power supply terminals and grounded case (2) Between ground and terminals	
Dielectric strength	1,000 VAC (50/60 Hz) for 1 minute (1) Between power supply terminals and grounded case (2) Between ground and terminals	
Degree of protection	Panel mounted (equivalent to IP20)	
Vibration resistance	10 to 150 Hz variable vibration, 0.2-mm double amplitude at 15 m/s^2 acceleration, with 10 sweeps in X, Y, and Z directions for 8 minutes each	
Shock resistance	150 m/s^2	
Appearance	105 × 90 × 65 mm (not including projections)	
Material	Polycarbonate (PC) resin, ABS resin	
Weight	Approx. 300 g	
Connectable Amplifier Units	1	2

Note: For details, refer to the User's Manual (Cat. No. Z249).

USB Port

The USB port is used for a simple connection with a personal computer using a USB cable. The port complies with USB 1.1, and the USB cable uses a series A or series mini-B connector. A USB port driver must be separately provided. Consult with your OMRON representative for details.
When connected to a host device via USB, the communications will use 1:1 protocol regardless of the setting of DIP switches 3 to 9.
The USB port is not used for control purposes. When building a system, be sure to provide an RS-232C port or RS-422/RS-485C port.

ID Sensor Units

Item	Model	CJ1W-V680C11	CJ1W-V680C12	CS1W-V680C11	CS1W-V680C12
Current consumption	Internal: 5 V	260 mA	320 mA	260 mA	320 mA
	Internal: 24 V/26 V	130 mA ✻	260 mA	125 mA ✻	–
	External: 24 V	–	–	–	360 mA
Ambient operating temperature		0 to 55°C			
Ambient storage temperature		–20°C to 75°C			
Ambient operating humidity		10% to 90% (with no condensation)			
Insulation resistance		20 mΩ min. at 500 VDC			
Dielectric strength		1,000 VAC for 1 minute			
Degree of protection		Mounted in panel (IP30)			
Vibration resistance		10 to 57 Hz variable vibration, 0.075-mm double amplitude and 57 to 150 Hz variable vibration at 9.8 m/s^2 acceleration, with 10 sweeps in X, Y, and Z directions for 8 minutes each			
Shock resistance		147 m/s^2 in X, Y, and Z directions 3 times each			
Appearance		31 × 65 × 90 mm (excluding protrusions)		35 × 130 × 101 mm (excluding protrusions)	

✻ When connected to the V680-H01: 280 mA. The V680-H01-V2 can be connected only to a 1-channel ID Sensor Unit. A 2-channel Unit cannot be used.

Functional Specifications of ID Sensor Units

Item / Model	CJ1W-V680C11	CJ1W-V680C12	CS1W-V680C11	CS1W-V680C12
Communications control protocol	Special protocol for CS, CJ and NJ PLCs			
Number of Antenna connections	1	2	1	2
Commands	Supported commands: Read, Write, Bit Set/Bit Clear, Mask Bit Write, Calculation Write, Data Fill, Data Check, Number of Writes Control, Copy (CJ1W-V680C12 and CS1W-V680C12 only), Read with Error Correction/Write with Error Correction, UID Read, and Noise Measurement. The following communications options are supported: Single trigger, Single auto, Repeat auto, FIFO trigger, FIFO repeat ✻, Multi-access trigger, and Multi-access repeat ✻			
Data transfer quantity	2,048 bytes max. (160 bytes/scan)			
Diagnostic function	(1) CPU watchdog timer (2) Communications error detection with RF Tag (3) Antenna power supply error			
Monitoring/testing functions	Tag communications can be tested in Test Mode. Status is displayed by LED indicators.			
Number of allocated words	10 words	20 words	10 words	20 words

Note: For details, refer to the User's Manual (Cat. No. Z271).

✻ Cannot be used for communications with the V680-D1KP□□.

Amplifier-integrated Controller (DeviceNet ID Slave/PROFIBUS ID Slave)

Item / Model	V680-HAM42-DRT	V680-HAM42-PRT
Network compatibility	DeviceNet	PROFIBUS DP-V0
Connectable Antennas	One channel (V680-HS□□)	
Rated voltage	24 VDC (–15% to 10%) including 10% ripple (p-p)	
Power consumption	4 W max. (Current consumption of 200 mA max. at power supply voltage of 24 VDC)	
Ambient operating temperature	–10 to 55°C (with no icing)	
Ambient storage temperature	–25 to 65°C (with no icing)	
Ambient operating humidity	25% to 85% (with no condensation; ambient operating temperature is 40°C max. at humidity of 85%)	
Insulation resistance	20 MΩ min. (at 500 VDC) between all terminals excluding the ground terminal and the case	
Dielectric strength	1,000 VAC (50/60 Hz) for 1 minute between all terminals excluding the ground terminal and the case	
Vibration resistance	10 to 150 Hz, 0.2-mm double amplitude at 15 m/s^2 acceleration with 10 sweeps in X, Y and Z directions for 8 minutes each	
Shock resistance	150 m/s^2 in X, Y, and Z directions 3 times each (18 times in total)	
Appearance	65 × 65 × 65 mm (excluding protrusions)	
Degree of protection	IEC 60529, IP20	
Materials	Polycarbonate (PC) resin, ABS resin	
Weight	Approx. 150 g	
Mounting	DIN Track	

Note: 1. For details, refer to the *User's Manual* (Cat. No. Z278).
2. The number of words allocated in the master depends on the Access Mode.

Amplifier-integrated Controllers (ID Flag Sensors)

Item / Model	V680-HAM91	V680-HAM81
Rated voltage	24 VDC (–15% to +10%) including 10% ripple (p-p)	
Power consumption	3.5 W (24 VDC, 150 mA max. except external I/O line current)	
Input specifications	Transistor output Short-circuit current: 3 mA (typical) (for short-circuit between IN terminal and 0 V), OFF voltage: 15 to 30 VDC, ON voltage: 0 to 5 VDC, Input impedance: 8.2 kΩ, Applied voltage: 30 VDC max.	
Output specifications	NPN open-collector output 30 VDC, 20 mA max., Residual voltage: 2 V max.	PNP open-collector output 30 VDC, 20 mA max., Residual voltage: 2 V max.
Ambient operating temperature	–10 to 55°C (with no icing)	
Ambient storage temperature	–25 to 65°C (with no icing)	
Ambient operating humidity	25% to 85% (with no condensation; ambient operating temperature is 40°C max. at humidity of 85%)	
Insulation resistance	20 MΩ min. (at 500 VDC) between all terminals excluding the FG terminal and the case	
Dielectric strength	1,000 VAC (50/60 Hz) applied for 1 minute between all terminals excluding the FG terminal and the case	
Vibration resistance	10 to 150 Hz, 0.2-mm double amplitude at 15 m/s^2 acceleration with 10 sweeps in X, Y and Z directions for 8 minutes each	
Shock resistance	150 m/s^2 in X, Y, and Z directions 3 times each (18 times in total)	
Appearance	90 × 30 × 65 mm (excluding protrusions)	
Degree of protection	IEC 60529, IP40	
Materials	Polycarbonate (PC) resin, ABS resin	
Weight	Approx. 130 g	
Mounting	DIN Track	

Note: 1. For details, refer to the *User's Manual* (Cat. No. Z279).
2. The connectors are not water resistant. If there is a possibility that water will be splashed onto the ID Sensor Unit, mount it inside of a control box. Also, be sure to use the V680 as a set with the V680-A60 Interface Cable (sold separately).

Handheld Reader Writers

Item / Model	V680-CHUD 0.8M	V680-CHUD 1.9M	V680-CH1D	V680-CH1D-PSI
Power supply voltage	5 VDC ± 5% (at the connector section of the product)			
Current consumption	500 mA max. (for a power supply voltage of 5.0 V)			
Communications specifications	USB (Series A plug) Ver.1.1		RS-232C (D-SUB 9-pin) compatible with IBM PC/AT)	RS-232C (D-SUB 9-pin)
Ambient operating temperature during communication	0 to +40°C			
Ambient storage temperature	–25 to +65°C			
Ambient operating humidity during communication	35% to 85% (with no condensation)			
Insulation resistance	50 MΩ min. (at 500 VDC) between connector and case			
Dielectric strength	1,000 VAC, 50/60 Hz for 1 min (leakage current: 1 mA max.) between connectors and case			
Degree of protection	IEC 60529: IP63 ✻			
Vibration resistance	Destruction: 10 to 150 Hz variable vibration, 0.2-mm double amplitude and 15 m/s^2 acceleration with 10 sweeps for 8 min each in 6 directions			
Shock resistance	Destruction: 150 m/s^2, 3 times each in X, Y, and Z directions			
Weight	Approx. 110 g (including connector and cable)	Approx. 140 g (including connector and cable)	Approx. 170 g (including connector and cable)	Approx. 120 g (including connector and cable)
Cable length	0.8 m	1.9 m	2.5 m	0.8 m

Note: Refer to the User's Manual (Cat. No. Z272) for details.
Contact your OMRON sales representative for details on drivers for Windows.

✻ This does not include the connector section. The main unit is not resistant to chemical or oils.

AC Adapter (for V680-CH1D)

Item / Model	V600-A22
Input voltage	100 to 120 VAC at 50/60 Hz
Input current	AC: 300 mA (at load current of 2.0 A)
Output voltage	DC5V ± 0.25V
Ambient operating temperature	0 to +40°C
Ambient storage temperature	–20 to +85°C (with no icing)
Ambient operating humidity	5% to 95% (with no condensation)
Insulation resistance	100 MΩ min. (at 500 VDC) between input terminals and output terminals
Dielectric strength	2,000 V for 1 minute between input terminals and output terminals with a current leakage of 10 mA max.
Weight	Approx. 70 g
Applicable standards	UL

Communication Specifications

ID Controllers (V680-CA5D01-V2/V680-CA5D02-V2)

RF Tag (1-kbyte Memory) Communication

Recommended combination		Function	Communication range (unit: mm)	RF Tag and Antenna mounting conditions
RF Tag	**Antenna**			
V680-D1KP52MT	**V680-HS51**	Read distance	0.5 to 6.5 (axis offset ±2)	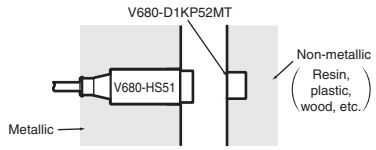
		Write distance	0.5 to 6.0 (axis offset ±2)	
	V680-HS52	Read distance	0 to 9.0 (axis offset ±2)	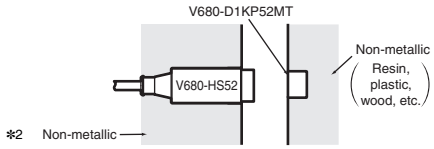
		Write distance	0 to 8.5 (axis offset ±2)	
	V680-HS63	Read distance	0 to 12.0 (axis offset ±2)	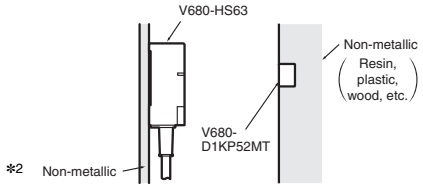
		Write distance	0 to 9.5 (axis offset ±2)	
V680-D1KP52MT (embedded in metallic surface: steel)	**V680-HS51**	Read distance	0.5 to 3.5 ✻1 (axis offset ±2)	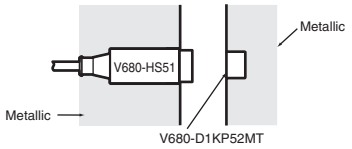
		Write distance	0.5 to 3.0 ✻1 (axis offset ±2)	
	V680-HS52	Read distance	0 to 4.5 ✻1 (axis offset ±2)	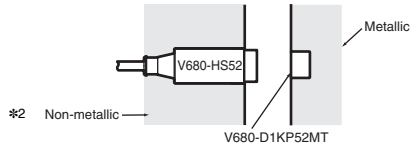
		Write distance	0 to 4.0 ✻1 (axis offset ±2)	
V680-D1KP53M	**V680-HS51**	Read distance	0.5 to 6.5 (axis offset ±2)	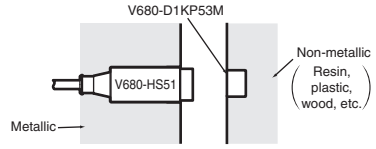
		Write distance	0.5 to 6.0 (axis offset ±2)	
	V680-HS52	Read distance	0 to 9.0 (axis offset ±2)	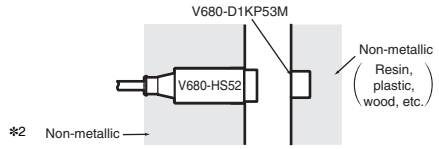
		Write distance	0 to 8.5 (axis offset ±2)	
V680-D1KP53M (embedded in metallic surface : steel)	**V680-HS51**	Read distance	0.5 to 3.5 ✻1 (axis offset ±2)	
		Write distance	0.5 to 3.0 ✻1 (axis offset ±2)	
	V680-HS52	Read distance	0 to 4.5 ✻1 (axis offset ±2)	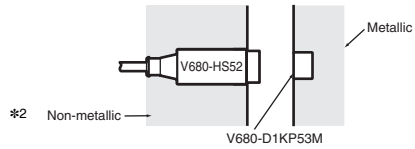
		Write distance	0 to 4.0 ✻1 (axis offset ±2)	

✻1. When using the V680-D1KP52MT/-D1KP53M embedded in metal, use the V680-HS51/-HS52 Antenna. Communications will not be possible with a V680-HS63 Antenna.

✻2. The Antenna can be mounted in metal, but the communications distance will decrease compared to mounting in nonmetal. Confirm performance using the actual devices before actual operation.

Recommended combination		Function	Communication range (unit: mm)	RF Tag and Antenna mounting conditions
RF Tag	Antenna			
V680-D1KP54T	**V680-HS52**	Read distance	0 to 17.0 ✻1 (axis offset ±2)	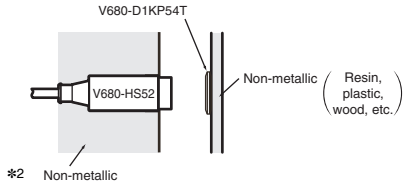
		Write distance	0 to 15.0 ✻1 (axis offset ±2)	
	V680-HS63	Read distance	0 to 24.0 ✻1 (axis offset ±10)	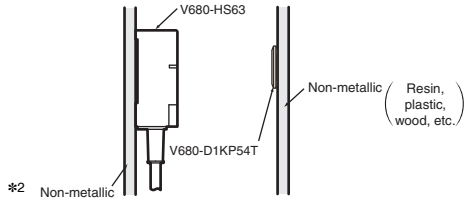
		Write distance	0 to 20.0 ✻1 (axis offset ±10)	
	V680-HS65	Read distance	0 to 33.0 ✻1 (axis offset ±10)	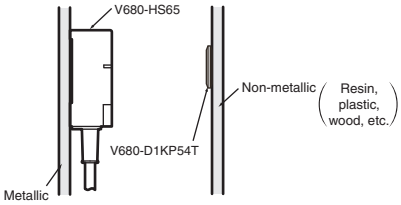
		Write distance	0 to 28.0 ✻1 (axis offset ±10)	
V680-D1KP66T	**V680-HS52**	Read distance	0 to 17.0 ✻1 (axis offset ±2)	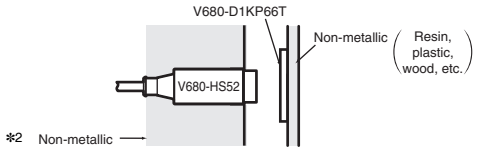
		Write distance	0 to 17.0 ✻1 (axis offset ±2)	
	V680-HS63	Read distance	0 to 30.0 ✻1 (axis offset ±10)	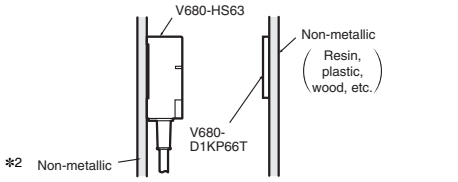
		Write distance	0 to 25.0 ✻1 (axis offset ±10)	
	V680-HS65	Read distance	0 to 47.0 ✻1 (axis offset ±10)	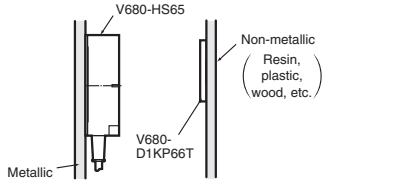
		Write distance	0 to 42.0 ✻1 (axis offset ±10)	
	V680-H01-V2	Read distance	0 to 100.0 ✻1 (axis offset ±2)	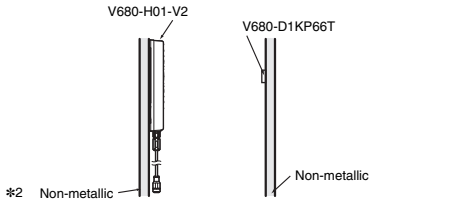
		Write distance	0 to 100.0 ✻1 (axis offset ±2)	

Note: When mounting the V680-HS65, be sure to attach the Mounting Brackets at the base of the Antenna.
The enclosed Mounting Brackets do not need to be used, however, if the mounting brackets on the Antenna are metal plates and their dimensions are larger than the dimensions of the Antenna (100 × 100 mm).
For details, refer to the User's Manual (Cat. No. Z248 or Z262).

✻1. The communication range may be reduced if the V680-D1KP66T/-D1KP54T is mounted onto a metallic surface. Refer to the User's Manual (Cat. No. Z262) for details.

✻2. The Antenna can be mounted in metal, but the communication range will decrease compared to mounting in nonmetal.
Confirm performance using the actual devices before actual operation.

Recommended combination		Function	Communication range (unit: mm)	RF Tag and Antenna mounting conditions
RF Tag	**Antenna**			
V680-D1KP66MT (flush-mounted on metallic surface: steel)	**V680-HS52**	Read distance	0 to 16.0 (axis offset ±2)	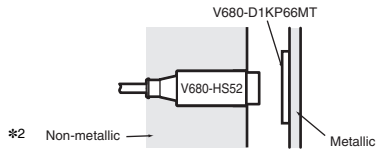
		Write distance	0 to 14.0 (axis offset ±2)	
	V680-HS63	Read distance	0 to 25.0 (axis offset ±10)	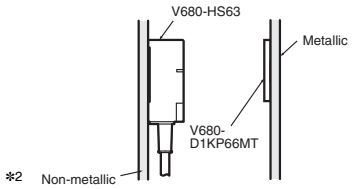
		Write distance	0 to 20.0 (axis offset ±10)	
	V680-HS65	Read distance	0 to 25.0 (axis offset ±10)	
		Write distance	0 to 20.0 (axis offset ±10)	
V680-D1KP66T-SP	**V680-HS52**	Read distance	0 to 15.0 ✻1 (axis offset ±2)	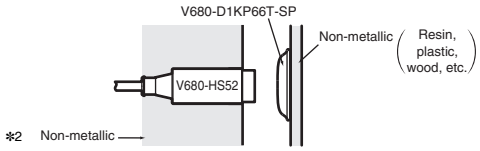
		Write distance	0 to 15.0 ✻1 (axis offset ±2)	
	V680-HS63	Read distance	0 to 25.0 ✻1 (axis offset ±10)	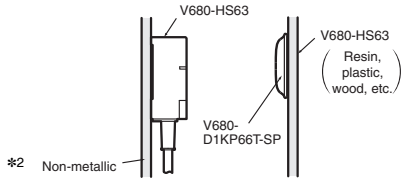
		Write distance	0 to 20.0 ✻1 (axis offset ±10)	
	V680-HS65	Read distance	0 to 42.0 ✻1 (axis offset ±10)	
		Write distance	0 to 37.0 ✻1 (axis offset ±10)	

Note: When mounting the V680-HS65, be sure to attach the Mounting Brackets at the base of the Antenna.
The enclosed Mounting Brackets do not need to be used, however, if the mounting brackets on the Antenna are metal plates and their dimensions are larger than the dimensions of the Antenna (100 × 100 mm).
For details, refer to the User's Manual (Cat. No. Z248 or Z262).

✻1. The communication range may be reduced if the V680-D1KP66T-SP is mounted onto a metallic surface. Refer to the User's Manual (Cat. No. Z262) for details.

✻2. The Antenna can be mounted in metal, but the communications distance will decrease compared to mounting in nonmetal.
Confirm performance using the actual devices before actual operation.

High-temperature RF Tag (1-kbyte Memory) Communication

Recommended combination		Function	Communication range (unit: mm)	RF Tag and Antenna mounting conditions
RF Tag	**Antenna**			
V680-D1KP58HTN	**V680-HS65**	Read distance	0 to 55 (axis offset ±10)	
		Write distance	0 to 55 (axis offset ±10)	
	V680-H01-V2	Read distance	0 to 150.0 (axis offset ±10)	
		Write distance	0 to 150.0 (axis offset ±10)	

RF Tag (2-kbyte Memory) Communication

Recommended combination		Function	Communication range (unit: mm)	RF Tag and Antenna mounting conditions
RF Tag	**Antenna**			
V680S-D2KF67	**V680-HS52**	Read distance	0 to 17.0 ✻1 (axis offset ±2)	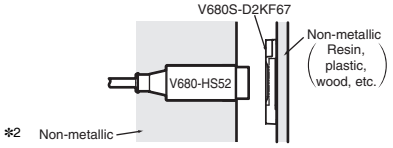
		Write distance	0 to 17.0 ✻1 (axis offset ±2)	
	V680-HS63	Read distance	7.0 to 30.0 ✻1 (axis offset ±10)	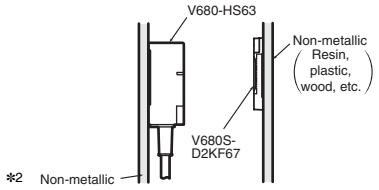
		Write distance	7.0 to 30.0 ✻1 (axis offset ±10)	
	V680-HS65	Read distance	0 to 42.0 ✻1 (axis offset ±10)	
		Write distance	0 to 42.0 ✻1 (axis offset ±10)	
	V680-H01-V2	Read distance	0 to 100.0 ✻1 (axis offset ±10)	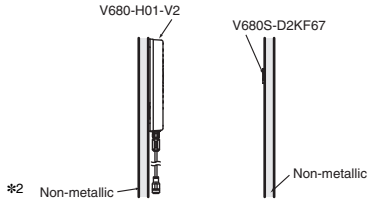
		Write distance	0 to 100.0 ✻1 (axis offset ±10)	
V680S-D2KF67M (flush-mounted on metallic surface: steel)	**V680-HS52**	Read distance	0 to 16.0 (axis offset ±2)	
		Write distance	0 to 16.0 (axis offset ±2)	
	V680-HS63	Read distance	6.0 to 25.0 (axis offset ±10)	
		Write distance	6.0 to 25.0 (axis offset ±10)	
	V680-HS65	Read distance	0 to 25.0 (axis offset ±10)	
		Write distance	0 to 25.0 (axis offset ±10)	

Note: When mounting the V680-HS65, be sure to attach the Mounting Brackets at the base of the Antenna.
The enclosed Mounting Brackets do not need to be used, however, if the mounting brackets on the Antenna are metal plates and their dimensions are larger than the dimensions of the Antenna (100 × 100 mm).
For details, refer to the User's Manual (Cat. No. Z248 or Z262).

✻1. The communication range may be reduced if the V680S-D2KF67 is mounted onto a metallic surface. Refer to the User's Manual (Cat. No. Z248) for details.

✻2. The Antenna can be mounted in metal, but the communications distance will decrease compared to mounting in nonmetal.
Confirm performance using the actual devices before actual operation.

Recommended combination		Function	Communication range (unit: mm)	RF Tag and Antenna mounting conditions
RF Tag	Antenna			
V680S-D2KF68	**V680-HS63**	Read distance	0 to 45.0 (axis offset ±10)	
		Write distance	0 to 45.0 (axis offset ±10)	
	V680-HS65	Read distance	0 to 75.0 (axis offset ±10)	
		Write distance	0 to 75.0 (axis offset ±10)	
	V680-H01-V2	Read distance	0 to 150.0 (axis offset ±10)	
		Write distance	0 to 150.0 (axis offset ±10)	
V680S-D2KF68M	**V680-HS63**	Read distance	0 to 35.0 (axis offset ±10)	
		Write distance	0 to 35.0 (axis offset ±10)	
	V680-HS65	Read distance	0 to 55.0 (axis offset ±10)	
		Write distance	0 to 55.0 (axis offset ±10)	
V680-D2KF52M	**V680-HS51**	Read distance	0.5 to 5.5 (axis offset ±2)	
		Write distance	0.5 to 5.5 (axis offset ±2)	
	V680-HS52	Read distance	0 to 8.0 (axis offset ±2)	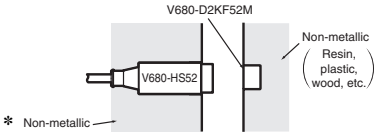
		Write distance	0 to 8.0 (axis offset ±2)	
	V680-HS63	Read distance	0 to 9.5 (axis offset ±2)	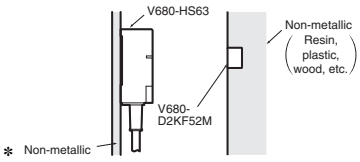
		Write distance	0 to 9.5 (axis offset ±2)	
V680-D2KF52M (embedded in metallic surface: steel)	**V680-HS51**	Read distance	0 to 3.5 (axis offset ±2)	
		Write distance	0 to 3.5 (axis offset ±2)	
	V680-HS52	Read distance	0 to 3.0 (axis offset ±2)	
		Write distance	0 to 3.0 (axis offset ±2)	

Note: When mounting the V680-HS65, be sure to attach the Mounting Brackets at the base of the Antenna.
The enclosed Mounting Brackets do not need to be used, however, if the mounting brackets on the Antenna are metal plates and their dimensions are larger than the dimensions of the Antenna (100 × 100 mm).
For details, refer to the User's Manual (Cat. No. Z248 or Z262).

* The Antenna can be mounted in metal, but the communications distance will decrease compared to mounting in nonmetal.
Confirm performance using the actual devices before actual operation.

RF Tag (8-kbyte Memory) Communication

Recommended combination		Function	Communication range (unit: mm)	RF Tag and Antenna mounting conditions
RF Tag	Reader Writer			
V680S-D8KF67	**V680-HS52**	Read distance	0 to 17.0 (axis offset ±2)	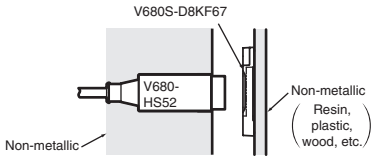
		Write distance	0 to 17.0 (axis offset ±2)	
	V680-HS63	Read distance	7.0 to 30.0 (axis offset ±10)	
		Write distance	7.0 to 30.0 (axis offset ±10)	
	V680-HS65	Read distance	0 to 42.0 (axis offset ±10)	
		Write distance	0 to 42.0 (axis offset ±10)	
	V680-H01-V2	Read distance	0 to 100.0 (axis offset ±10)	
		Write distance	0 to 100.0 (axis offset ±10)	
V680S-D8KF67M	**V680-HS52**	Read distance	0 to 16.0 (axis offset ±2)	
		Write distance	0 to 16.0 (axis offset ±2)	
	V680-HS63	Read distance	6.0 to 25.0 (axis offset ±10)	
		Write distance	6.0 to 25.0 (axis offset ±10)	
	V680-HS65	Read distance	0 to 25.0 (axis offset ±10)	
		Write distance	0 to 25.0 (axis offset ±10)	

Note: When mounting the V680-HS65, be sure to attach the Mounting Brackets at the base of the Antenna.
The enclosed Mounting Brackets do not need to be used, however, if the mounting brackets on the Antenna are metal plates and their dimensions are larger than the dimensions of the Antenna (100 × 100 mm).
For details, refer to the User's Manual (Cat. No. Z248 or Z262).

Recommended combination		Function	Communication range (unit: mm)	RF Tag and Antenna mounting conditions
RF Tag	Reader Writer			
V680S-D8KF68	**V680-HS63**	Read distance	0 to 45.0 (axis offset ±10)	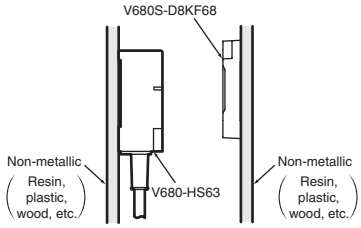
		Write distance	0 to 45.0 (axis offset ±10)	
	V680-HS65	Read distance	0 to 75.0 (axis offset ±10)	
		Write distance	0 to 75.0 (axis offset ±10)	
	V680-H01-V2	Read distance	0 to 150.0 (axis offset ±10)	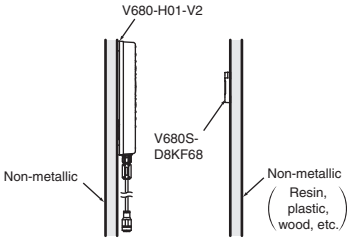
		Write distance	0 to 150.0 (axis offset ±10)	
V680S-D8KF68M	**V680-HS63**	Read distance	0 to 35.0 (axis offset ±10)	
		Write distance	0 to 35.0 (axis offset ±10)	
	V680-HS65	Read distance	0 to 55.0 (axis offset ±10)	
		Write distance	0 to 55.0 (axis offset ±10)	

Note: When mounting the V680-HS65, be sure to attach the Mounting Brackets at the base of the Antenna.
The enclosed Mounting Brackets do not need to be used, however, if the mounting brackets on the Antenna are metal plates and their dimensions are larger than the dimensions of the Antenna (100 × 100 mm).
For details, refer to the User's Manual (Cat. No. Z248 or Z262).

Bolt RF Tag (1-kbyte or 2-kbyte Memory) Communication

Recommended combination		Function	Communication range (unit: mm)	RF Tag and Antenna mounting conditions
RF Tag	Antenna			
V680-D1KP52M-BT01/-BT11	**V680-HS51**	Read distance	0.5 to 2.5 (axis offset ±2)	
		Write distance	0.5 to 2.0 (axis offset ±2)	
	V680-HS52	Read distance	0.5 to 3.0 (axis offset ±2)	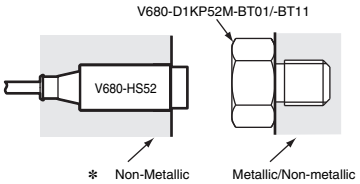
		Write distance	0.5 to 2.5 (axis offset ±2)	
V680-D2KF52M-BT01/-BT11	**V680-HS51**	Read distance	0.5 to 2.5 (axis offset ±2)	
		Write distance	0.5 to 2.5 (axis offset ±2)	
	V680-HS52	Read distance	0.5 to 2.0 (axis offset ±2)	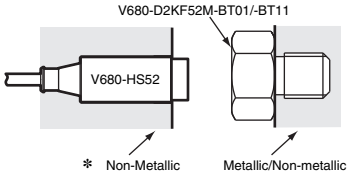
		Write distance	0.5 to 2.0 (axis offset ±2)	

✻ Mounting can be performed in metal, but the communications distance will decrease compared to mounting in nonmetal.
Confirm performance using the actual devices before actual operation.

DeviceNet ID Slave (V680-HAM42-DRT)
PROFIBUS ID Slave (V680-HAM42-PRT)
ID Flag Sensors (V680-HAM91/-HAM81)
RF Tag (1-kbyte Memory) Communication

Recommended combination		Function	Communication range (unit: mm)	RF Tag and Antenna mounting conditions
RF Tag	Antenna			
V680-D1KP52MT	**V680-HS51**	Read distance	0.5 to 6.5 (axis offset ±2)	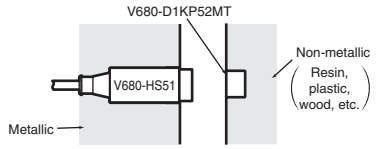
		Write distance	0.5 to 6.0 (axis offset ±2)	
	V680-HS52	Read distance	0.5 to 9.0 (axis offset ±2)	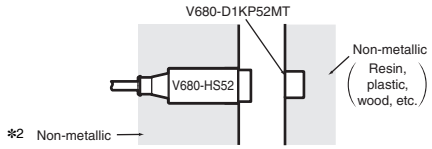
		Write distance	0.5 to 8.5 (axis offset ±2)	
	V680-HS63	Read distance	0.5 to 12.0 (axis offset ±2)	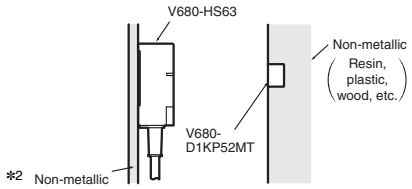
		Write distance	0.5 to 9.5 (axis offset ±2)	
V680-D1KP52MT (embedded in metallic surface: steel)	**V680-HS51**	Read distance	0.5 to 3.5 (axis offset ±2)	
		Write distance	0.5 to 3.0 (axis offset ±2)	
	V680-HS52	Read distance	0.5 to 4.5 (axis offset ±2)	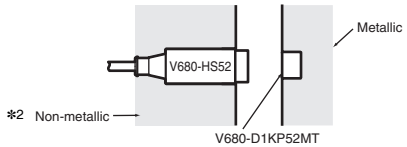
		Write distance	0.5 to 4.0 (axis offset ±2)	
V680-D1KP53M	**V680-HS51**	Read distance	0.5 to 6.5 (axis offset ±2)	
		Write distance	0.5 to 6.0 (axis offset ±2)	
	V680-HS52	Read distance	0.5 to 9.0 (axis offset ±2)	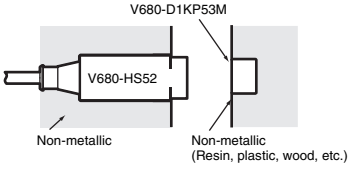
		Write distance	0.5 to 8.5 (axis offset ±2)	
V680-D1KP53M (embedded in metallic surface : steel)	**V680-HS51**	Read distance	0.5 to 3.5 (axis offset ±2)	
		Write distance	0.5 to 3.0 (axis offset ±2)	
	V680-HS52	Read distance	0.5 to 4.5 (axis offset ±2)	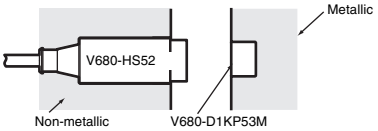
		Write distance	0.5 to 4.0 (axis offset ±2)	

Recommended combination		Function	Communication range (unit: mm)	RF Tag and Antenna mounting conditions
RF Tag	**Antenna**			
V680-D1KP66T	**V680-HS52**	Read distance	1.0 to 17.0 ✻1 (axis offset ±2)	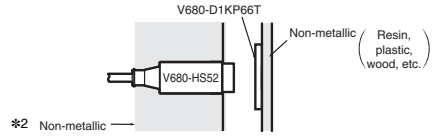
		Write distance	1.0 to 17.0 ✻1 (axis offset ±2)	
	V680-HS63	Read distance	5.0 to 30.0 ✻1 (axis offset ±10)	
		Write distance	5.0 to 25.0 ✻1 (axis offset ±10)	
	V680-HS65	Read distance	5.0 to 47.0 ✻1 (axis offset ±10)	
		Write distance	5.0 to 42.0 ✻1 (axis offset ±10)	

Note: When mounting the V680-HS65, be sure to attach the Mounting Brackets at the base of the Antenna.
The enclosed Mounting Brackets do not need to be used, however, if the mounting brackets on the Antenna are metal plates and their dimensions are larger than the dimensions of the Antenna (100 × 100 mm).
For details, refer to the User's Manual (Cat. No. Z278 or Z279).

✻1. The communication range may be reduced if the V680-D1KP66T is mounted onto a metallic surface. Refer to the User's Manual (Cat. No. Z278 or Z279) for details.
✻2. The Antenna can be mounted in metal, but the communications distance will decrease compared to mounting in nonmetal.

Recommended combination		Function	Communication range (unit: mm)	RF Tag and Antenna mounting conditions
RF Tag	**Antenna**			
V680-D1KP66MT (flush-mounted on metallic surface: steel)	**V680-HS52**	Read distance	1.0 to 16.0 (axis offset ±2)	
		Write distance	1.0 to 14.0 (axis offset ±2)	
	V680-HS63	Read distance	5.0 to 25.0 (axis offset ±2)	
		Write distance	5.0 to 20.0 (axis offset ±2)	
	V680-HS65	Read distance	5.0 to 25.0 (axis offset ±10)	
		Write distance	5.0 to 20.0 (axis offset ±10)	
V680-D1KP66T-SP	**V680-HS52**	Read distance	1.0 to 15.0 ✻1 (axis offset ±2)	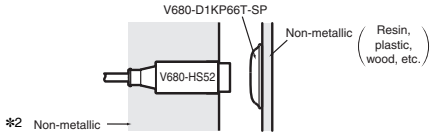
		Write distance	1.0 to 15.0 ✻1 (axis offset ±2)	
	V680-HS63	Read distance	5.0 to 25.0 ✻1 (axis offset ±10)	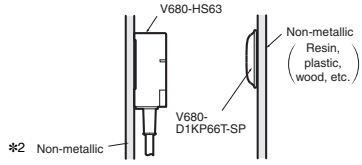
		Write distance	5.0 to 20.0 ✻1 (axis offset ±10)	
	V680-HS65	Read distance	5.0 to 42.0 ✻1 (axis offset ±10)	
		Write distance	5.0 to 37.0 ✻1 (axis offset ±10)	

Note: When mounting the V680-HS65, be sure to attach the Mounting Brackets at the base of the Antenna.
The enclosed Mounting Brackets do not need to be used, however, if the mounting brackets on the Antenna are metal plates and their dimensions are larger than the dimensions of the Antenna (100 × 100 mm).
For details, refer to the User's Manual (Cat. No. Z278 or Z279).

✻1. The communication range may be reduced if the V680-D1KP66T-SP is mounted onto a metallic surface. Refer to the User's Manual (Cat. No. Z278 or Z279) for details.
✻2. The Antenna can be mounted in metal, but the communications distance will decrease compared to mounting in nonmetal.
Confirm performance using the actual devices before actual operation.

RF Tag (2-kbyte Memory) Communication

Recommended combination		Function	Communication range (unit: mm)	RF Tag and Antenna mounting conditions
RF Tag	**Antenna**			
V680S-D2KF67	**V680-HS52**	Read distance	1.0 to 17.0 ✻1 (axis offset ±2)	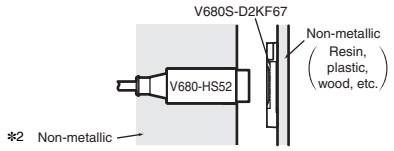
		Write distance	1.0 to 17.0 ✻1 (axis offset ±2)	
	V680-HS63	Read distance	7.0 to 30.0 ✻1 (axis offset ±10)	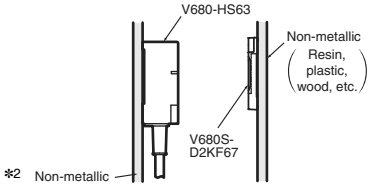
		Write distance	7.0 to 30.0 ✻1 (axis offset ±10)	
	V680-HS65	Read distance	5.0 to 42.0 ✻1 (axis offset ±10)	
		Write distance	5.0 to 42.0 ✻1 (axis offset ±10)	
V680S-D2KF67M (flush-mounted on metallic surface: steel)	**V680-HS52**	Read distance	1.0 to 16.0 (axis offset ±2)	
		Write distance	1.0 to 16.0 (axis offset ±2)	
	V680-HS63	Read distance	6.0 to 25.0 (axis offset ±10)	
		Write distance	6.0 to 25.0 (axis offset ±10)	
	V680-HS65	Read distance	5.0 to 25.0 (axis offset ±10)	
		Write distance	5.0 to 25.0 (axis offset ±10)	
V680S-D2KF68	**V680-HS63**	Read distance	5.0 to 45.0 (axis offset ±10)	
		Write distance	5.0 to 45.0 (axis offset ±10)	
	V680-HS65	Read distance	5.0 to 75.0 (axis offset ±10)	
		Write distance	5.0 to 75.0 (axis offset ±10)	

Note: When mounting the V680-HS65, be sure to attach the Mounting Brackets at the base of the Antenna.
The enclosed Mounting Brackets do not need to be used, however, if the mounting brackets on the Antenna are metal plates and their dimensions are larger than the dimensions of the Antenna (100 × 100 mm).
For details, refer to the User's Manual (Cat. No. Z278 or Z279).

✻1. The communication range may be reduced if the V680S-D2KF67 is mounted onto a metallic surface. Refer to the User's Manual (Cat. No. Z278 or Z279) for details.

✻2. The Antenna can be mounted in metal, but the communications distance will decrease compared to mounting in nonmetal.
Confirm performance using the actual devices before actual operation.

Recommended combination		Function	Communication range (unit: mm)	RF Tag and Antenna mounting conditions
RF Tag	Antenna			
V680S-D2KF68M	**V680-HS63**	Read distance	5.0 to 35.0 (axis offset ±10)	
		Write distance	5.0 to 35.0 (axis offset ±10)	
	V680-HS65	Read distance	5.0 to 55.0 (axis offset ±10)	
		Write distance	5.0 to 55.0 (axis offset ±10)	
V680-D2KF52M	**V680-HS51**	Read distance	0.5 to 5.5 (axis offset ±2)	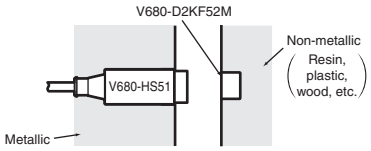
		Write distance	0.5 to 5.5 (axis offset ±2)	
	V680-HS52	Read distance	0.5 to 8.0 (axis offset ±2)	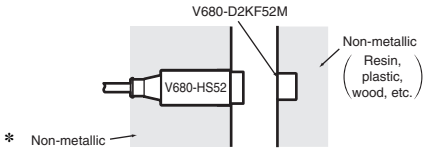
		Write distance	0.5 to 8.0 (axis offset ±2)	
	V680-HS63	Read distance	0.5 to 9.5 (axis offset ±2)	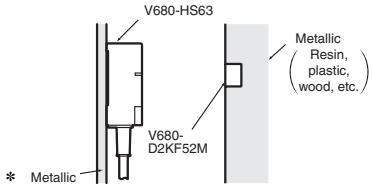
		Write distance	0.5 to 9.5 (axis offset ±2)	
V680-D2KF52M (embedded in metallic surface: steel)	**V680-HS51**	Read distance	0.5 to 3.5 (axis offset ±2)	
		Write distance	0.5 to 3.5 (axis offset ±2)	
	V680-HS52	Read distance	0.5 to 3.0 (axis offset ±2)	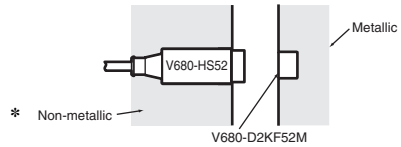
		Write distance	0.5 to 3.0 (axis offset ±2)	

* The Antenna can be mounted in metal, but the communications distance will decrease compared to mounting in nonmetal. Confirm performance using the actual devices before actual operation.

RF Tag (8-kbyte Memory) Communication

Recommended combination		Function	Communication range (unit: mm)	RF Tag and Antenna mounting conditions
RF Tag	Reader Writer			
V680S-D8KF67	**V680-HS52**	Read distance	1.0 to 17.0 (axis offset ±2)	
		Write distance	1.0 to 17.0 (axis offset ±2)	
	V680-HS63	Read distance	7.0 to 30.0 (axis offset ±10)	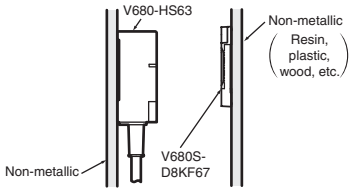
		Write distance	7.0 to 30.0 (axis offset ±10)	
	V680-HS65	Read distance	5.0 to 42.0 (axis offset ±10)	
		Write distance	5.0 to 42.0 (axis offset ±10)	
V680S-D8KF67M (flush-mounted on metallic surface: steel)	**V680-HS52**	Read distance	1.0 to 16.0 (axis offset ±2)	
		Write distance	1.0 to 16.0 (axis offset ±2)	
	V680-HS63	Read distance	6.0 to 25.0 (axis offset ±10)	
		Write distance	6.0 to 25.0 (axis offset ±10)	
	V680-HS65	Read distance	5.0 to 25.0 (axis offset ±10)	
		Write distance	5.0 to 25.0 (axis offset ±10)	
V680S-D8KF68	**V680-HS63**	Read distance	5.0 to 45.0 (axis offset ±10)	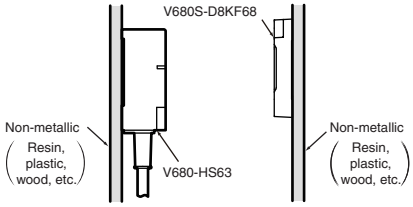
		Write distance	5.0 to 45.0 (axis offset ±10)	
	V680-HS65	Read distance	5.0 to 75.0 (axis offset ±10)	
		Write distance	5.0 to 75.0 (axis offset ±10)	

Recommended combination		Function	Communication range (unit: mm)	RF Tag and Antenna mounting conditions
RF Tag	Reader Writer			
V680S-D8KF68M	**V680-HS63**	Read distance	5.0 to 35.0 (axis offset ±10)	
		Write distance	5.0 to 35.0 (axis offset ±10)	
	V680-HS65	Read distance	5.0 to 55.0 (axis offset ±10)	
		Write distance	5.0 to 55.0 (axis offset ±10)	

Note: When mounting the V680-HS65, be sure to attach the Mounting Brackets at the base of the Antenna.
The enclosed Mounting Brackets do not need to be used, however, if the mounting brackets on the Antenna are metal plates and their dimensions are larger than the dimensions of the Antenna (100 × 100 mm).
For details, refer to the User's Manual (Cat. No. Z248 or Z262).

Bolt RF Tag (1-kbyte or 2-kbyte Memory) Communication

Recommended combination		Function	Communication range (unit: mm)	RF Tag and Antenna mounting conditions
RF Tag	Antenna			
V680-D1KP52M-BT01/ -BT11	**V680-HS51**	Read distance	0.5 to 2.5 (axis offset ±2)	
		Write distance	0.5 to 2.0 (axis offset ±2)	
	V680-HS52	Read distance	0.5 to 3.0 (axis offset ±2)	
		Write distance	0.5 to 2.5 (axis offset ±2)	
V680-D2KF52M-BT01/ -BT11	**V680-HS51**	Read distance	0.5 to 2.5 (axis offset ±2)	
		Write distance	0.5 to 2.5 (axis offset ±2)	
	V680-HS52	Read distance	0.5 to 2.0 (axis offset ±2)	
		Write distance	0.5 to 2.0 (axis offset ±2)	

✻ Mounting can be performed in metal, but the communications distance will decrease compared to mounting in nonmetal.
Confirm performance using the actual devices before actual operation.

Characteristic Data (for Reference Only)

Communication range (for Reference Only)

(unit: mm)

ID Controller (using the V680-CA5D0□-V2, CJ1W-V680C11/C12, or CS1W-V680-C11/C12)

1-kbyte Memory RF Tag

The values given for communications ranges are reference values. Refer to pages 16 to 18, 23 for communications distance specifications. The communications distance will depend on the RF Tags, ambient temperature, surrounding metal, noise, and other factors. Test operation completely when installing a system.

V680-HS52 (embedded in non-metallic material) & V680-D1KP52MT (embedded in non-metallic material)

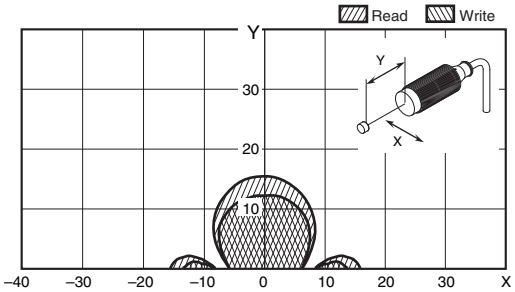

V680-HS52 (embedded in non-metallic material) & V680-D1KP52MT (embedded in metallic surface: steel)

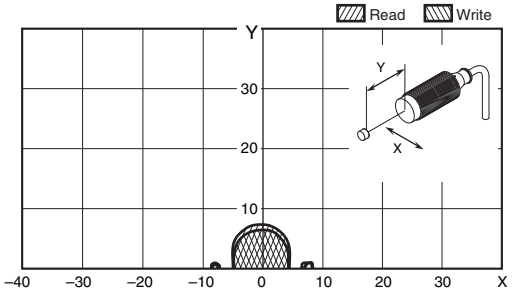

V680-HS51 (embedded in metallic material) & V680-D1KP52MT (embedded in non-metallic material)

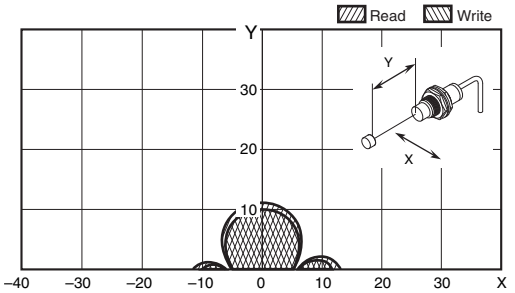

V680-HS51 (embedded in metallic material) & V680-D1KP52MT (embedded in metallic surface: steel)

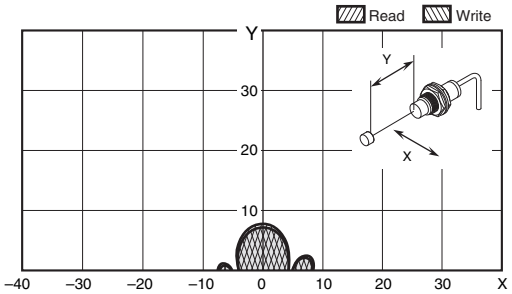

V680-HS63 (mounted on non-metallic material) & V680-D1KP52MT (embedded in non-metallic material)

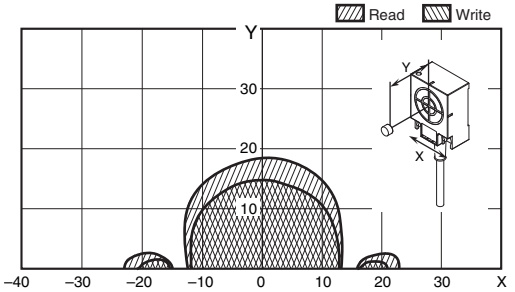

V680-HS51 (embedded in metallic material) & V680-D1KP53M (embedded in non-metallic material)

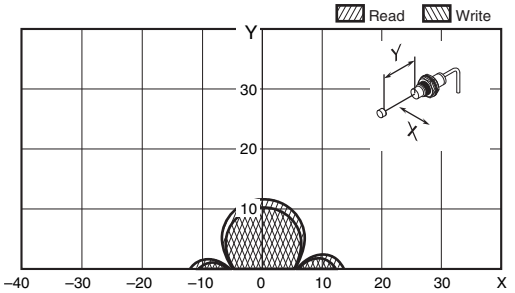

V680-HS51 (embedded in metallic material) & V680-D1KP53M (embedded in metallic surface: steel)

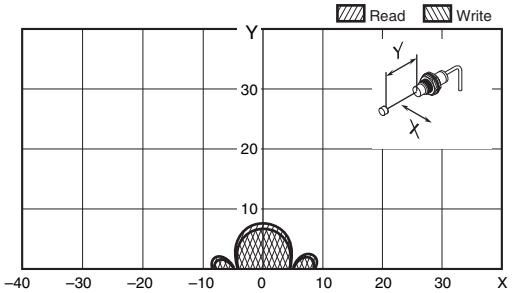

V680-HS52 (embedded in non-metallic material) & V680-D1KP53M (embedded in non-metallic material)

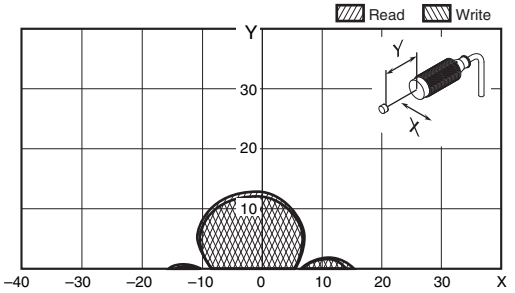

V680-HS52 (embedded in non-metallic material) & V680-D1KP53M (embedded in metallic surface: steel)

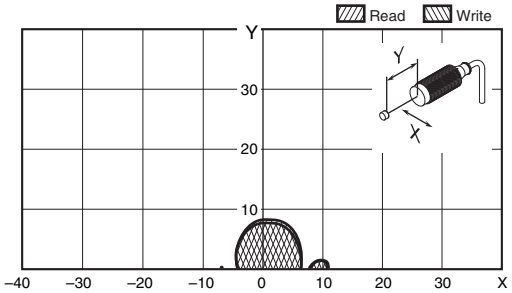

V680-HS52 (embedded in non-metallic material) & V680-D1KP54T (mounted on non-metallic material)

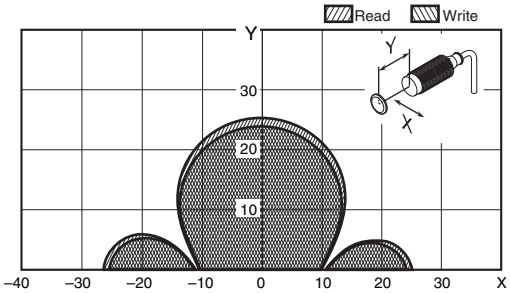

V680-HS63 (mounted on non-metallic material) & V680-D1KP54T (mounted on non-metallic material)

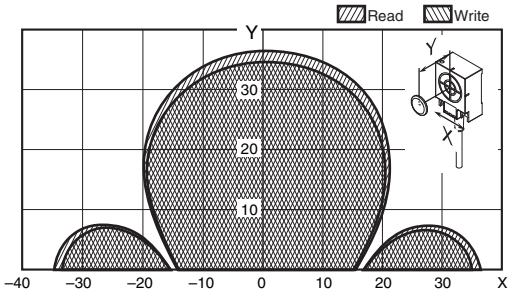

V680-HS65 (mounted on metallic material) & V680-D1KP54T (mounted on non-metallic material)

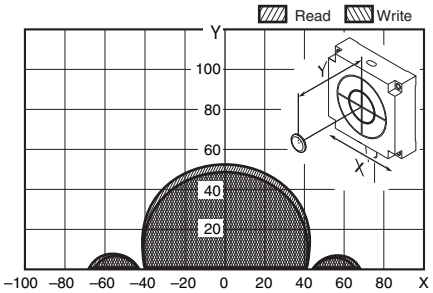

V680-HS52 (embedded in non-metallic material) & V680-D1KP66T (mounted on non-metallic material)

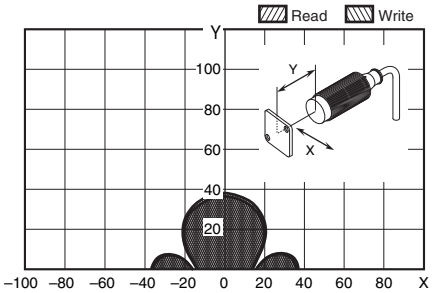

V680-HS63 (mounted on non-metallic material) & V680-D1KP66T (mounted on non-metallic material)

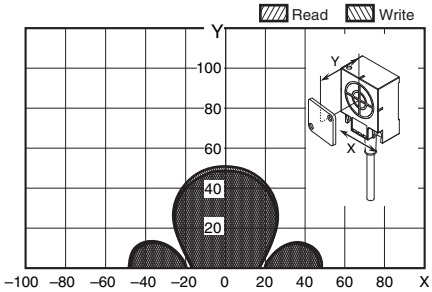

V680-HS65 (mounted on metallic material) & V680-D1KP66T (mounted on non-metallic material)

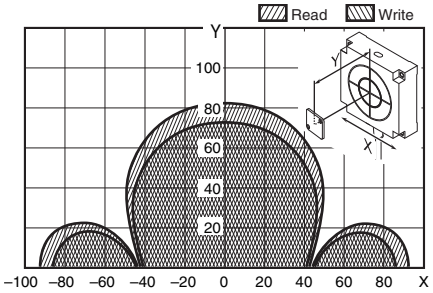

V680-H01-V2 (mounted on non-metallic material) & V680-D1KP66T (mounted on non-metallic material)

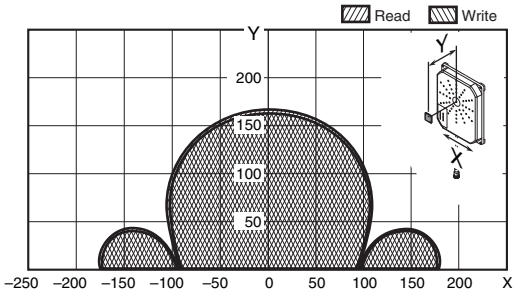

V680-HS52 (embedded in non-metallic material) & V680-D1KP66T-SP (mounted on non-metallic material)

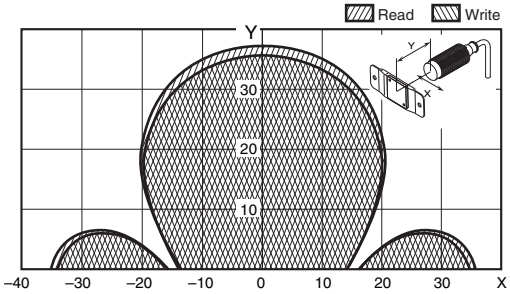

V680-HS63 (mounted on non-metallic material) & V680-D1KP66T-SP (mounted on non-metallic material)

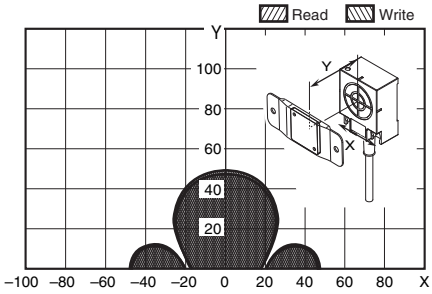

V680-HS65 (mounted on metallic material) & V680-D1KP66T-SP (mounted on non-metallic material)

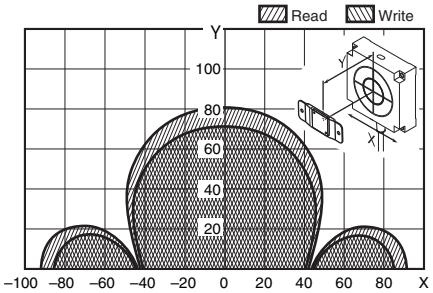

V680-HS52 (embedded in non-metallic material) & V680-D1KP66MT (mounted on metallic surface: steel)

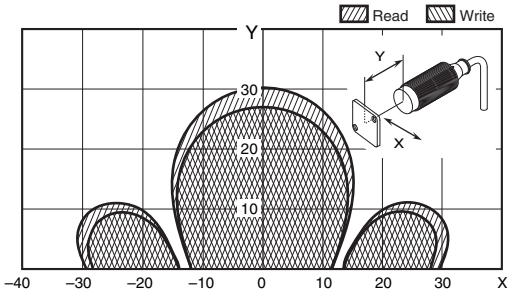

V680-HS63 (mounted on non-metallic material) & V680-D1KP66MT (mounted on metallic surface: steel)

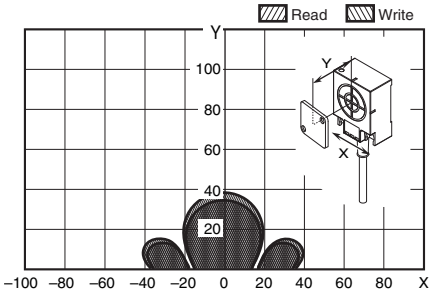

V680-HS65 (mounted on metallic material) & V680-D1K66MT (mounted on metallic surface: steel)

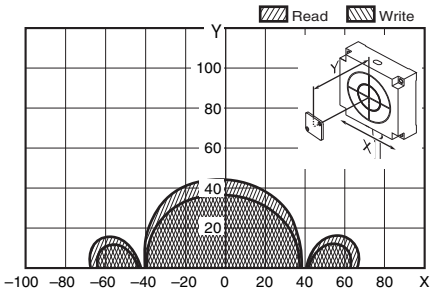

1-kbyte Memory Bolt RF Tags

V680-HS51 (embedded in metallic material) & V680-D1KP52M-BT01 (mounted in metal/non-metallic material)

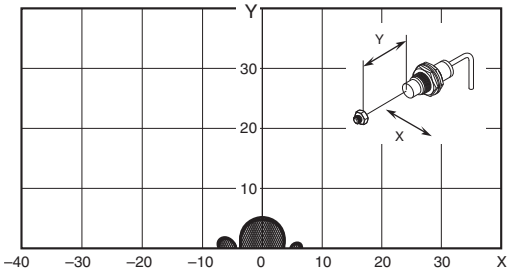

V680-HS51 (embedded in metallic material) & V680-D1KP52M-BT11 (mounted in metal/non-metallic material)

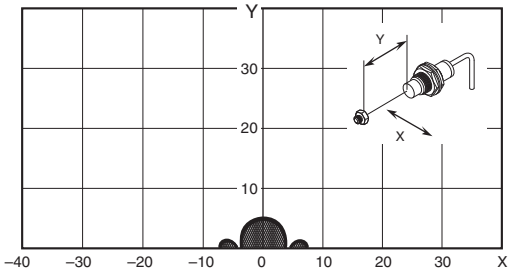

V680-HS52 (embedded in non-metallic material) & V680-D1KP52M-BT01 (mounted in metal/non-metallic material)

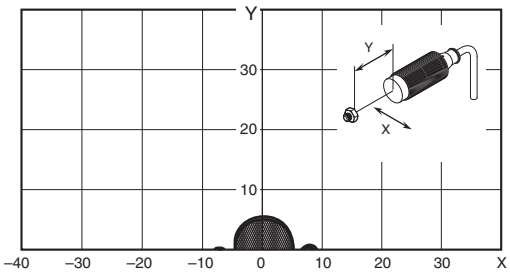

High-temperature Type 1-kbyte Memory RF Tags

V680-HS65 (with metal on back surface) & V680-D1KP58HTN

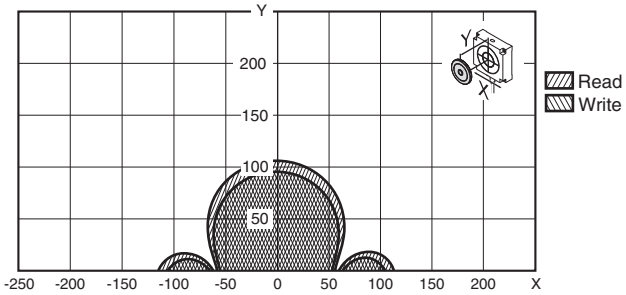

V680-H01-V2 and V680-D1KP58HTN

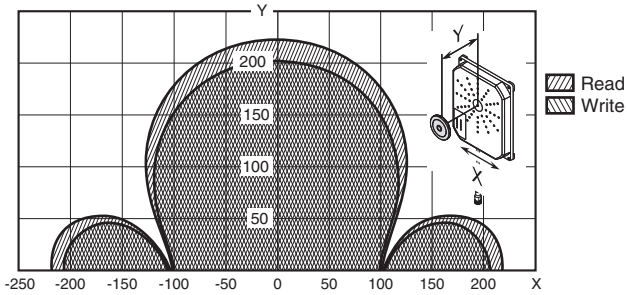

2-kbyte Memory RF Tag

The values given for communications ranges are reference values. Refer to pages 19 to 20, 23 for communications distance specifications. The communications distance will depend on the RF Tags, ambient temperature, surrounding metal, noise, and other factors. Test operation completely when installing a system.

V680-HS63 (mounted on non-metallic material) & V680S-D2KF67 (mounted on non-metallic material)

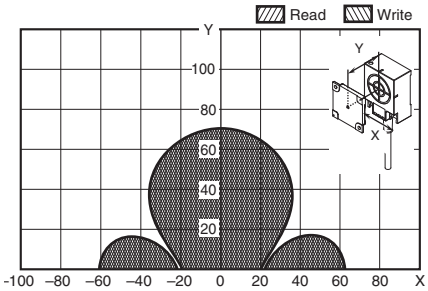

V680-HS65 (mounted on metallic material) & V680S-D2KF67 (mounted on non-metallic material)

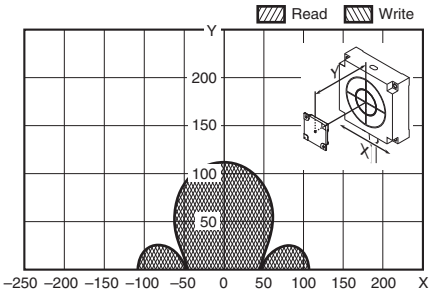

V680-H01-V2 (mounted on non-metallic material) & V680S-D2KF67 (mounted on non-metallic material)

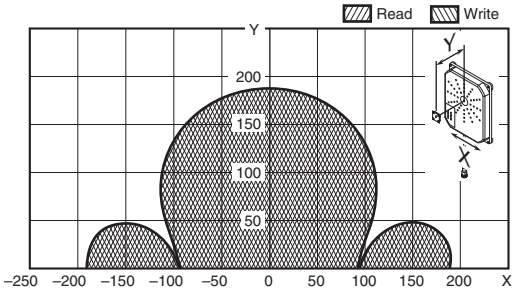

V680-HS52 (embedded in non-metallic material) & V680S-D2KF67M (mounted on metallic surface: steel)

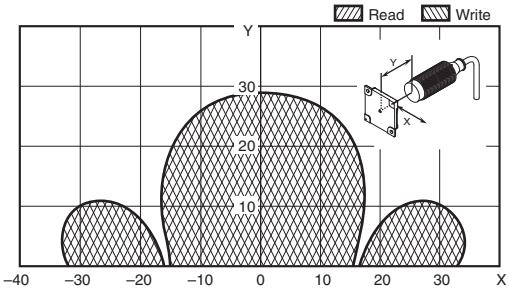

V680-HS63 (mounted on non-metallic material) & V680S-D2KF67M (mounted on metallic surface: steel)

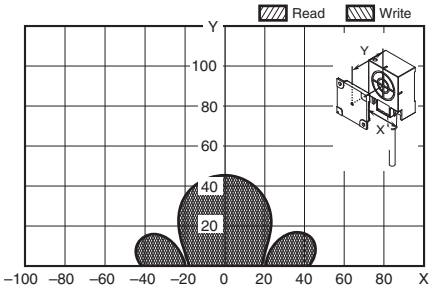

V680-HS65 (mounted on metallic material) & V680S-D2KF67M (mounted on metallic surface: steel)

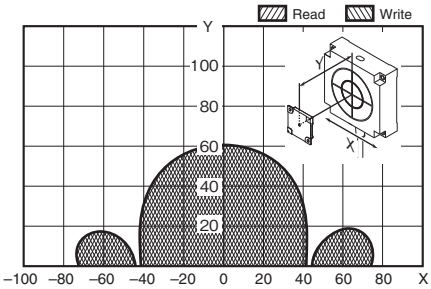

V680-HS63 (with Metal on Back Surface) & V680S-DKF68 (Tag direction: Horizontal)

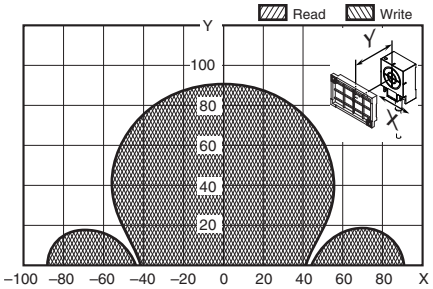

V680-HS63 (with Metal on Back Surface) & V680S-DKF68 (Tag direction: Vertical)

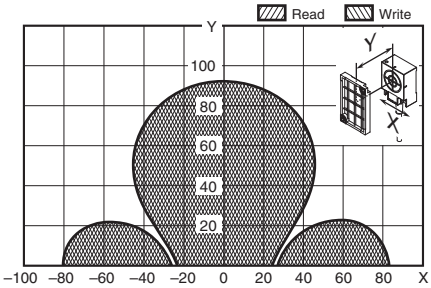

V680-HS65 (with Metal on Back Surface) & V680S-DKF68 (Tag direction: Horizontal)

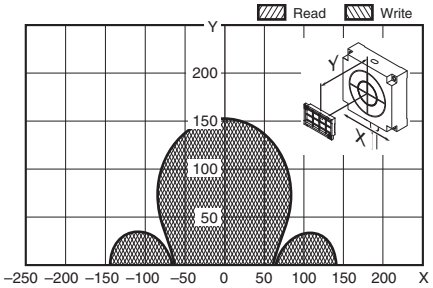

V680-HS65 (with Metal on Back Surface) & V680S-DKF68 (Tag direction: Vertical)

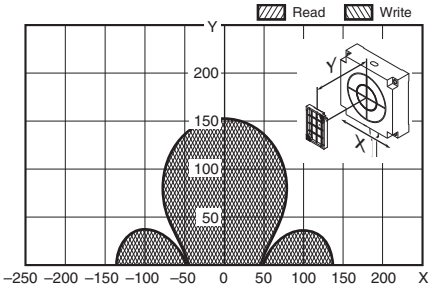

V680-H01-V2 (with Non-Metal on Back Surface) & V680S-DKF68 (Tag direction: Horizontal)

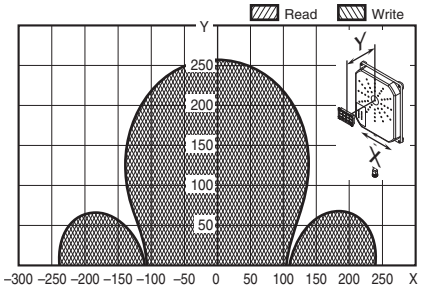

V680-H01-V2 (with Non-Metal on Back Surface) & V680S-DKF68 (Tag direction: Vertical)

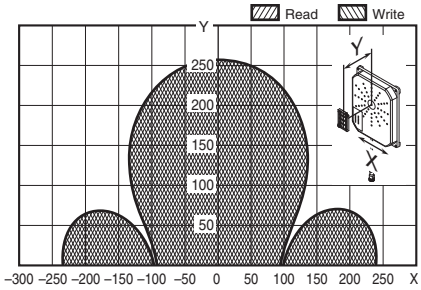

V680-HS63 (with Metal on Back Surface) & V680S-DKF68 (Metal on back: Steel) (Tag direction: Horizontal)

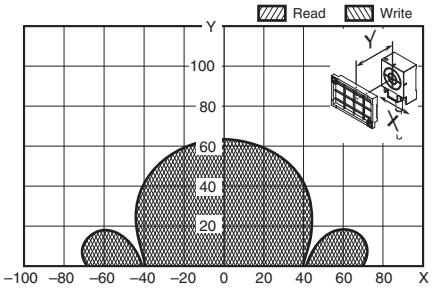

V680-HS63 (with Metal on Back Surface) & V680S-DKF68 (Metal on back: Steel) (Tag direction: Vertical)

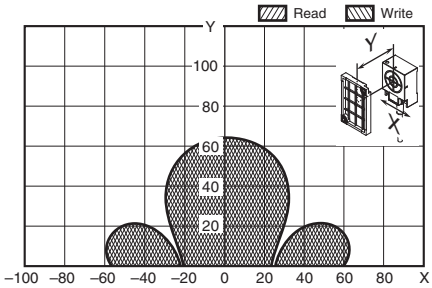

V680-HS65 (with Metal on Back Surface) & V680S-DKF68 (Metal on back: Steel) (Tag direction: Horizontal)

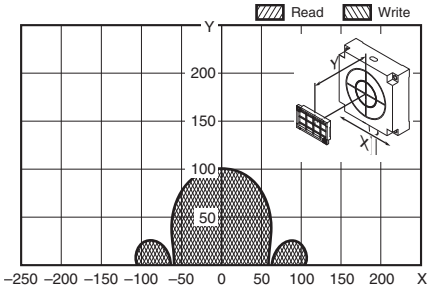

V680-HS65 (with Metal on Back Surface) & V680S-DKF68 (Metal on back: Steel) (Tag direction: Vertical)

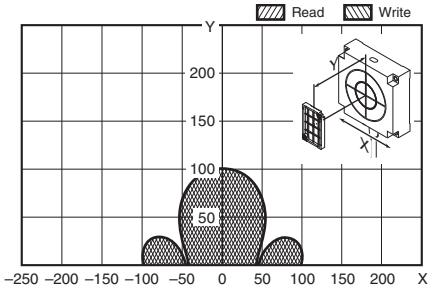

V680-HS52 (embedded in non-metallic material) & V680-D2KF52M (embedded in non-metallic material)

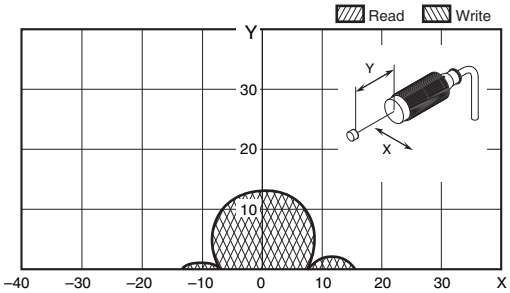

V680-HS52 (embedded in non-metallic material) & V680-D2KF52M (embedded in metallic surface: steel)

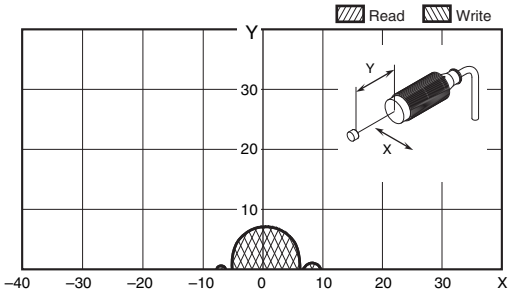

V680-HS51 (embedded in metallic material) & V680-D2KF52M (embedded in non-metallic material)

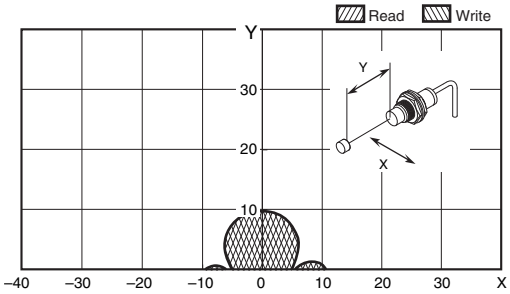

V680-HS51 (embedded in metallic material) & V680-D2KF52M (embedded in metallic surface: steel)

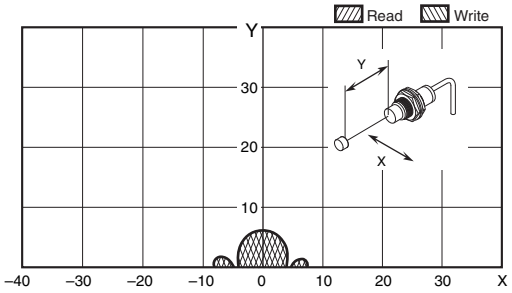

V680-HS63 (mounted on non-metallic material) & V680-D2KF52M (embedded in non-metallic material)

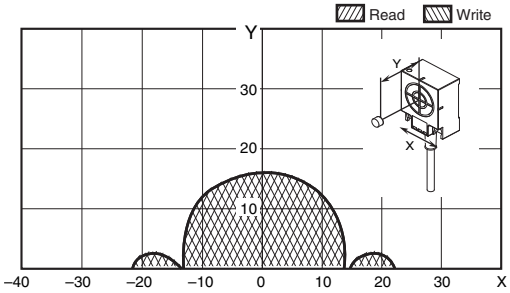

V680-HS52 (embedded in Non-Metal) & V680S-D2KF67 (mounted on non-metallic material)

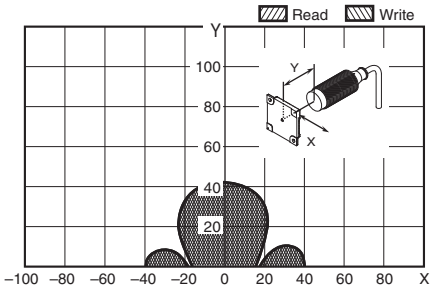

2-kbyte Memory Bolt RF Tags

V680-HS51 (embedded in metallic material) & V680-D2KF52M-BT01 (mounted in metal/non-metallic material)

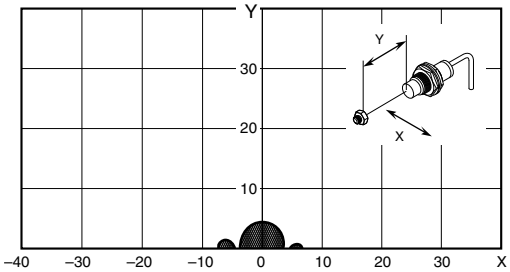

V680-HS51 (embedded in metallic material) & V680-D2KF52M-BT11 (mounted in metal/non-metallic material)

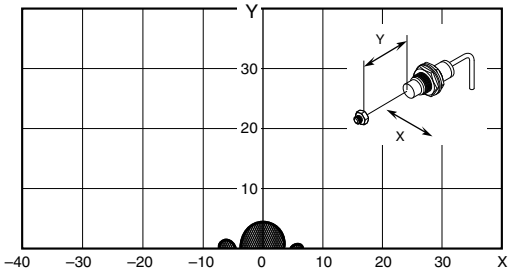

V680-HS52 (embedded in non-metallic material) & V680-D2KF52M-BT01 (mounted in metal/non-metallic material)

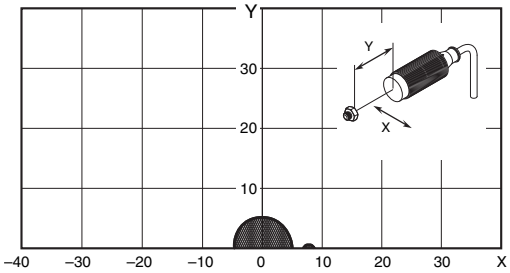

8-kbyte Memory RF Tag

The values given for communications ranges are reference values. Refer to pages 21 to 22 for communications distance specifications. The communications distance will depend on the RF Tags, ambient temperature, surrounding metal, noise, and other factors. Test operation completely when installing a system.

V680-HS52 (embedded in non-metallic material) &V680S-D8KF67

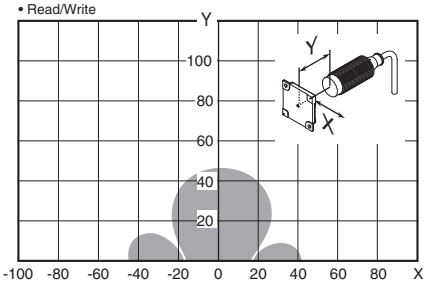

V680-HS63 (mounted on non-metallic material) &V680S-D8KF67

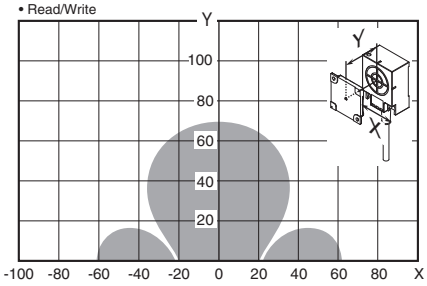

V680-HS65 (mounted on metallic material) &V680S-D8KF67

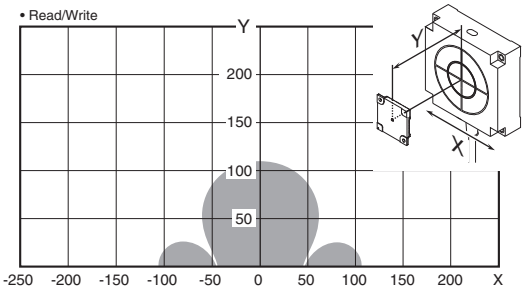

V680-H01-V2 (mounted on non-metallic material) &V680S-D8KF67

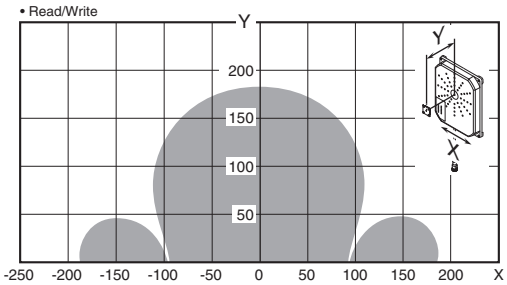

V680-HS52 (embedded in non-metallic material) & V680S-D8KF67M (mounted on metallic surface: steel)

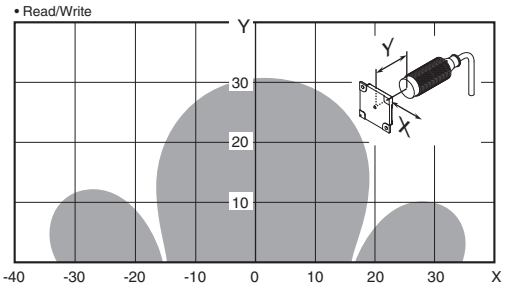

V680-HS63 (mounted on non-metallic material) & V680S-D8KF67M (mounted on metallic surface: steel)

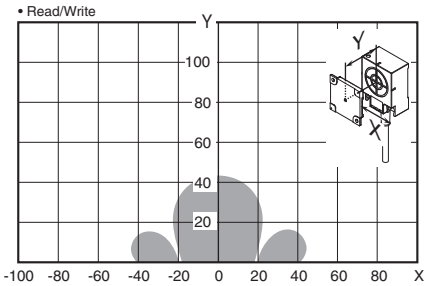

V680-HS65 (mounted in metal) & V680S-D8KF67M (mounted on metallic surface: steel)

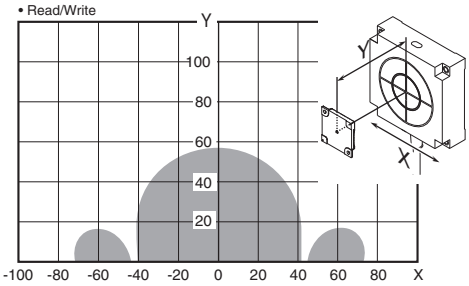

V680-HS63 (mounted on non-metallic material) & V680S-D8KF68 (Tag direction: Horizontal)

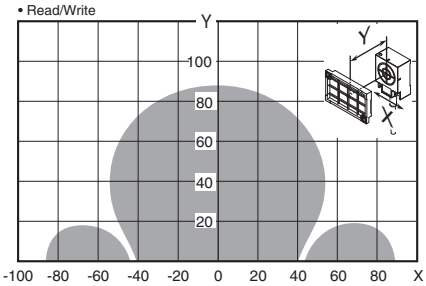

V680-HS63 (mounted on non-metallic material) & V680S-D8KF68 (Tag direction: Vertical)

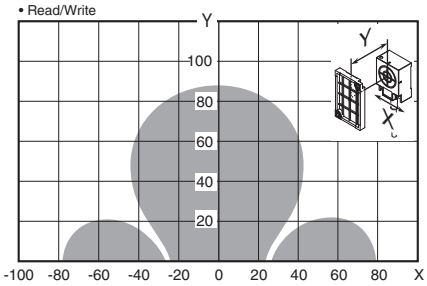

V680-HS65 (mounted on metallic material) & V680S-D8KF68 (Tag direction: Horizontal)

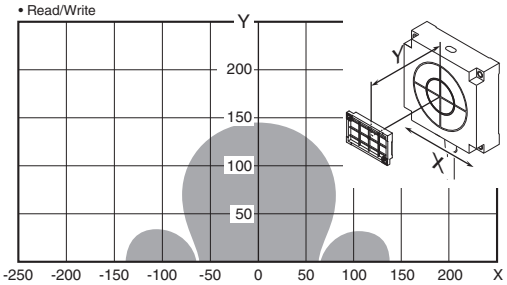

V680-HS65 (mounted on metallic material) & V680S-D8KF68 (Tag direction: Vertical)

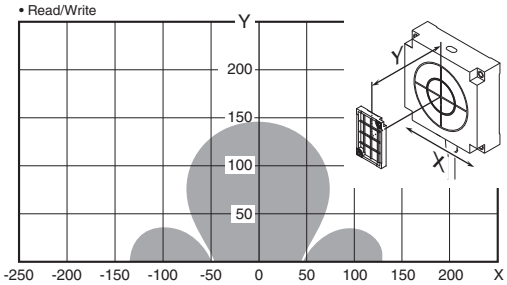

V680-H01-V2 (mounted on non-metallic material) & V680S-D8KF68 (Tag direction: Horizontal)

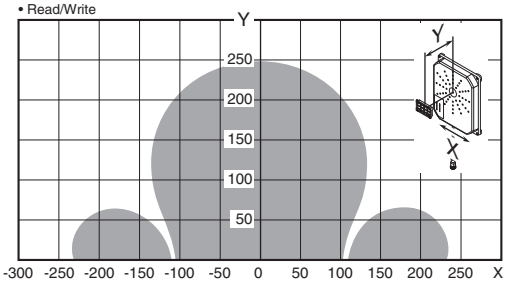

V680-H01-V2 (mounted on non-metallic material) & V680S-D8KF68 (Tag direction: Vertical)

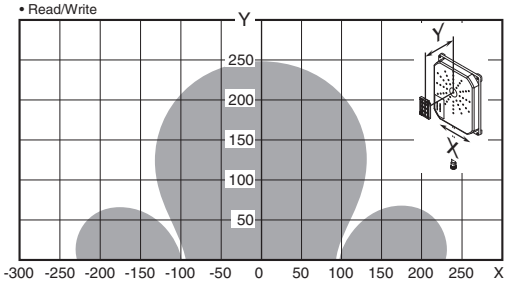

V680-HS63 (mounted on non-metallic material) & V680S-D8KF68M (Metal on back: Steel (Tag direction: Horizontal))

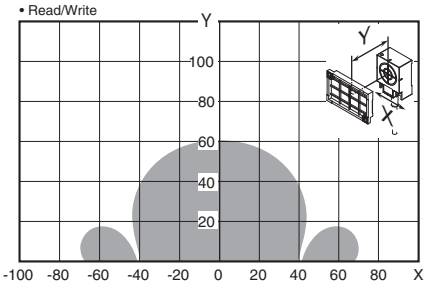

V680-HS63 (mounted on non-metallic material) & V680S-D8KF68M (Metal on back: Steel (Tag direction: Vertical))

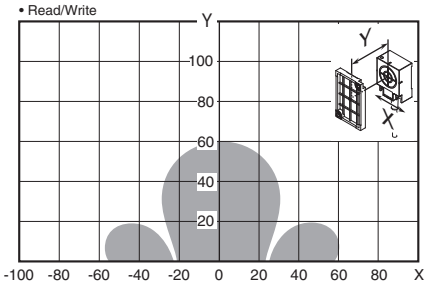

V680-HS65 (mounted on metallic material) & V680S-D8KF68M (Metal on back: Steel (Tag direction: Horizontal))

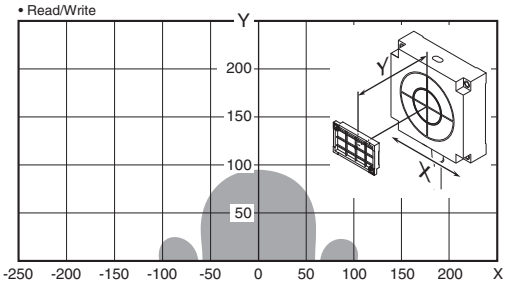

V680-HS65 (mounted on metallic material) & V680S-D8KF68M (Metal on back: Steel (Tag direction: Vertical))

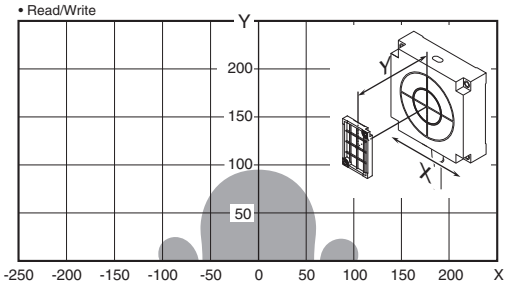

DeviceNet ID Slave (When Using the V680-HAM42-DRT)
PROFIBUS ID Slave (When Using the V680-HAM42-PRT)
ID Flag Sensors (When Using the V680-HAM91/-HAM81)

1-kbyte Memory RF Tag

The values given for communications ranges are reference values. Refer to pages 24 to 25, 29 for communications distance specifications. For information on the combinations that can be used, refer to Combinations of Amplifier Units, Antennas, and RF Tags on pages 2 to 3. The communications distance will depend on the RF Tags, ambient temperature, surrounding metal, noise, and other factors. Test operation completely when installing a system.

V680-HS52 (embedded in non-metallic material) & V680-D1KP52MT (embedded in non-metallic material)

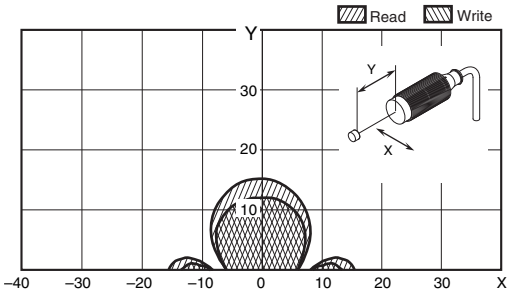

V680-HS52 (embedded in non-metallic material) & V680-D1KP52MT (embedded in metallic surface: steel)

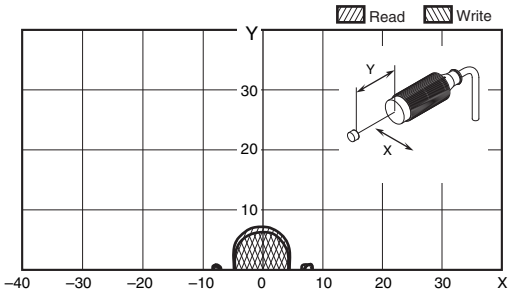

V680-HS51 (embedded in metallic material) & V680-D1KP52MT (embedded in non-metallic material)

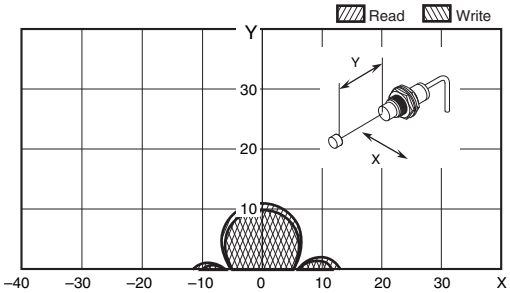

V680-HS51 (embedded in metallic material) & V680-D1KP52MT (embedded in metallic surface: steel)

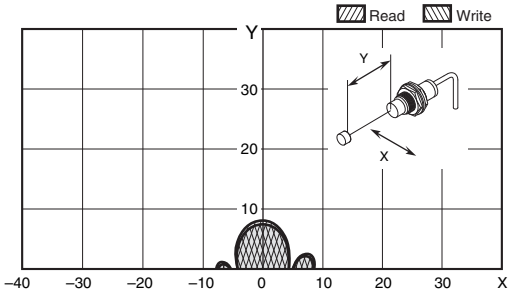

V680-HS63 (mounted on non-metallic material) & V680-D1KP52MT (embedded in non-metallic material)

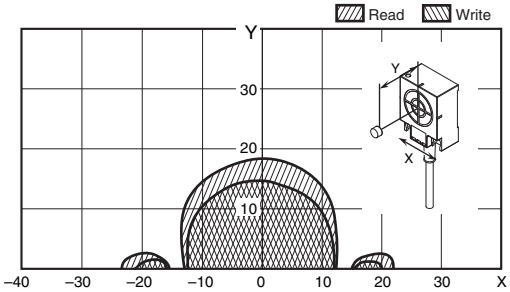

V680-HS52 (embedded in non-metallic material) & V680-D1KP66T (mounted on non-metallic material)

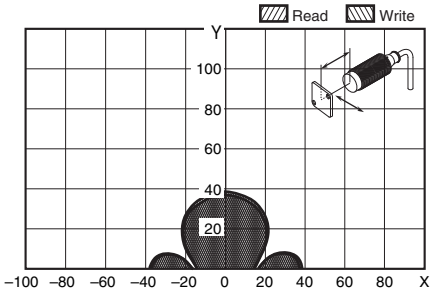

V680-HS63 (mounted on non-metallic material) & V680-D1KP66T (mounted on non-metallic material)

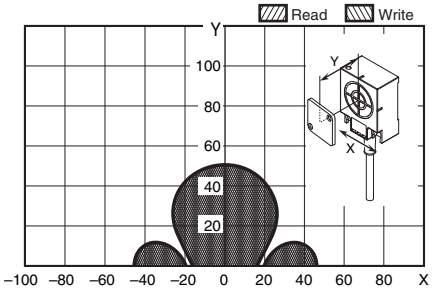

V680-HS65 (mounted on metallic material) & V680-D1KP66T (mounted on non-metallic material)

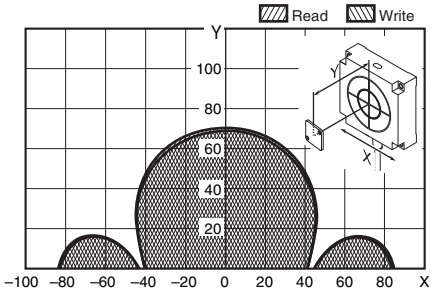

V680-HS52 (embedded in non-metallic material) & V680-D1KP66T-SP (embedded in non-metallic material)

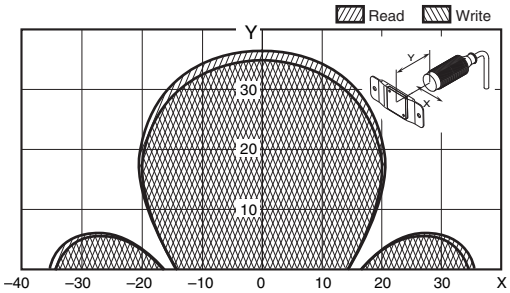

V680-HS63 (mounted on non-metallic material) & V680-D1KP66T-SP (mounted on non-metallic material)

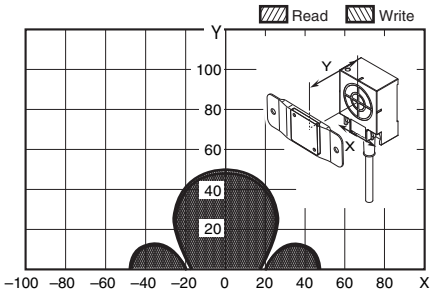

V680-HS65 (mounted on metallic material) & V680-D1KP66T-SP (mounted on non-metallic material)

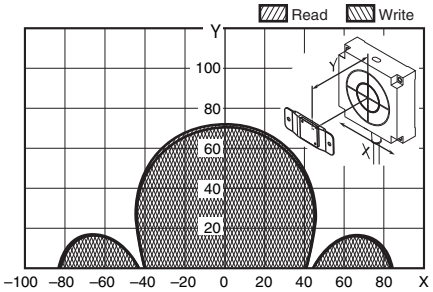

V680-HS52 (embedded in non-metallic material) & V680-D1KP66MT (mounted on metallic surface: steel)

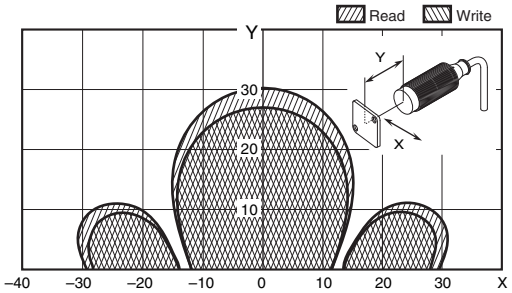

V680-HS63 (mounted on non-metallic material) & V680-D1KP66MT (mounted on metallic surface: steel)

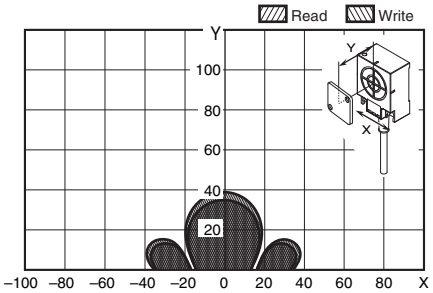

V680-HS65 (mounted on metallic material) & V680-D1K66MT (mounted on metallic surface: steel)

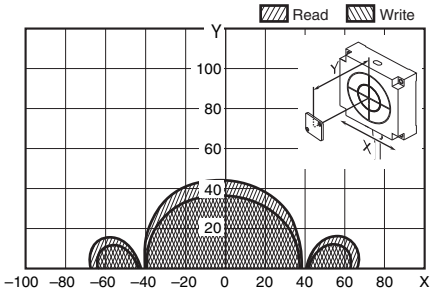

1-kbyte Memory Bolt RF Tags

V680-HS51 (embedded in metallic material) & V680-D1KP52M-BT01 (mounted in metal/non-metallic material)

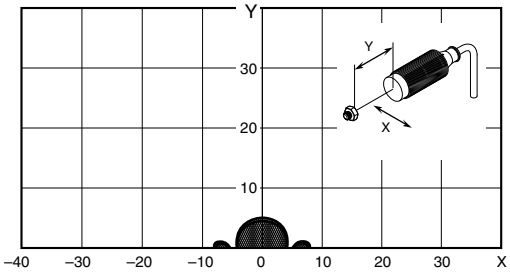

V680-HS52 (embedded in non-metallic material) & V680-D1KP52M-BT01 (mounted in metal/non-metallic material)

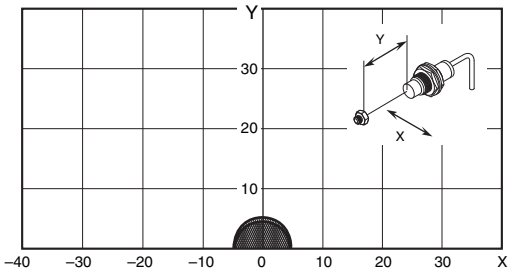

2-kbyte Memory RF Tag

The values given for communications ranges are reference values. Refer to pages 26 to 27, 29 for communications distance specifications. For information on the combinations that can be used, refer to Combinations of Amplifier Units, Antennas, and RF Tags on pages 2 to 3. The communications distance will depend on the RF Tags, ambient temperature, surrounding metal, noise, and other factors. Test operation completely when installing a system.

V680-HS63 (mounted on non-metallic material) & V680S-D2KF67 (mounted on non-metallic material)

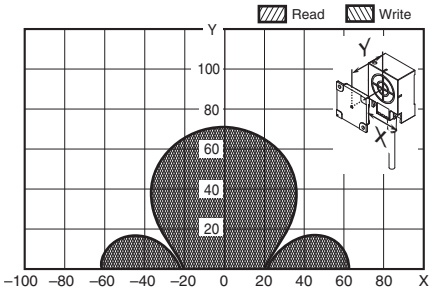

V680-HS65 (mounted on metallic material) & V680S-D2KF67 (mounted on non-metallic material)

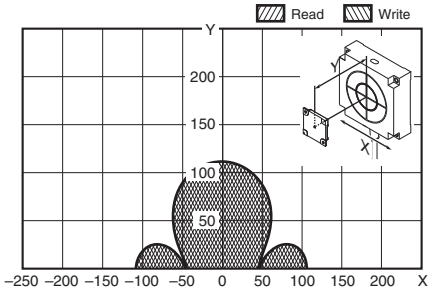

V680-HS52 (embedded in non-metallic material) & V680S-D2KF67M (mounted on metallic surface: steel)

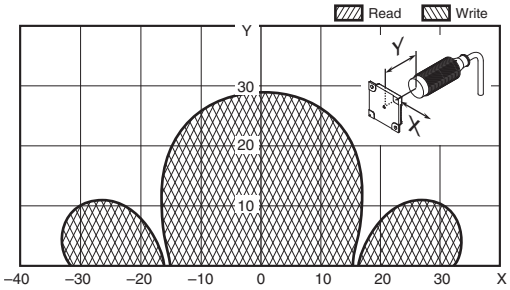

V680-HS63 (mounted on non-metallic material) & V680S-D2KF67M (mounted on metallic surface: steel)

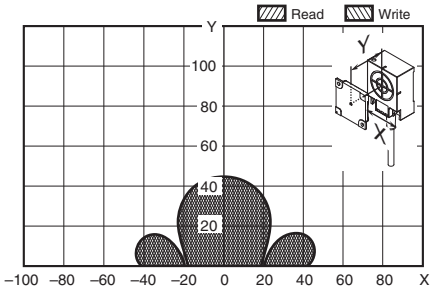

V680-HS65 (mounted on metallic material) &
V680S-D2KF67M (mounted on metallic surface: steel)

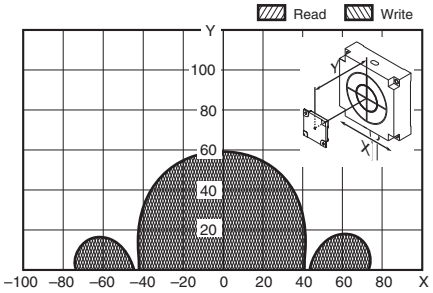

V680-HS63 (with Metal on Back Surface) &
V680S-D2KF68 (Tag direction: Horizontal)

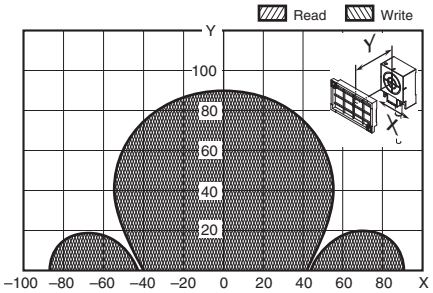

V680-HS63 (with Metal on Back Surface) &
V680S-D2KF68 (Tag direction: Vertical)

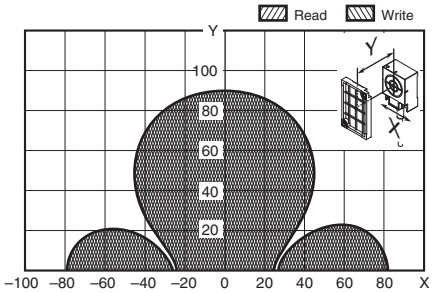

V680-HS65 (with Metal on Back Surface) &
V680S-D2KF68 (Tag direction: Horizontal)

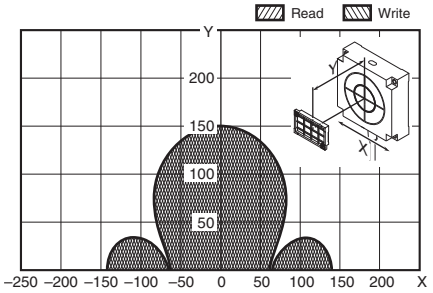

V680-HS65 (with Metal on Back Surface) &
V680S-D2KF68 (Tag direction: Vertical)

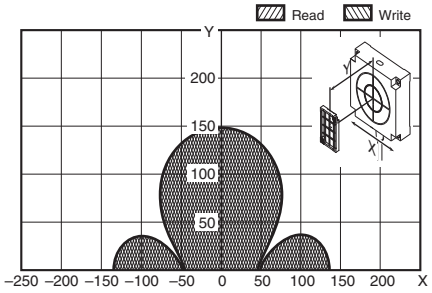

V680-HS63 (with Metal on Back Surface) &
V680S-D2KF68M (Metal on back: Steel) (Tag direction: Horizontal)

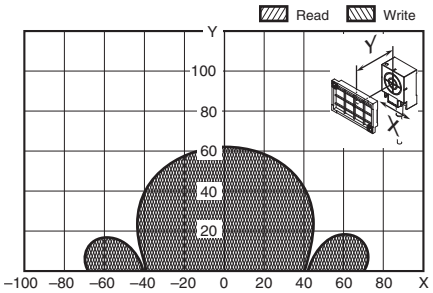

V680-HS63 (with Metal on Back Surface) &
V680S-D2KF68M (Metal on back: Steel) (Tag direction: Vertical)

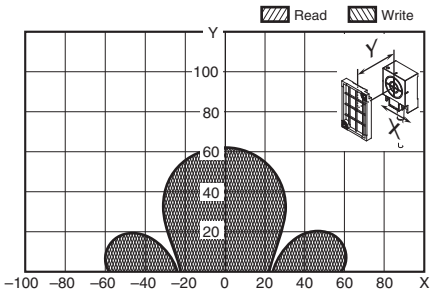

V680-HS65 (with Metal on Back Surface) &
V680S-D2KF68M (Metal on back: Steel) (Tag direction: Horizontal)

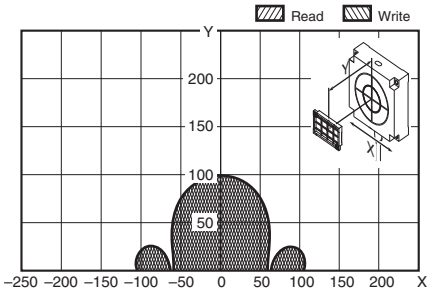

V680-HS65 (with Metal on Back Surface) &
V680S-D2KF68M (Metal on back: Steel) (Tag direction: Vertical)

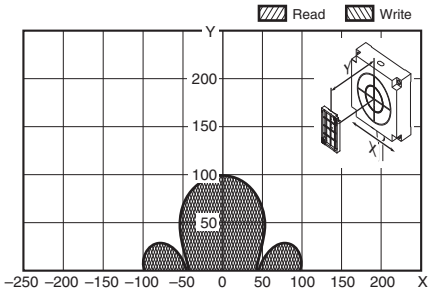

V680-HS52 (embedded in non-metallic material) & V680-D2KF52M (embedded in non-metallic material)

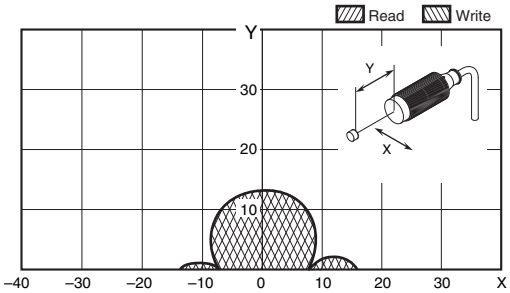

V680-HS52 (embedded in non-metallic material) & V680-D2KF52M (embedded in metallic surface: steel)

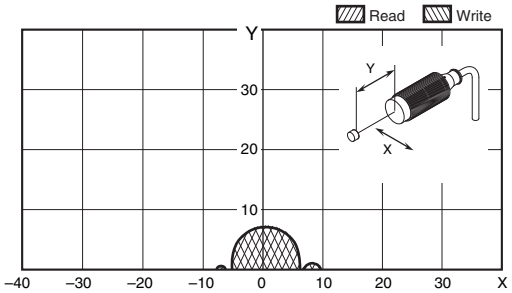

V680-HS51 (embedded in metallic material) & V680-D2KF52M (embedded in non-metallic material)

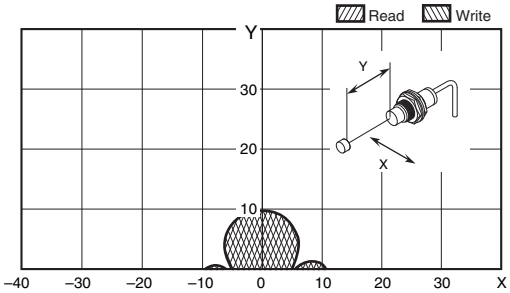

V680-HS51 (embedded in metallic material) & V680-D2KF52M (embedded in metallic surface: steel)

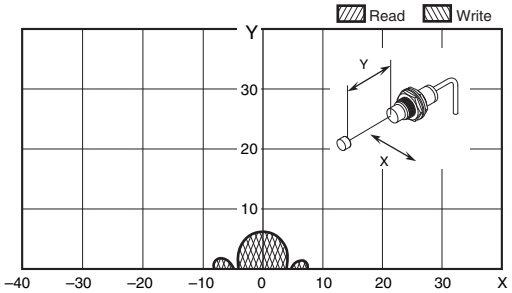

V680-HS63 (mounted on non-metallic material) & V680-D2KF52M (embedded in non-metallic material)

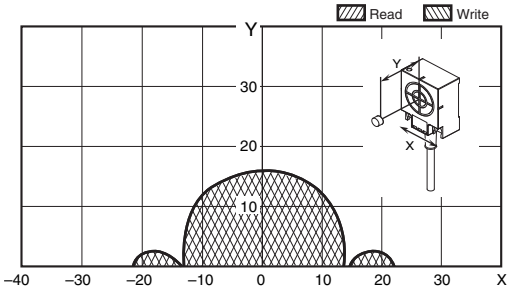

V680-HS52 (embedded in non-metallic material) & V680S-D2KF67 (mounted on non-metallic material)

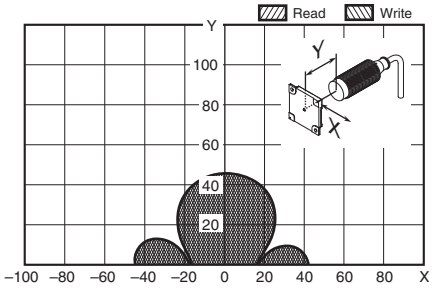

2-kbyte Memory Bolt RF Tags

V680-HS51 (embedded in metallic material) & V680-D2KF52M-BT01 (mounted in metal/non-metallic material)

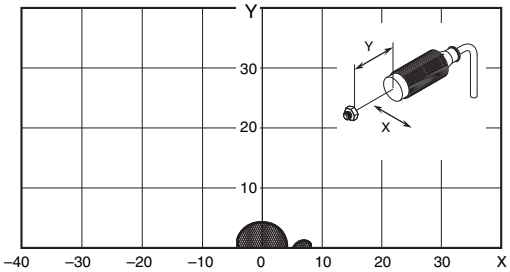

V680-HS52 (embedded in non-metallic material) & V680-D2KF52M-BT01 (mounted in metal/non-metallic material)

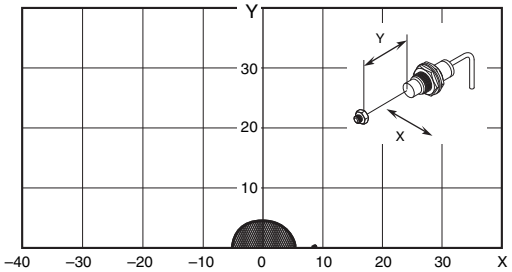

8-kbyte Memory RF Tag

The values given for communications ranges are reference values. Refer to pages 28 to 29 for communications distance specifications. For information on the combinations that can be used, refer to Combinations of Amplifier Units, Antennas, and RF Tags on pages 2 to 3. The communications distance will depend on the RF Tags, ambient temperature, surrounding metal, noise, and other factors. Test operation completely when installing a system.

V680-HS52 (embedded on non-metallic material) &V680S-D8KF67

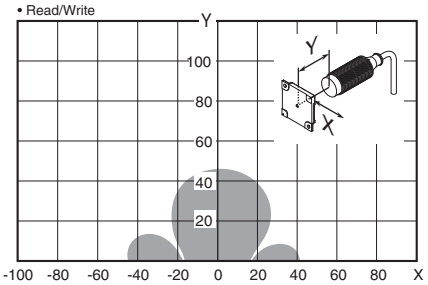

V680-HS63 (mounted on non-metallic material) &V680S-D8KF67

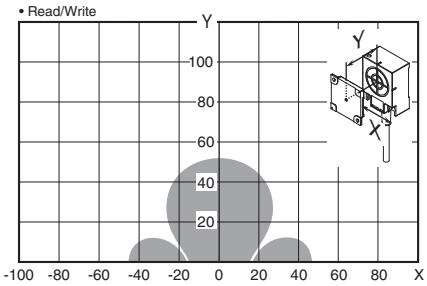

V680-HS65 (mounted on metallic material) &V680S-D8KF67

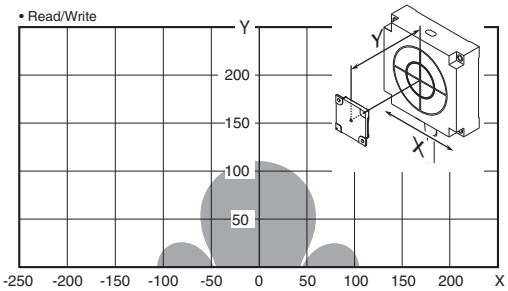

V680-HS52 (embedded on non-metallic material) & V680S-D8KF67M (mounted on metallic surface: steel)

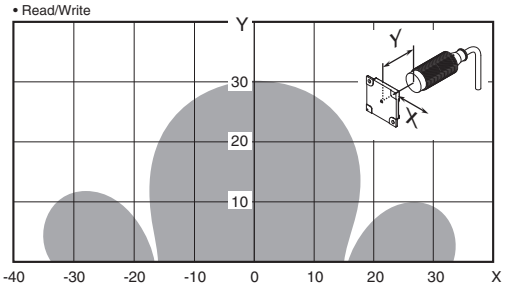

V680-HS63 (mounted on non-metallic material) & V680S-D8KF67M (mounted on metallic surface: steel)

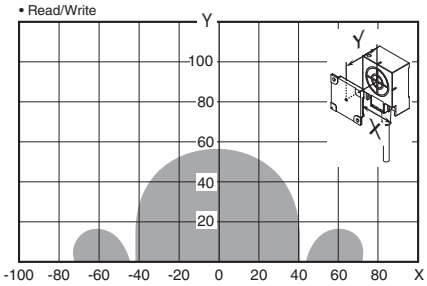

V680-HS65 (mounted on metallic material) & V680S-D8KF67M (mounted on metallic surface: steel)

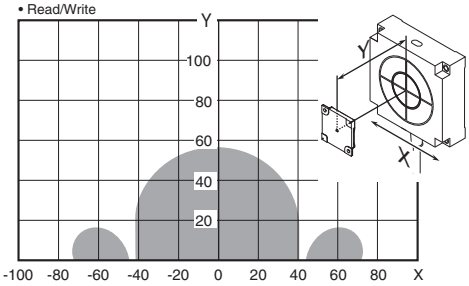

V680-HS63 (mounted on metallic surface: steel) & V680S-D8KF68 (Tag direction: Horizontal)

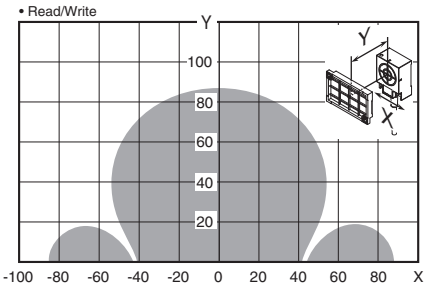

V680-HS63 (mounted on metallic surface: steel) & V680S-D8KF68 (Tag direction: Vertical)

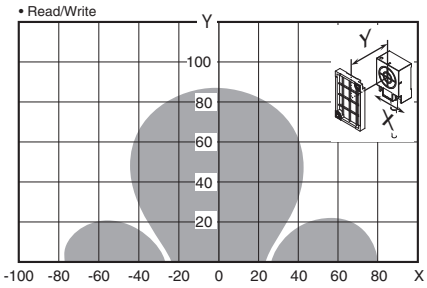

V680-HS65 (mounted on metallic surface: steel) & V680S-D8KF68 (Tag direction: Horizontal)

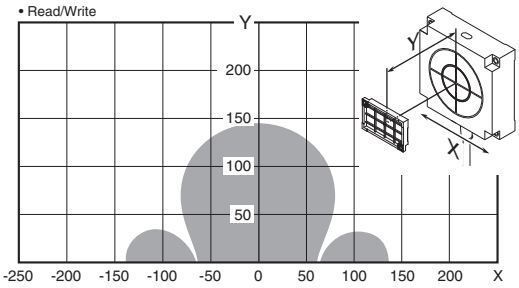

V680-HS65 (mounted on metallic surface: steel) & V680S-D8KF68 (Tag direction: Vertical)

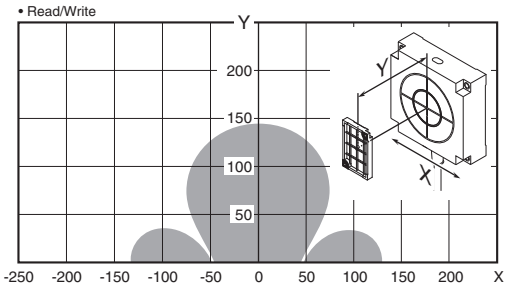

V680-HS63 (mounted on metallic surface: steel) & V680S-D8KF68M (Tag direction: Horizontal)

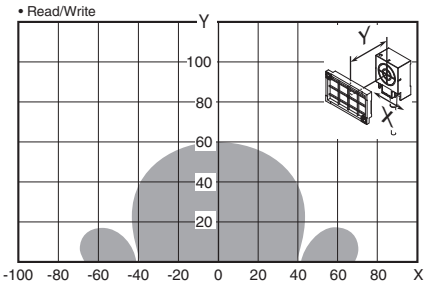

V680-HS63 (mounted on metallic surface: steel) & V680S-D8KF68M (Tag direction: Vertical)

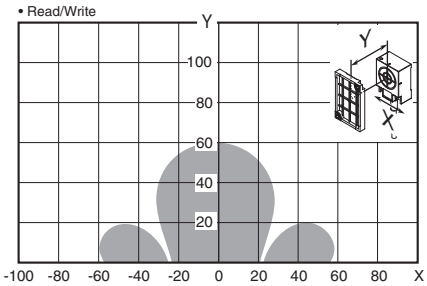

V680-HS65 (mounted on metallic surface: steel) & V680S-D8KF68M (Tag direction: Horizontal)

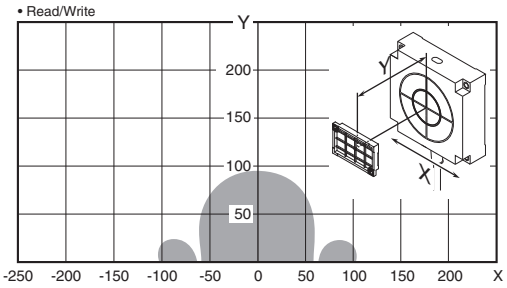

V680-HS65 (mounted on metallic surface: steel) & V680S-D8KF68M (Tag direction: Vertical)

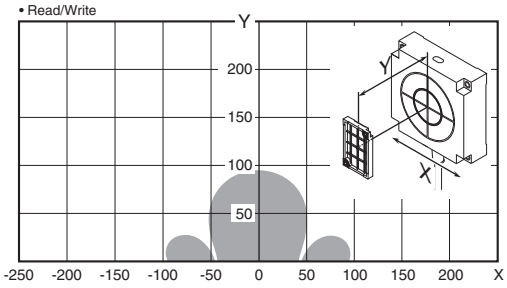

Communications Time

Communications Time between Antennas and Tags

ID Controllers (V680-CA5D0□-V2, CJ1W-V680C11/C12, CS1W-V680C11/12)

1-kbyte Memory RF Tag

V680-D1KP□ (used in combination with the V680-HS□□ Antenna, V680-HA63A Amplifier Unit and V680-H01-V2 Antenna)
V680-D1KP58HTN (used in combination with the V680-H01-V2 Antenna)

●Communications speed: Normal mode

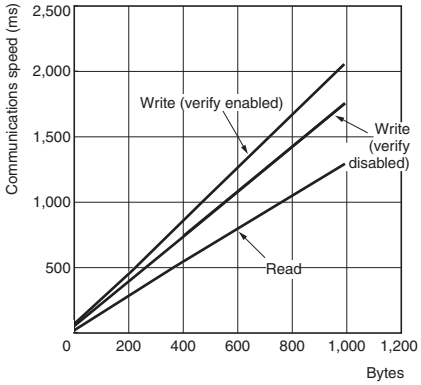

●Communications speed: High-speed mode

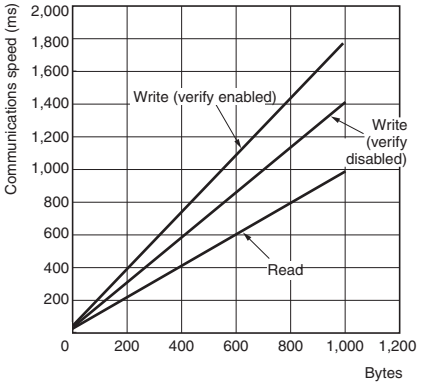

Communications speed setting	Command	Write verification setting	Communications time N: No. of bytes processed
Normal mode	Read	–	T=1.3N+31
	Write	Enabled	T=2.1N+58
		Disabled	T=1.8N+56
High-speed mode ✻1, ✻2	Read	–	T=1.0N+29
	Write	Enabled	T=1.8N+51
		Disabled	T=1.5N+47

✻1. The V680-H01 Antenna cannot be used in high-speed mode.
✻2. When using multi-access or FIFO communications options, normal-mode communications speed will be used regardless of the high-speed mode setting.

2-kbyte Memory RF Tag

V680S-D2KF□□, V680S-D2KF52M/-D2KF52M-BT□□ (used in combination with the V680-HS□□ Antenna, V680-HA63B Amplifier Unit and V680-H01-V2 Antenna)

●Communications speed: Normal mode

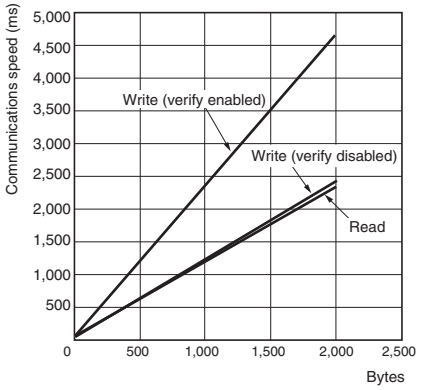

●Communications speed: High-speed mode

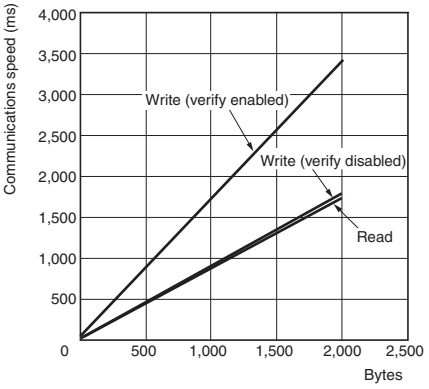

Communications speed setting	Command	Write verification setting	Communications time N: No. of bytes processed
Normal mode	Read	–	T=1.2N+30
	Write	Enabled	T=2.4N+49
		Disabled	T=1.2N+49
High-speed mode ✻	Read	–	T=0.9N+27
	Write	Enabled	T=1.7N+49
		Disabled	T=0.9N+41

✻ When using multi-access or FIFO communications options, normal-mode communications speed will be used regardless of the high-speed mode setting.

8-kbyte Memory RF Tag

V680S-D8KF□□
(used in combination with the V680-HS□□ Antenna and V680-HA63B Amplifier Unit)

●Communications speed: Normal mode

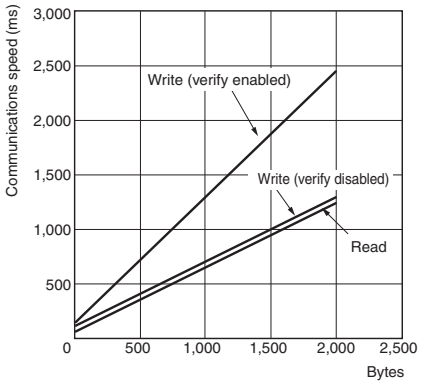

●Communications speed: High-speed mode

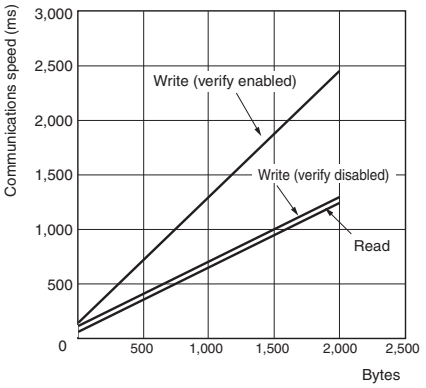

Communications speed setting	Command	Communications time N: No. of bytes processed
Normal mode	Read	T=0.6N+47
	Write (verify enabled)	T=1.2N+128
	Write (verify disabled)	T=0.6N+101
High-speed mode ✻	Read	T=0.6N+47
	Write (verify enabled)	T=1.2N+128
	Write (verify disabled)	T=0.6N+101

✻ When using V680S-D8KF□□ RF Tag, normal-mode communications speed will be used regardless of the high-speed mode setting.

Communications Time (Communications Time between Antenna and RF Tag + Processing Time at Amplifier Unit)

DeviceNet ID Slave (V680-HAM42-DRT)
PROFIBUS ID Slave (V680-HAM42-PRT)

1-kbyte Memory RF Tags

V680-D1KP□□ (V680-HS□□ Antenna)

Communications time setting	Command	Communications time (ms)			
		4-byte Access Mode	26-byte Access Mode	58-byte Access Mode	V600-compatible mode ✻
Normal	Read	67	95	137	67
	Write with Verification	105	143	210	105
	Data Fill	V680-HAM42-DRT: 17.5 × No. of processed blocks + 89.2 V680-HAM42-PRT: 20.6 × No. of processed blocks + 76.8			–
High speed	Read	63	85	117	–
	Write with Verification	89	128	186	–
	Data Fill	V680-HAM42-DRT: 14.8 × No. of processed blocks + 71.7 V680-HAM42-PRT: 18.8 × No. of processed blocks + 66.4			–

2-kbyte Memory RF Tags

V680S-D2KF□, V680S-D2KF52M/-D2KF52M-BT□□ (V680-HS□□ Antenna)

Communications time setting	Command	Communications time (ms)			
		4-byte Access Mode	26-byte Access Mode	58-byte Access Mode	V600-compatible mode ✻
Normal	Read	65	92	130	65
	Write with Verification	105	142	219	105
	Data Fill	V680-HAM42-DRT: 17.5 × No. of processed blocks + 89.2 V680-HAM42-PRT: 21.2 × No. of processed blocks + 86.4			–
High speed	Read	61	81	110	–
	Write with Verification	86	124	178	–
	Data Fill	V680-HAM42-DRT: 14.8 × No. of processed blocks + 71.7 V680-HAM42-PRT: 17.2 × No. of processed blocks + 74.6			–

8-kbyte Memory RF Tags

V680S-D8KF□□ (V680-HS□□ Antenna)

Communications time setting	Command	Communications time (ms)			
		4-byte Access Mode	26-byte Access Mode	58-byte Access Mode	V600-compatible mode ✻1
Normal	Read	42	42	60	42
	Write with Verification	133	133	170	133
	Data Fill	V680-HAM42-DRT: 9.1 × No. of processed blocks + 105.5 V680-HAM42-PRT: 9.1 × No. of processed blocks + 105.5			–
High speed ✻2	Read	42	42	60	42
	Write with Verification	133	133	170	133
	Data Fill	V680-HAM42-DRT: 9.1 × No. of processed blocks + 105.5 V680-HAM42-PRT: 9.1 × No. of processed blocks + 105.5			–

✻1. The V680-HAM42-PRT does not support V600-compatible mode.
✻2. When using V680S-D8KF□□ RF Tag, normal-mode communications speed will be used regardless of the high-speed mode setting.

ID Flag Sensors (V680-HAM91/-HAM81)

Operating Mode / RF Tag	Communications time (ms)	
	Read	Write
	Data Read, Verification read	Write, Bit Set, Bit Clear
1-kbyte/2-kbyte Memory RF Tag	43	87
8-kbyte Memory RF Tags	50	84

$$\text{RF Tag travel speed (conveyor speed)} = \frac{\text{Travel distance (D) in interrogation zone}}{\text{Communications time (T)}}$$

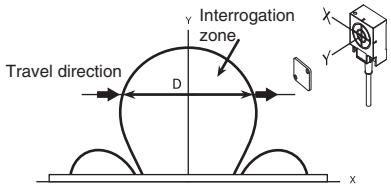

Calculation Example

Read Processing Using Combination of V680-D1KP66T and V680-HS63

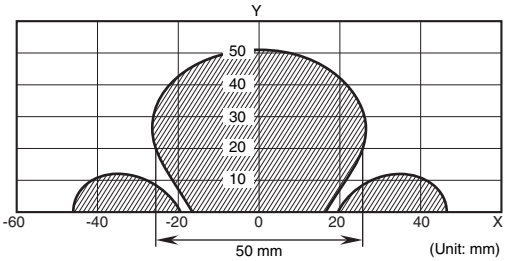

$$\text{RF Tag travel speed (m/min)} = \frac{50\text{(mm)}}{43\text{(ms)}} \fallingdotseq 69\text{(m/min)}$$

Note: 1. The travel speed depends on factors such as the communications distance Y and axis offset. Therefore, it is recommended to refer to the interrogation zone figure and to perform operation using the widest part of the area.
2. The calculated value is a rough guide.
Perform testing with the actual devices before actual operation.
3. This calculation formula does not include communications error processing.

TAT When Using an ID Controller (Reference Values)

TAT (Turn Around Time)

TAT refers to the total time required from the point at which a host device (such as a personal computer) starts sending a command until a response is received.

TAT = Command send time + RF Tag communication time + response

Command send time:	This is the time required for sending a command from the host device to the Controller. It varies depending on the communications speed and format.
RF Tag communication time:	This is the time required for communication between the Antenna and the RF Tag.
Response receipt time:	This is the time required for returning a response from the Controller to the host device. It varies depending on the communications speed and format.

- For an ordinary command



- Expansion Read Command

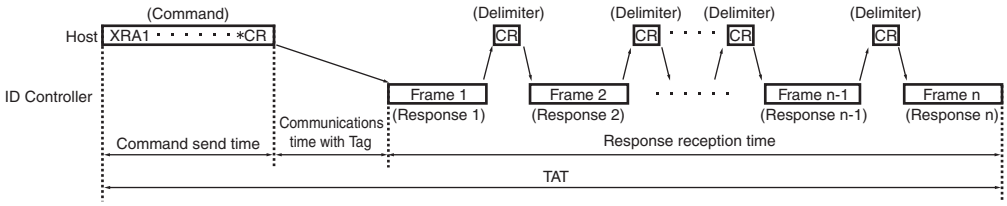

- Expansion Write Command

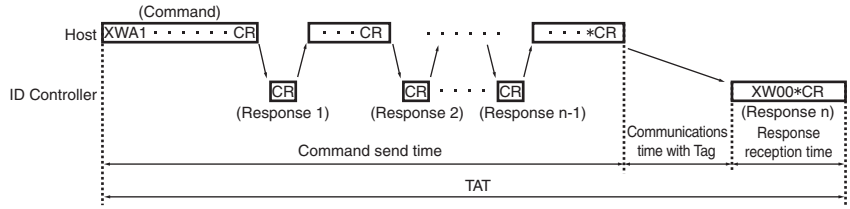

Safety Precautions

⚠ WARNING

This product is not designed or rated for ensuring safety of persons.
Do not use it for such purposes.

✻ This catalog is intended only to help select the appropriate product. Be sure to read the User's Manual for usage precautions prior to using the product.

Precautions for Safe Use

To ensure safety, be sure to follow the following precautions:

1. Do not operate this product in any flammable, explosive, or corrosive gas environment.
2. Do not disassemble, repair, or remodel this product.
3. Tighten the base lock screws and terminal block screws completely.
4. Be sure to use wiring crimp terminals of the specified size.
5. If any cable has a locking mechanism, be sure to check that it has been locked before using it.
6. The DC power supply must be within the specified rating (24 VDC +10%/–15%).
7. Do not reverse the power supply connection.
8. Do not insert water, wire, etc., into any of the gaps in the case. Doing so may cause fire or electric shock.
9. Turn OFF the Controller or ID Sensor Unit power before attaching or removing the Antenna.
10. If multiple Antennas are mounted near each other, communications performance may decrease due to mutual interference. Refer to the manual for the Antennas and RF Tags and check to make sure there is no mutual interference before installation.
11. To remove the ID Controller, catch a tool on the mounting hook and gently remove the Unit.
12. Wire correctly and do not short-circuit the load. The ID Controller may rupture or burn.
13. Do not use in environments that are subject to oil.
14. Never use an AC power supply.
15. In the event that the product exhibits any abnormal condition, immediately stop using the system, turn OFF the power, and contact your OMRON sales representative.
16. Dispose of this product as industrial waste.
17. Be sure to follow any other warnings, cautions, and notices given in this document.

Precautions for Correct Use

Please observe the following precautions to prevent failure to operate, malfunctions, or undesirable effects on product performance.

Installation Site

Install the product at a location where:

- It is not exposed to corrosive gases, dust, metal chips, or salt.
- The ambient operating temperature is within the range stipulated in the specifications.
- There are no sudden variations in temperature (no condensation).
- The ambient operating humidity is within the range stipulated in the specifications.
- No vibration or shock exceeding the values stipulated in the specifications is transmitted directly to the body of the product.
- It is not subject to splashing water, oil, or chemical substances.

Installation

- The product uses the 13.56-MHz frequency band to communicate with RF Tags. Some devices, such as some motors, inverters, and switching power supplies, generate electromagnetic waves (i.e., noise) that can affect communications with RF Tags. If any of these devices are nearby, communications with RF Tags may be affected or RF Tags may be destroyed. If the product is to be used near such devices, check the effects on communications before using the product.
- To minimize the general influence of noise, observe the following precautions:
  1. Ground any metallic material located around this device to 100Ω or less.
  2. Keep the product away from high voltage and heavy current.
- Do not pull on the cable.
- Do not use products that are not waterproof in misty environments.
- Do not subject the products to chemicals that adversely affect product materials.
- When installing the product, tighten screws to the following torque:

Controller:	1.2 N·m max
ID Sensor Unit:	0.4 N·m
V680-HS51 Antenna:	6 N·m
V680-HS52 Antenna:	40 N·m
V680-HS63 Antenna:	1.2 N·m
V680-HS65 Antenna:	1.2 N·m
V680-H01-V2 Antenna:	1.2 N·m
(Attach the enclosed Mounting Brackets)	
V680-D1KP66T/-D1KP66MT:	0.5 N·m
V680-D1KP66T-SP:	1.2 N·m
V680-D1KP54T:	0.3 to 0.5 N·m
V680S-D2KF67/-D2KF67M:	0.6N·m
V680S-D2KF68/-D2KF68M:	1.2N·m
V680S-D8KF67/-D8KF67M:	0.6N·m
V680S-D8KF68/-D8KF68M:	1.2N·m

- Do not pull the Antenna connector over the power of 30 N. The Antenna connector may be broken.
- Transmission will not be possible if the front and back panels are mistakenly reversed and the Unit is mounted to a metallic surface.
  V680S-D2KF67M
  V680S-D2KF68M
- The transmission distance will be reduced when the Unit is not mounted to a metallic surface.
  V680S-D2KF67M
  V680S-D2KF68M
  V680S-D8KF67M
  V680S-D8KF68M
- If multiple Antennas are mounted near each other, communications performance may decrease due to mutual interference. Refer to the User's Manual (Cat. No. Z248) and check to make sure there is no mutual interference.
- Depending on the operating environment, the case surface may become fogged, but basic performance will not be affected.
- When Antenna (only V680-H01-V2) is used in the United States and Canada, the ferrite core (ZCAT3035-1330) of the antenna's attachment is installed on controller's (V680-CA5D01-V□) DC power cable.
- The communications range is adversely affected if there is any metal material around the RF Tag.
- The maximum communications range can be obtained when the Antenna faces the RF tag directly. When the RF tag is installed at a tilt, the communications range is reduced. Consider the effect of the RF tag at tilt when installing the RF Tag.
- Provide the mounting distances between plural RF tags to prevent them from malfunctions due to mutual interference.
- If the central axis of an antenna and RF tag shifts, a communications range will fall.

Communications with Host (V680-HAM91/-HAM81)

The I/O status may be unstable when the ID Controller is started. After turning ON the power supply to the ID Controller, allow at least 1 second to elapse before performing control.

Storage

Store the product at a location where:

- It is not exposed to corrosive gases, dust, metal chips, or salt.
- The ambient storage temperature is within the range stipulated in the specifications.
- There are no sudden variations in temperature (no condensation).
- The ambient storage humidity is within the range stipulated in the specifications.
- No vibration or shock exceeding the values stipulated in the specifications is transmitted directly to the body of the product.
- It is not subject to splashing water, oil, or chemical substances.

Cleaning

Thinners, benzine, acetone, and kerosine may have adverse effects on resin parts and the case coating. Check the resistance to chemicals in the user's manual and do not use chemicals that may affect the product.

Dimensions

(Unit: mm)
Tolerance class IT16 applies to dimensions in this datasheet unless otherwise specified.

RF Tag

V680-D1KP52MT/-D2KF52M



Case material	PPS resin
Filling	Epoxy resin

V680-D1KP53M

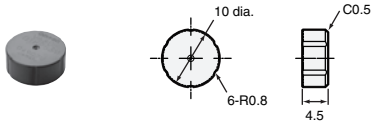

Case material	PPS resin
Filling	Epoxy resin

V680-D1KP54T

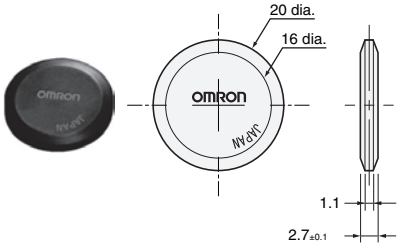

Case material	PPS resin

V680-D1KP66T/-D1KP66MT

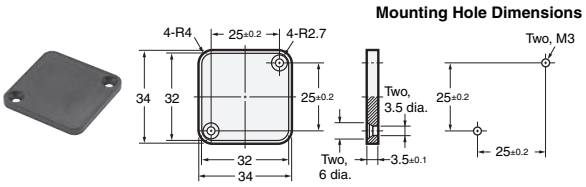

Case material	PPS resin

V680-D1KP66T-SP

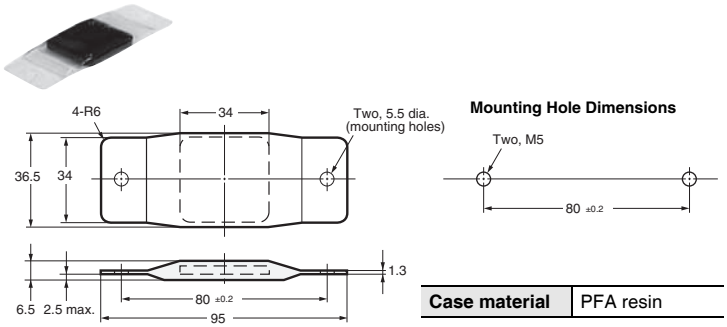

Case material	PFA resin

V680S-D2KF67/-D2KF67M
V680S-D8KF67/-D8KF67M

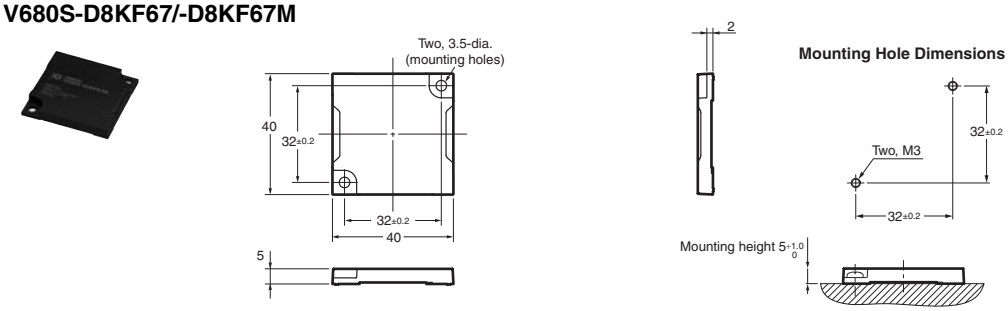

Case material	PPS resin

V680S-D2KF68/-D2KF68M
V680S-D8KF68/-D8KF68M

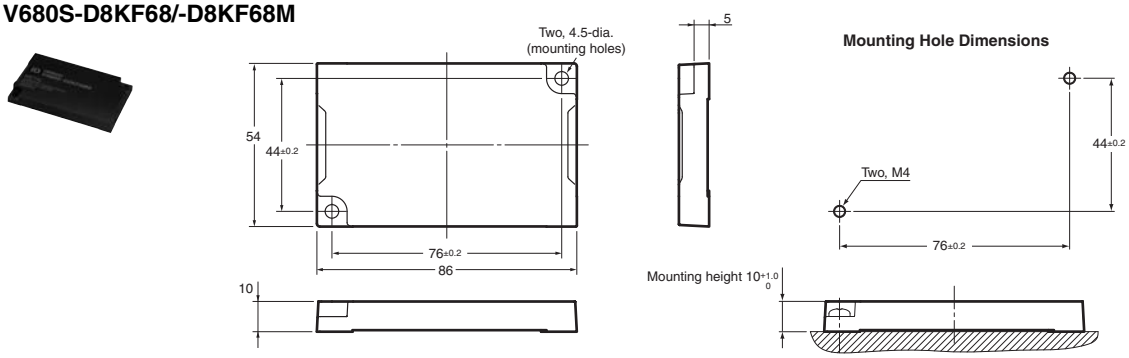

Case material	PPS resin

V680-D1KP58HTN

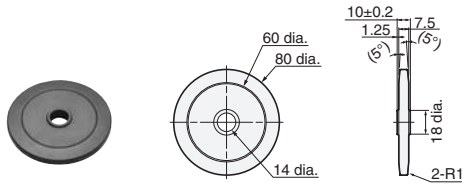

Coating	PPS resin

V680-D1KP52M-BT01
V680-D2KF52M-BT01

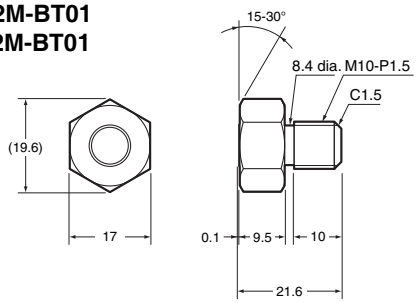

V680-D1KP52M-BT11
V680-D2KF52M-BT11

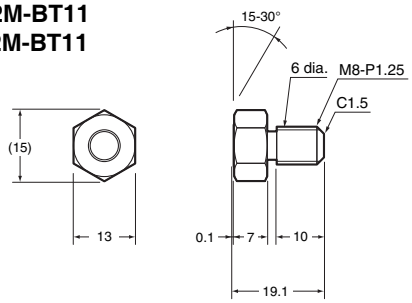

Antenna with Detachable Amplifier Unit

V680-HS52-W

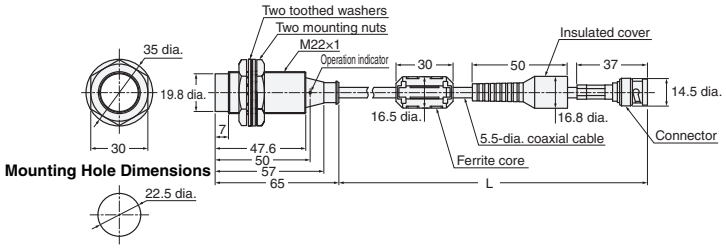

Cable length	L dimension
2 m	2,000 $^{+100}_{-50}$
12.5 m	12,500 $^{+200}_{-50}$

Case material	Brass
Communication surface	ABS resin
Filling	Epoxy resin
Cable	PVC

V680-HS52-R

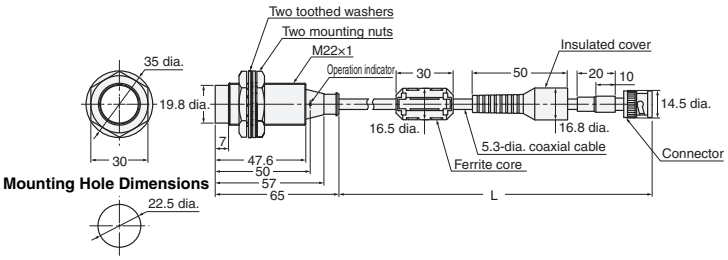

Cable length	L dimension
2 m	2,000 $^{+100}_{-50}$
12.5 m	12,500 $^{+200}_{-50}$

Case material	Brass
Communication surface	ABS resin
Filling	Epoxy resin
Cable	PVC

V680-HS51

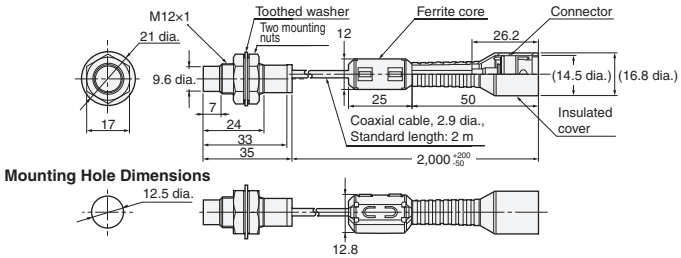

Case material	Brass
Communication surface	ABS resin
Filling	Epoxy resin
Cable	PVC

V680-HS63-W

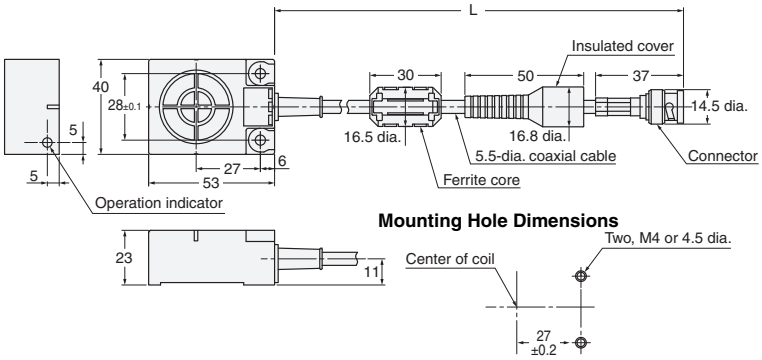

Cable length	L dimension
2 m	2,000 $^{+100}_{-50}$
12.5 m	12,500 $^{+200}_{-50}$

Case material	ABS resin
Filling	Epoxy resin
Cable	PVC

V680-HS63-R

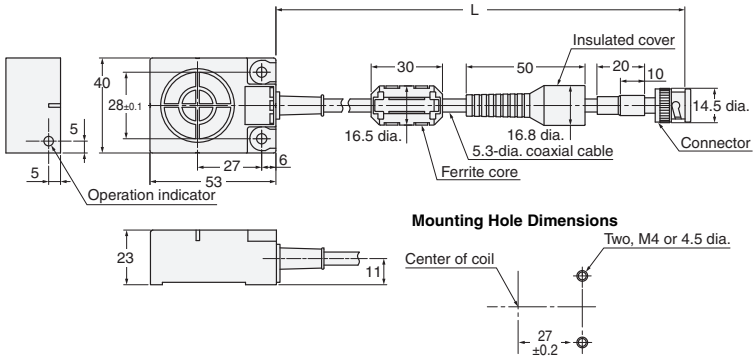

Cable length	L dimension
2 m	2,000 $^{+100}_{-50}$
12.5 m	12,500 $^{+200}_{-50}$

Case material	ABS resin
Filling	Epoxy resin
Cable	PVC

V680-HS65-W

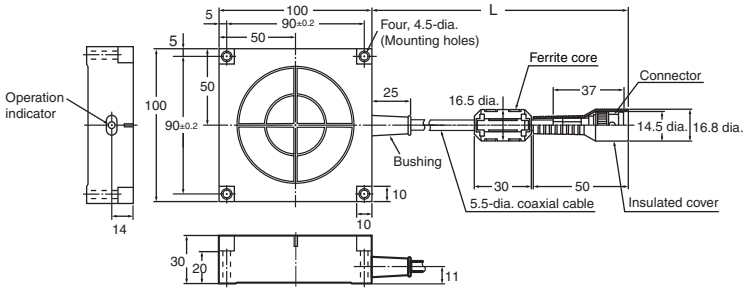

Cable length	L dimension
2 m	2,000 $^{+100}_{-50}$
12.5 m	12,500 $^{+200}_{-50}$

Case material	ABS resin
Filling	Epoxy resin
Cable	PVC (gray)

V680-HS65-R

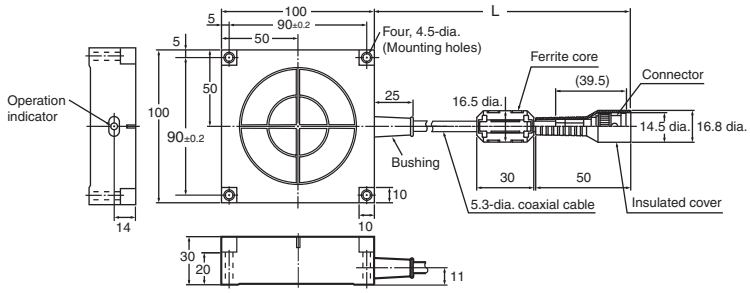

Cable length	L dimension
2 m	2,000 $^{+100}_{-50}$
12.5 m	12,500 $^{+200}_{-50}$

Case material	ABS resin
Filling	Epoxy resin
Cable	PVC (black)

Antenna with Built-in Amplifier Unit

V680-H01-V2

Mounting Hole Dimensions

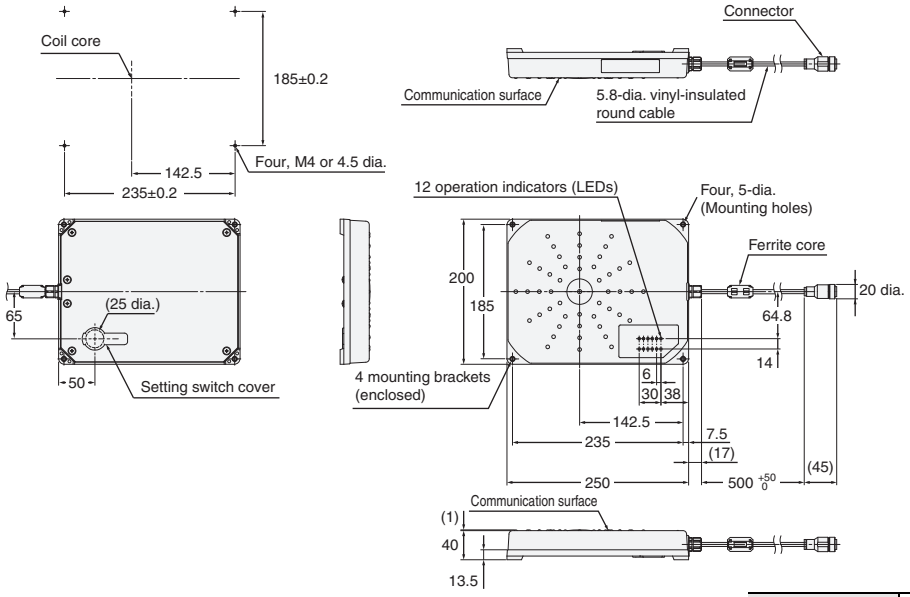

Case material	PC/ASA resin
Filling	Aluminum
Cable	PVC

Amplifier Unit

V680-HA63A/-HA63B

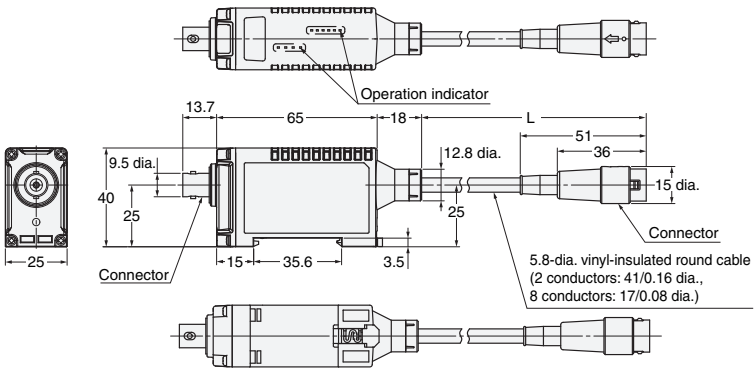

Cable length	L dimension
0.5 m	500 $^{+100}_{-50}$
5 m	5,000 $^{+100}_{-50}$
10 m	10,000 $^{+200}_{-100}$

Case material	PC resin
Filling	Epoxy resin
Cable	PVC

ID Controller

V680-CA5D01-V2/-CA5D02-V2

Mounting Hole Dimensions

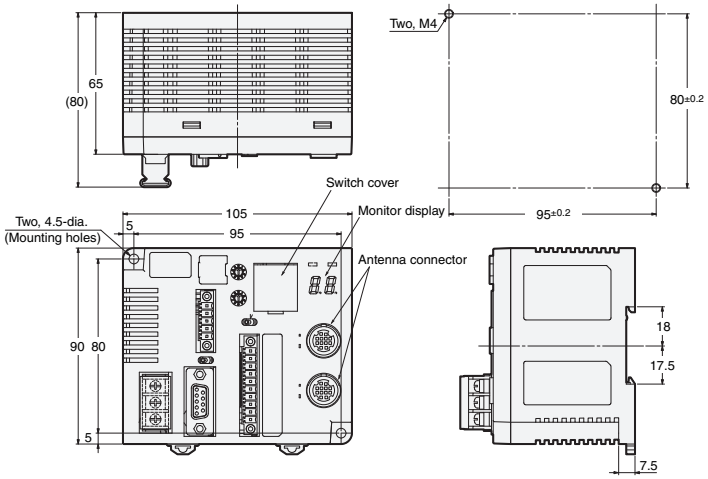

ID Sensor Units

CJ1W-V680C11

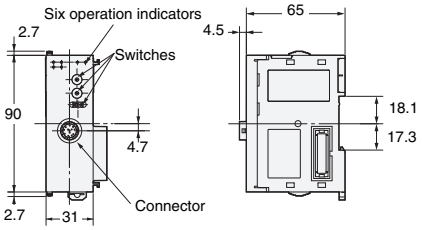

CS1W-V680C11

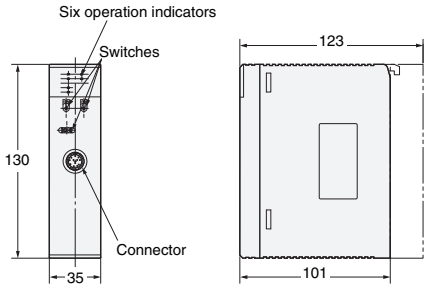

CJ1W-V680C12

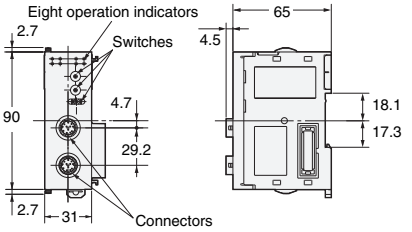

CS1W-V680C12

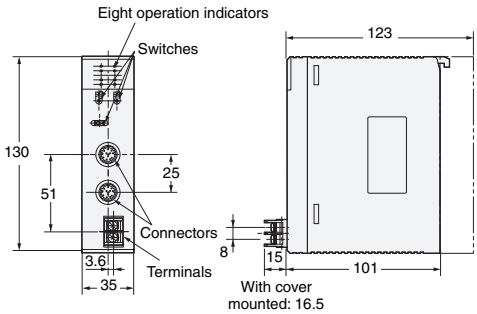

Amplifier-integrated Controller (DeviceNet ID Slave/PROFIBUS ID Slave)

V680-HAM42-DRT

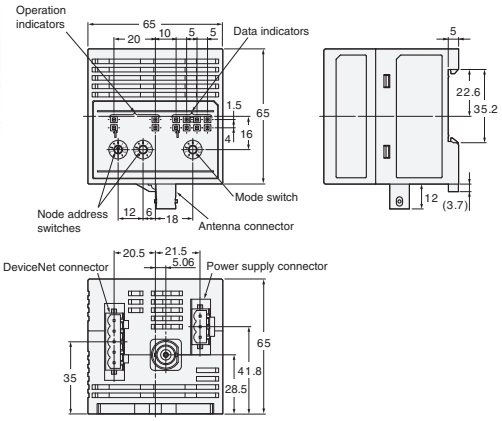

Case material	PC+ABS resin

V680-HAM42-PRT

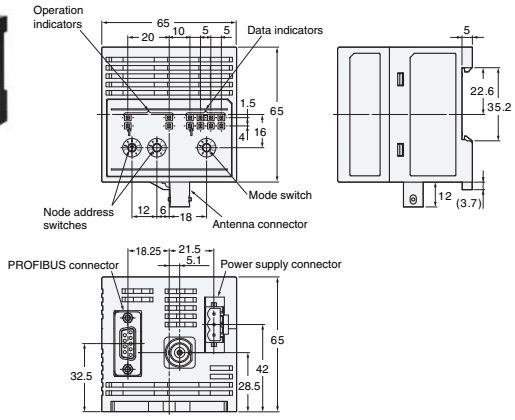

Case material	PC+ABS resin

Amplifier-integrated Controllers (ID Flag Sensors)

V680-HAM91/-HAM81

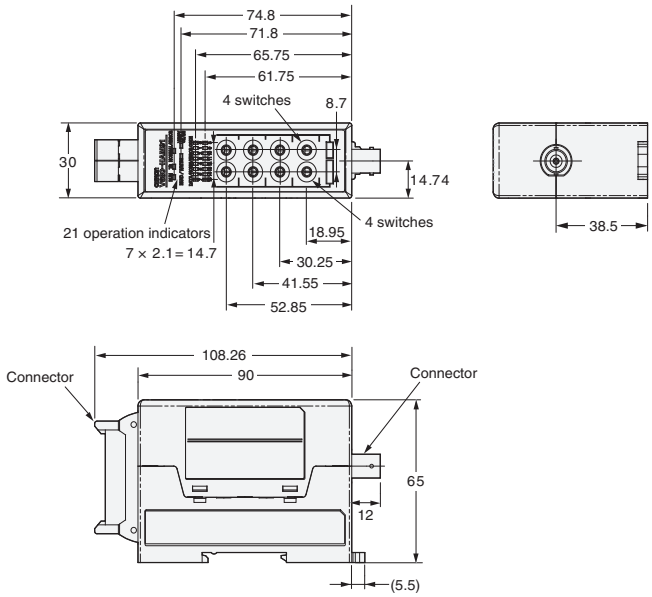

Case material	PC+ABS resin

Handheld Reader Writer

V680-CHUD

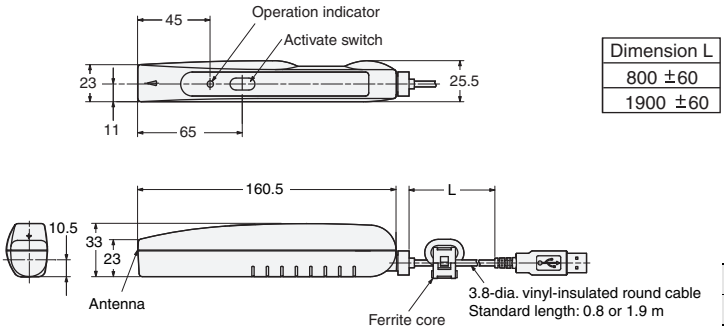

Dimension L
800 ±60
1900 ±60

Case material	ABS resin
Cable	PVC

V680-CH1D

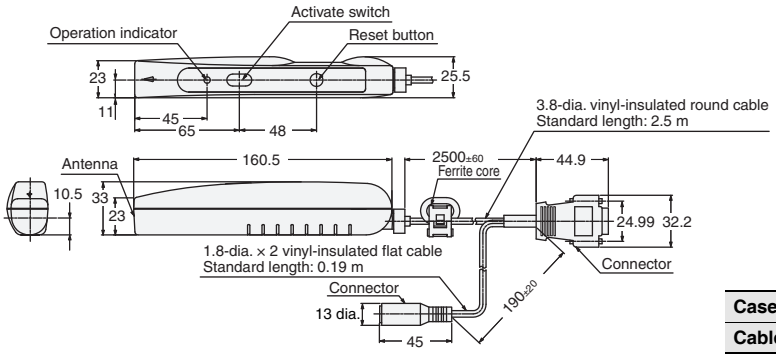

Case material	ABS resin
Cable	PVC

V680-CH1D-PSI

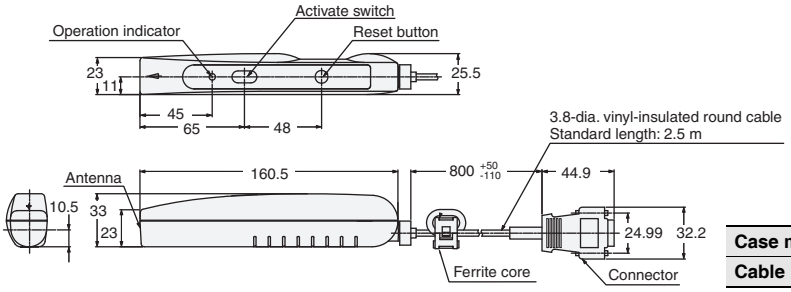

Case material	ABS resin
Cable	PVC

Interface Cables (Sold Separately)

V680-A60 2M/5M/10M

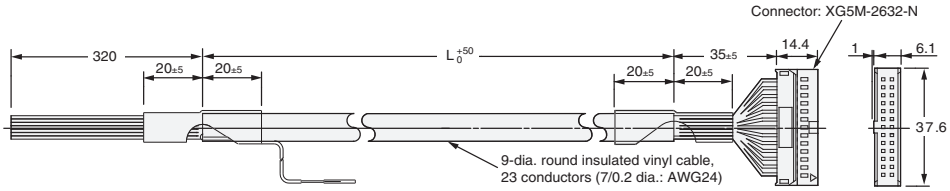

Note: The connectors are not waterproof.

Cable length	L dimension
2 m	2,000
5 m	5,000
10 m	10,000

AC Adapter

V600-A22



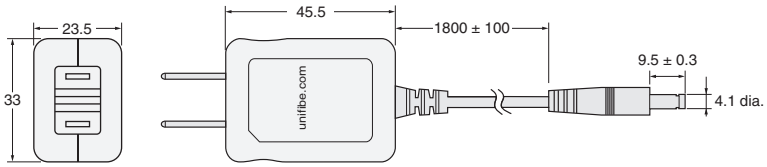

Accessories

V680-D1KP66T Attachments
V600-A86

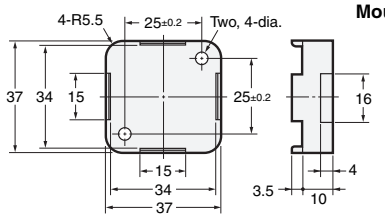

Mounting Hole Dimensions



Case material	PPS resin

V680-D8KF68/-D32KF68 Attachments
V680-A81

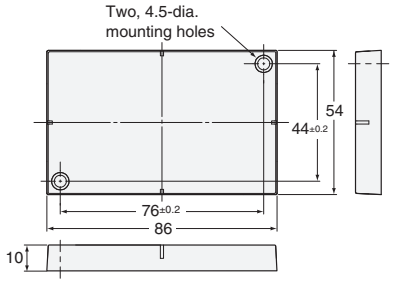

Mounting Hole Dimensions



Case material	PBT resin
Filling	Epoxy resin

V680-D1KP58HTN Attachments
V680-A80

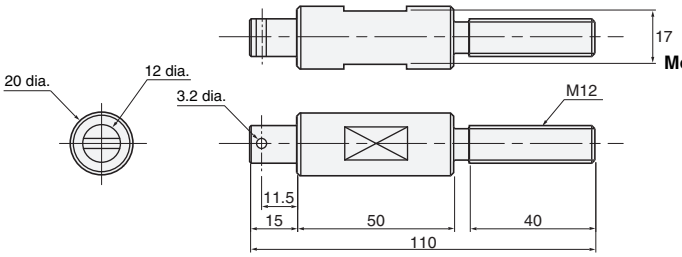

Mounting Hole Dimensions



Material	Stainless steel

V680-D1KP54T Attachments
V700-A80



Mounting Hole Dimensions



Material	PPS resin

Amplifier Unit Special Extension Cable
V700-A40 2M
V700-A41 3M
V700-A42 5M
V700-A43 10M
V700-A44 20M
V700-A45 30M

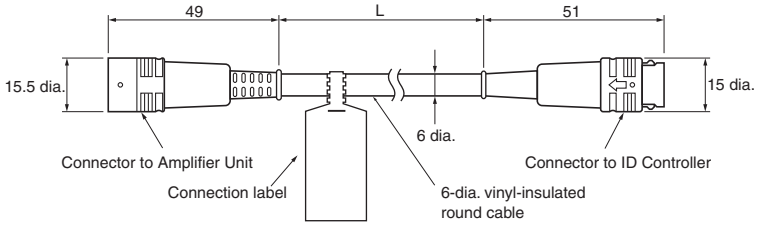

Cable length	L dimension
2 m	2,000±100
3 m	3,000±100
5 m	5,000±100
10 m	10,000±100
20 m	20,000±100
30 m	30,000±100
Material	PVC

V680-H01 Special Cables
V700-A40-W 2M
V700-A40-W 5M
V700-A40-W 10M
V700-A40-W 20M
V700-A40-W 30M

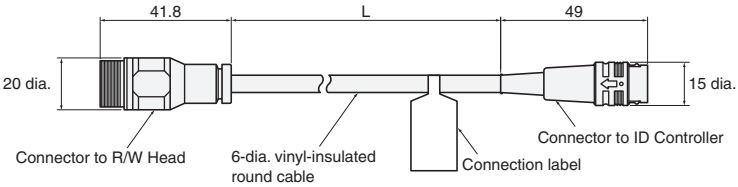

Cable length	L dimension
2 m	2,000±100
5 m	5,000±100
10 m	10,000±100
20 m	20,000±100
30 m	30,000±100
Material	PVC

Related Manuals

Einglish Man.No.	Japanese Man.No.	Model	Name
Z248	SCHI-707	V680-HA63B/HS5□/HS6□/H01-V2/D2KF□□(M)(-BT□1), V680S-D2KF□□(M)/D8KF□□(M)	V680 series Amplifiers/Antennas/RF Tags (FRAM) User's Manual
Z249	SCHI-708	V680-CA5D01-V2/CA5D02-V2	V680 series ID Controller User's Manual
Z262	SCHI-709	V680-HA63A/HS5□/HS□/H01-V2/D1KP□□M(T)(-BT□1)/ D1KP□□T(-SP)/D1KP58HT	V680 series Amplifiers/Antennas/RF Tags (EEPROM) User's Manual
Z271	SCHI-711	CS1W-V680C11/-V680C12, CJ1W-V680C11/-V680C12	CJ/CS series ID Sensor Units User's Manual
Z278	SCHI-714	V680-HAM42-DRT	V680 series DeviceNet ID Slave User's Manual
Z279	SCHI-715	V680-HAM91/HAM81	V680 series ID Flag Sensors User's Manual
Z272	SCHI-712	V680-CHUD/CH1D/CH1D-PSI	V680 series Hand-held Reader Writer User's Manual
Z268	SCHI-710	V680-HAM42-FRT	V680 series FL Remote ID User's Manual
Z320	SDGR-704	V680-HAM42-PRT/HS63-W/HS65-W/D1KP66(M)T/ D1KP58HTN, V680S-D2KF□□(M)/D8KF□□(M)	V680 series PROFIBUS ID Slave User's Manual
Z317	SDGR-703	CJ1W-V680C11/-V680C12	CJ series ID Sensor Units Operation Manual (NJ-series)
Z339	SDGR-709	V680S-HMD64-ETN/HMD66-ETN	V680S series User's Manual

Terms and Conditions Agreement

Read and understand this catalog.
Please read and understand this catalog before purchasing the products. Please consult your OMRON representative if you have any questions or comments.

Warranties.
(a) Exclusive Warranty. Omron's exclusive warranty is that the Products will be free from defects in materials and workmanship for a period of twelve months from the date of sale by Omron (or such other period expressed in writing by Omron). Omron disclaims all other warranties, express or implied.
(b) Limitations. OMRON MAKES NO WARRANTY OR REPRESENTATION, EXPRESS OR IMPLIED, ABOUT NON-INFRINGEMENT, MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE OF THE PRODUCTS. BUYER ACKNOWLEDGES THAT IT ALONE HAS DETERMINED THAT THE
PRODUCTS WILL SUITABLY MEET THE REQUIREMENTS OF THEIR INTENDED USE.
Omron further disclaims all warranties and responsibility of any type for claims or expenses based on infringement by the Products or otherwise of any intellectual property right. (c) Buyer Remedy. Omron's sole obligation hereunder shall be, at Omron's election, to (i) replace (in the form originally shipped with Buyer responsible for labor charges for removal or replacement thereof) the non-complying Product, (ii) repair the non-complying Product, or (iii) repay or credit Buyer an amount equal to the purchase price of the non-complying Product; provided that in no event shall Omron be responsible for warranty, repair, indemnity or any other claims or expenses regarding the Products unless Omron's analysis confirms that the Products were properly handled, stored, installed and maintained and not subject to contamination, abuse, misuse or inappropriate modification. Return of any Products by Buyer must be approved in writing by Omron before shipment. Omron Companies shall not be liable for the suitability or unsuitability or the results from the use of Products in combination with any electrical or electronic components, circuits, system assemblies or any other materials or substances or environments. Any advice, recommendations or information given orally or in writing, are not to be construed as an amendment or addition to the above warranty.
See http://www.omron.com/global/ or contact your Omron representative for published information.

Limitation on Liability; Etc.
OMRON COMPANIES SHALL NOT BE LIABLE FOR SPECIAL, INDIRECT, INCIDENTAL, OR CONSEQUENTIAL DAMAGES, LOSS OF PROFITS OR PRODUCTION OR COMMERCIAL LOSS IN ANY WAY CONNECTED WITH THE PRODUCTS, WHETHER SUCH CLAIM IS BASED IN CONTRACT, WARRANTY, NEGLIGENCE OR STRICT LIABILITY.
Further, in no event shall liability of Omron Companies exceed the individual price of the Product on which liability is asserted.

Suitability of Use.
Omron Companies shall not be responsible for conformity with any standards, codes or regulations which apply to the combination of the Product in the Buyer's application or use of the Product. At Buyer's request, Omron will provide applicable third party certification documents identifying ratings and limitations of use which apply to the Product. This information by itself is not sufficient for a complete determination of the suitability of the Product in combination with the end product, machine, system, or other application or use. Buyer shall be solely responsible for determining appropriateness of the particular Product with respect to Buyer's application, product or system. Buyer shall take application responsibility in all cases.
NEVER USE THE PRODUCT FOR AN APPLICATION INVOLVING SERIOUS RISK TO LIFE OR PROPERTY OR IN LARGE QUANTITIES WITHOUT ENSURING THAT THE SYSTEM AS A WHOLE HAS BEEN DESIGNED TO ADDRESS THE RISKS, AND THAT THE OMRON PRODUCT(S) IS PROPERLY RATED AND INSTALLED FOR THE INTENDED USE WITHIN THE OVERALL EQUIPMENT OR SYSTEM.

Programmable Products.
Omron Companies shall not be responsible for the user's programming of a programmable Product, or any consequence thereof.

Performance Data.
Data presented in Omron Company websites, catalogs and other materials is provided as a guide for the user in determining suitability and does not constitute a warranty. It may represent the result of Omron's test conditions, and the user must correlate it to actual application requirements. Actual performance is subject to the Omron's Warranty and Limitations of Liability.

Change in Specifications.
Product specifications and accessories may be changed at any time based on improvements and other reasons. It is our practice to change part numbers when published ratings or features are changed, or when significant construction changes are made. However, some specifications of the Product may be changed without any notice. When in doubt, special part numbers may be assigned to fix or establish key specifications for your application. Please consult with your Omron's representative at any time to confirm actual specifications of purchased Product.

Errors and Omissions.
Information presented by Omron Companies has been checked and is believed to be accurate; however, no responsibility is assumed for clerical, typographical or proofreading errors or omissions.

2017.6

In the interest of product improvement, specifications are subject to change without notice.

OMRON Corporation
Industrial Automation Company

http://www.ia.omron.com/

(c)Copyright OMRON Corporation 2017 All Right Reserved.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Omron:
V680S-A40 50M V680S-HMD66-ETN V680S-A40 10M V680S-HMD64-ETN V680S-A41 10M V680S-A41 5M V680S-A40 20M V680S-A41 2M V680S-D2KF68 V680S-HMD63-EIP