
3-TERMINALS 0.5A POSITIVE VOLTAGE REGULATOR

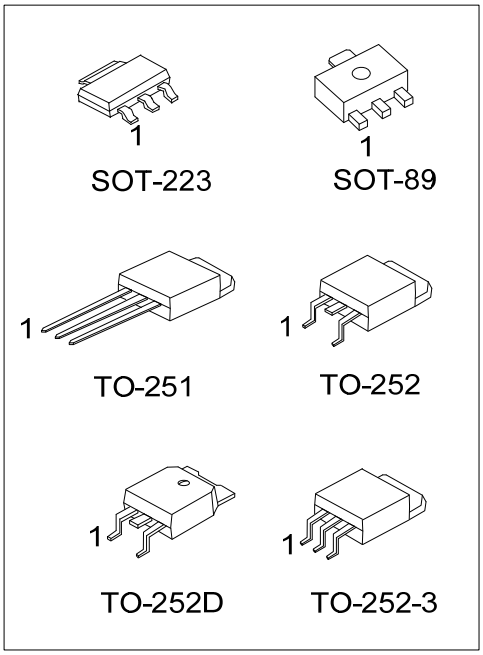

■ DESCRIPTION

The UTC **78DXXL** family is monolithic fixed voltage regulator integrated circuit. They are suitable for applications that required supply current up to 0.5 A.

■ FEATURE

* Output Current Up To 0.5 A
* Fixed Output Voltage of 5V, 6V, 7V, 8V, 9V, 10V, 12V, 15V and 18V
  Available
* Thermal Overload Shutdown Protection
* Short Circuit Current Limiting
* Output Transistor SOA Protection

■ ORDERING INFORMATION




Ordering Number		Package	Pin Assignment			Packing
Lead Free	Halogen Free		1	2	3	
78DXXLL-AA3-R	78DXXLG-AA3-R	SOT-223	I	G	O	Tape Reel
78DXXLL-AB3-B-R	78DXXLG-AB3-B-R	SOT-89	O	G	I	Tape Reel
78DXXLL-TM3-T	78DXXLG-TM3-T	TO-251	I	G	O	Tube
78DXXLL-TN3-R	78DXXLG-TN3-R	TO-252	I	G	O	Tape Reel
78DXXLL-TNA-R	78DXXLG-TNA-R	TO-252-3	I	G	O	Tape Reel
78DXXLL-TND-R	78DXXLG-TND-R	TO-252D	I	G	O	Tape Reel

Note: 1. XX: Output Voltage, refer to Marking Information
2. Pin Code: I: Input G: GND O: Output


78DXXLG-AB3-B-R (1)Packing Type (2)Pin Assignment (3)Package Type (4)Green Package (5)Output Voltage Code	(1) R: Tape Reel, T: Tube (2) refer to Pin Assignment (3) AA3: SOT-223, AB3: SOT-89, TM3: TO-251, TN3: TO-252, TNA: TO-252-3, TND: TO-252D (4) G: Halogen Free and Lead Free, L: Lead Free (5) XX: refer to Marking Information

Copyright © 2025 Unisonic Technologies Co., Ltd


■ MARKING INFORMATION

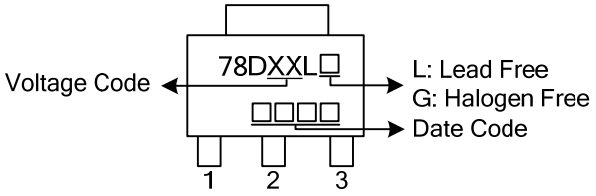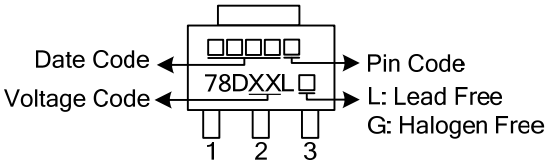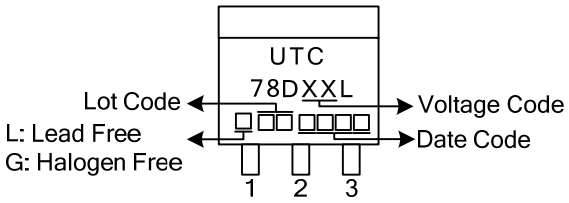PACKAGE	VOLTAGE CODE	MARKING
SOT-223	05: 5V 06: 6V 07: 7V 08: 8V 09: 9V 10: 10V 12: 12V 15: 15V 18: 18V	
SOT-89		
TO-251 TO-252 TO-252-3 TO-252D		

■ BLOCK DIAGRAM

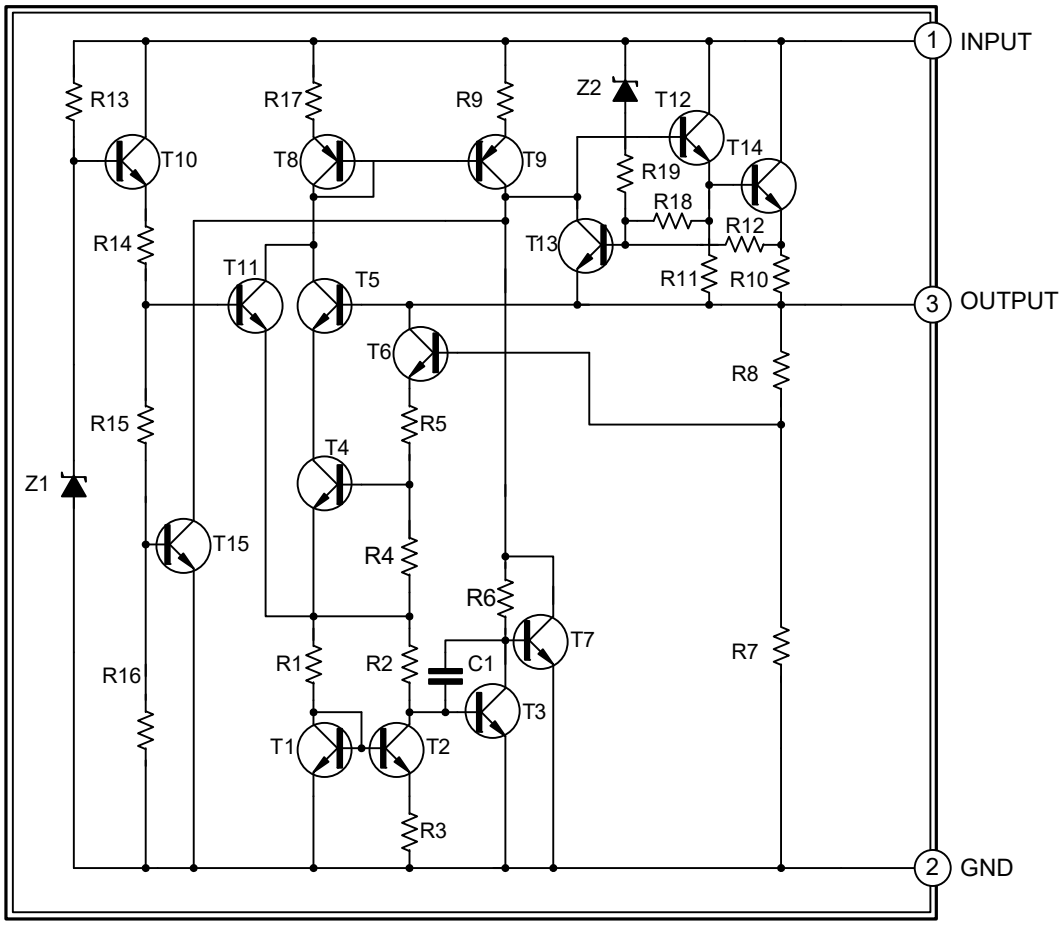

■ TYPICAL APPLICATION CIRCUIT

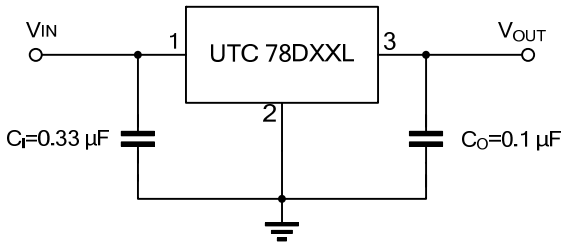

Note: Bypass capacitors are recommended for optimum stability and transient response and should be located as close as possible to the regulators.

■ ABSOLUTE MAXIMUM RATINGS (T_J=25°C, unless otherwise specified)

PARAMETER		SYMBOL	RATINGS	UNIT
Input Voltage		V_{IN}	35	V
Output Current		I_{OUT}	0.5	A
Power Dissipation (T_C=25°C)	SOT-223	P_D	606	mW
	SOT-89		555	mW
	TO-251/TO-252 TO-252-3/TO-252D		890	mW
Junction Temperature		T_J	+150	°C
Operating Temperature		T_{OPR}	-40 ~ +125	°C
Storage Temperature		T_{STG}	-55 ~ +150	°C

Note: Absolute maximum ratings are those values beyond which the device could be permanently damaged. Absolute maximum ratings are stress ratings only and functional device operation is not implied.

■ THERMAL DATA

PARAMETER		SYMBOL	RATINGS	UNIT
Junction to Ambient	SOT-223	θ_{JA}	165	°C/W
	SOT-89		180	°C/W
	TO-251/TO-252 TO-252-3/TO-252D		112	°C/W
Junction to Case	SOT-223	θ_{JC}	15	°C/W
	SOT-89		50	°C/W
	TO-251/TO-252 TO-252-3/TO-252D		12	°C/W

■ ELECTRICAL CHARACTERISTICS

(T_J=25°C, C_I=0.33μF, C_O=0.1μF, P_D≤7W, unless otherwise specified)

For 78D05L (V_{IN}=10V, I_{OUT}=0.5A)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Output Voltage	V_{OUT}	I_{OUT}=5mA~0.5A	4.90	5.0	5.10	V
		V_{IN} =7.5~20V, I_{OUT}=5mA~0.5A	4.85		5.15	V
Load Regulation	ΔV_{OUT}	I_{OUT}=5mA~0.5A			100	mV
		I_{OUT}=5mA~200mA			50	mV
Line Regulation	ΔV_{OUT}	V_{IN} =7V~25V			100	mV
		V_{IN} =7.5~20V, I_{OUT}=0.5A			100	mV
Quiescent Current	I_Q	I_{OUT}=0.5A			8	mA
Quiescent Current Change	ΔI_Q	V_{UT} =7.5~20V			1	mA
		I_{OUT}=5mA~0.5A			0.5	mA
Output Noise Voltage	e_N	10Hz≤f≤100kHz		40		μV
Ripple Rejection	RR	V_{IN} =8~18V,f=120Hz	59	80		dB
Peak Output Current	I_{PEAK}			1.2		A
Short-Circuit Current	I_{SC}	V_{IN}=V_{OUT}+19V		250		mA
Dropout Voltage	V_D			2		V

■ ELECTRICAL CHARACTERISTICS (Cont.)

For 78D06L (V_{IN}=11V, I_{OUT}=0.5A)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Output Voltage	V_{OUT}	I_{OUT}=5mA~0.5A	5.88	6.0	6.12	V
		V_{IN}=8.5~21V,I_{OUT}=5mA~0.5A	5.82		6.18	V
Load Regulation	ΔV_{OUT}	I_{OUT}=5mA~0.5A			120	mV
		I_{OUT}=5mA~200mA			60	mV
Line Regulation	ΔV_{OUT}	V_{IN}=8~25V			120	mV
		V_{IN}=8.5~21V, I_{OUT}=0.5A			120	mV
Quiescent Current	I_Q	I_{OUT}=0.5A			8	mA
Quiescent Current Change	ΔI_Q	V_{IN} =8.5~21V			1	mA
		I_{OUT}=5mA~0.5A			0.5	mA
Output Noise Voltage	e_N	10Hz≤f≤100kHz		45		μV
Ripple Rejection	RR	V_{IN} =9~19V,f=120Hz	56	75		dB
Peak Output Current	I_{PEAK}			1.2		A
Short-Circuit Current	I_{SC}	V_{IN}=V_{OUT}+19V		250		mA
Dropout Voltage	V_D			2		V

For 78D07L (V_{IN}=13V, I_{OUT}=0.5A)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Output Voltage	V_{OUT}	I_{OUT}=5mA~0.5A	6.86	7.0	7.14	V
		V_{IN}=9.5~22V,I_{OUT}=5mA~0.5A	6.79		7.21	V
Load Regulation	ΔV_{OUT}	I_{OUT}=5mA~0.5A			140	mV
		I_{OUT}=5mA~200mA			70	mV
Line Regulation	ΔV_{OUT}	V_{IN}=10.5~25V			140	mV
		V_{IN}=10.5~23V, I_{OUT}=0.5A			140	mV
Quiescent Current	I_Q	I_{OUT}=0.5A			8	mA
Quiescent Current Change	ΔI_Q	V_{IN} =10.5~23V			1	mA
		I_{OUT}=5mA~0.5A			0.5	mA
Output Noise Voltage	eN	10Hz≤f≤100kHz		50		μV
Ripple Rejection	RR	V_{IN} =10.5V~20.5V, f=120Hz	56	75		dB
Peak Output Current	I_{PEAK}			1.2		A
Short-Circuit Current	I_{SC}	V_{IN}=V_{OUT}+19V		250		mA
Dropout Voltage	V_D			2		V

For 78D08L (V_{IN}=14V, I_{OUT}=0.5A)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Output Voltage	V_{OUT}	I_{OUT}=5mA~0.5A	7.84	8.0	8.16	V
		V_{IN}=10.5~23V, I_{OUT}=5mA~0.5A	7.76		8.24	V
Load Regulation	ΔV_{OUT}	I_{OUT}=5mA~0.5A			160	mV
		I_{OUT}=5mA~200mA			80	mV
Line Regulation	ΔV_{OUT}	V_{IN} =10.5~25V			160	mV
		V_{IN} =10.5~23V, I_{OUT}=0.5A			160	mV
Quiescent Current	I_Q	I_{OUT}=0.5A			8	mA
Quiescent Current Change	ΔI_Q	V_{IN} =10.5~23V			1	mA
		I_{OUT}=5mA~0.5A			0.5	mA
Output Noise Voltage	e_N	10Hz≤f≤100kHz		58		μV
Ripple Rejection	RR	V_{IN} =11.5~21.5V, f=120Hz	53	72		dB
Peak Output Current	I_{PEAK}			1.2		A
Short-Circuit Current	I_{SC}	V_{IN}=V_{OUT}+19V		250		mA
Dropout Voltage	V_D			2		V

■ ELECTRICAL CHARACTERISTICS (Cont.)

For 78D09L (V_{IN}=15V, I_{OUT}=0.5A)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Output Voltage	V_{OUT}	I_{OUT}=5mA~0.5A	8.82	9.0	9.18	V
		V_{IN} =11.5~24V,I_{OUT}=5mA~0.5A	8.73		9.27	V
Load Regulation	ΔV_{OUT}	I_{OUT}=5mA~0.5A			180	mV
		I_{OUT}=5mA~200mA			90	mV
Line Regulation	ΔV_{OUT}	V_{IN} =11.5~25V			180	mV
		V_{IN} =11.5~24V, I_{OUT}=0.5A			180	mV
Quiescent Current	I_Q	I_{OUT}=0.5A			8	mA
Quiescent Current Change	ΔI_Q	V_{IN}=11.5~24V			1	mA
		I_{OUT}=5mA~0.5A			0.5	mA
Output Noise Voltage	e_N	10Hz≤f≤100kHz		58		μV
Ripple Rejection	RR	V_{IN}=12.5~22.5V,f=120Hz	53	72		dB
Peak Output Current	I_{PEAK}			1.2		A
Short-Circuit Current	I_{SC}	V_{IN}=V_{OUT}+19V		250		mA
Dropout Voltage	V_D			2		V

For 78D10L (V_{IN} =16V, I_{OUT} =0.5A)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Output Voltage	V_{OUT}	I_{OUT}=5mA~0.5A	9.8	10	10.2	V
		V_{IN}=12.5~25V, I_{OUT} =5mA~0.5A	9.7		10.3	V
Load Regulation	ΔV_{OUT}	I_{OUT}=5mA~0.5A			200	mV
		I_{OUT}=5mA~200mA			100	mV
Line Regulation	ΔV_{OUT}	V_{IN}=12.5~25V			200	mV
		V_{IN}=12.5~25V, I_{OUT} =0.5A			200	mV
Quiescent Current	I_Q	I_{OUT}=0.5A			8.0	mA
Quiescent Current Change	ΔI_Q	V_{IN} =12.6V~25V			1	mA
		I_{OUT}=5mA~0.5A			0.5	mA
Output Noise Voltage	eN	10Hz≤f≤100kHz		58		μV
Ripple Rejection	RR	V_{IN} =13.5~23.5V, f=120Hz	53	72		dB
Peak Output Current	I_{PEAK}			1.2		A
Short-Circuit Current	I_{SC}	V_{IN}=V_{OUT}+19V		250		mA
Dropout Voltage	V_D			2		V

For 78D12L (V_{IN}=19V, I_{OUT}=0.5A)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Output Voltage	V_{OUT}	I_{OUT}=5mA~0.5A	11.76	12	12.24	V
		V_{IN} =14.5~27V,I_{OUT}=5mA~0.5A	11.64		12.36	V
Load Regulation	ΔV_{OUT}	I_{OUT}=5mA~0.5A			240	mV
		I_{OUT}=5mA~200mA			120	mV
Line Regulation	ΔV_{OUT}	V_{IN}=14.5~30V			240	mV
		V_{IN}=14.6~27V, I_{OUT}=0.5A			240	mV
Quiescent Current	I_Q	I_{OUT}=0.5A			8	mA
Quiescent Current Change	ΔI_Q	V_{IN} =14.5~30V			1	mA
		I_{OUT}=5mA~0.5A			0.5	mA
Output Noise Voltage	e_N	10Hz≤f≤100kHz		75		μV
Ripple Rejection	RR	V_{IN} =15~25V, f=120Hz	52	72		dB
Peak Output Current	I_{PEAK}			1.2		A
Short-Circuit Current	I_{SC}	V_{IN}=V_{OUT}+19V		250		mA
Dropout Voltage	V_D			2		V

■ ELECTRICAL CHARACTERISTICS (Cont.)

For 78D15L (V_{IN}=23V, I_{OUT}=0.5A, C_I =0.33μF, C_O=0.1μF,)


PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Output Voltage	V_{OUT}	I_{OUT}=5mA~0.5A	14.70	15	15.30	V
		V_{IN} =17.5~30V, I_{OUT}=5mA~0.5A	14.55		15.45	V
Load Regulation	ΔV_{OUT}	I_{OUT}=5mA~0.5A			300	mV
		I_{OUT}=5mA~200mA			150	mV
Line Regulation	ΔV_{OUT}	V_{IN}=18.5~30V			300	mV
		V_{IN}=17.5~30V, I_{OUT}=0.5A			300	mV
Quiescent Current	I_Q	I_{OUT}=0.5A			8	mA
Quiescent Current Change	ΔI_Q	V_{IN}=17.5~30V			1	mA
		I_{OUT}=5mA~0.5A			0.5	mA
Output Noise Voltage	e_N	10Hz≤f≤100kHz		90		μV
Ripple Rejection	RR	V_{IN}=18.5~28.5V, f=120Hz	51	70		dB
Peak Output Current	I_{PEAK}			1.2		A
Short-Circuit Current	I_{SC}	V_{IN}=V_{OUT}+19V		250		mA
Dropout Voltage	V_D			2		V

For 78D18L (V_{IN}=27V, I_{OUT}=0.5A)


PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Output Voltage	V_{OUT}	I_{OUT}=5mA~0.5A	17.64	18	18.36	V
		V_{IN}=21~33V,I_{OUT}=5mA~0.5A	17.46		18.54	V
Load Regulation	ΔV_{OUT}	I_{OUT}=5mA~0.5A			360	mV
		I_{OUT}=5mA~200mA			180	mV
Line Regulation	ΔV_{OUT}	V_{IN}=21~33V			360	mV
		V_{IN}=21~33V, I_{OUT} =0.5A			360	mV
Quiescent Current	I_Q	I_{OUT}=0.5A			8	mA
Quiescent Current Change	ΔI_Q	V_{IN}=21.5~33V			1	mA
		I_{OUT}=5mA~0.5A			0.5	mA
Output Noise Voltage	e_N	10Hz≤f≤100kHz		110		μV
Ripple Rejection	RR	V_{IN} =22~32V,f=120Hz	50	69		dB
Peak Output Current	I_{PEAK}			1.2		A
Short-Circuit Current	I_{SC}	V_{IN}= 35V		250		mA
Dropout Voltage	V_D			2		V

■ TYPICAL CHARACTERISTICS


Output Voltage vs. Input Voltage

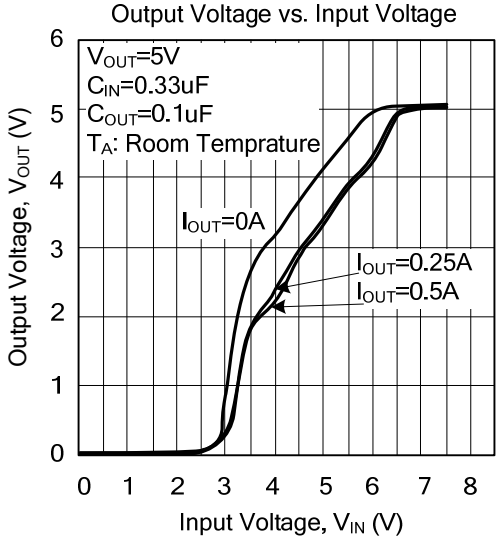


Circuit Operating Current vs. Input Voltage

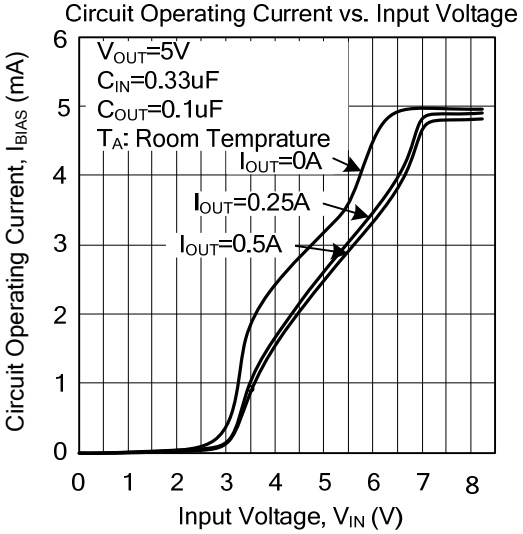


Bias Current vs. Junction Temperature

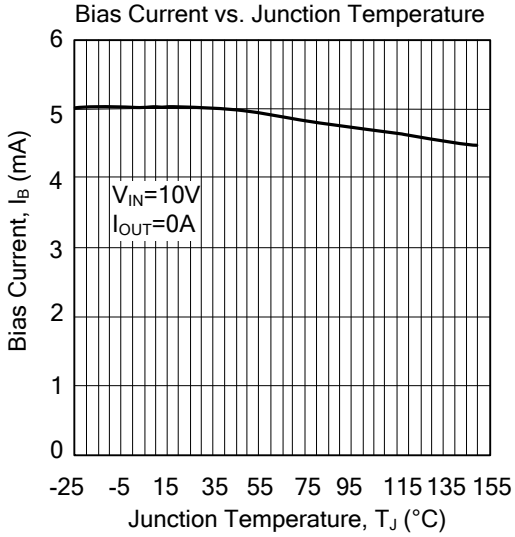


Output Voltage vs. Junction Temperature

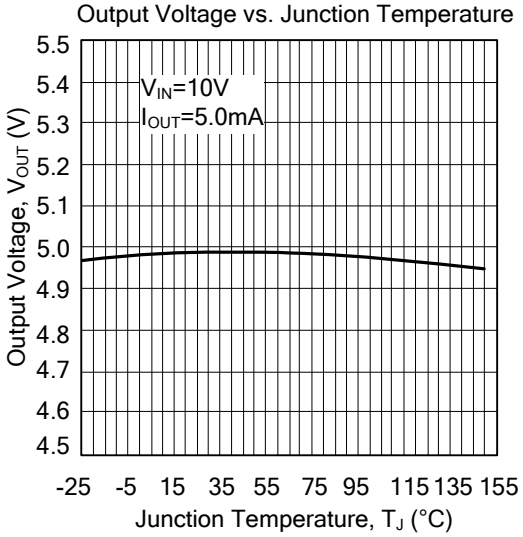

Dropout Voltage vs. Junction Temperature

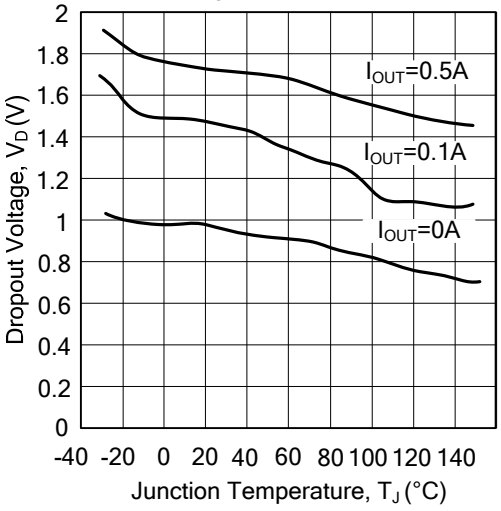

Short Current vs. Input Voltage

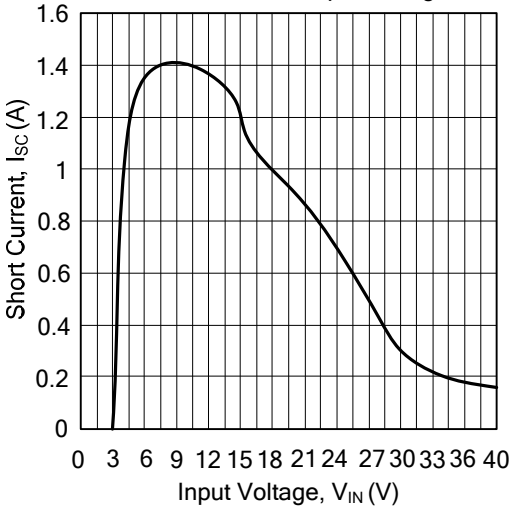

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. UTC reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.