


Static Electricity Prevention Equipment

Antistatic
Equipment

**Don't charge
static
electricity**
(Conductivity)

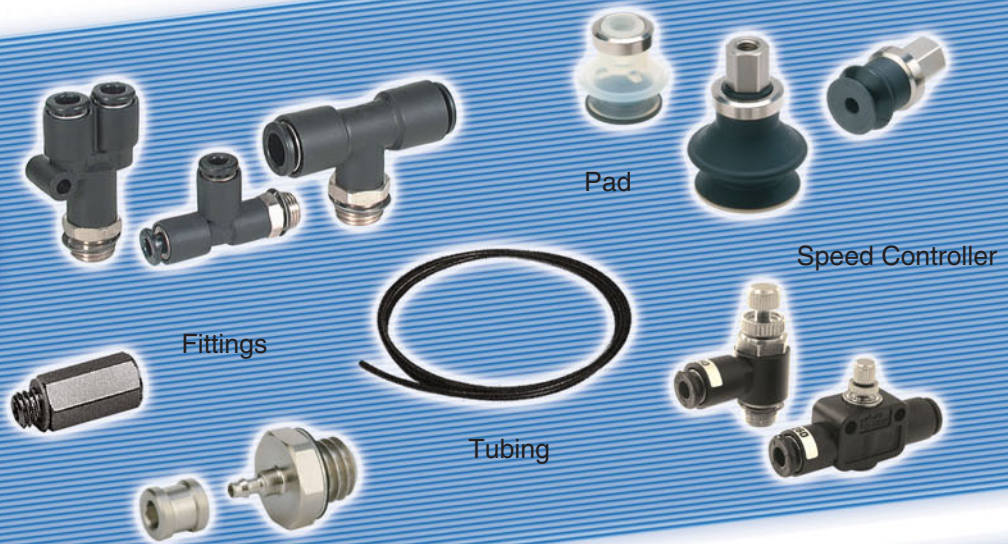

Electrostatic
Removal Equipment


**Neutralizes
static
electricity**
(Electrostatic
removal)



Ionizer

Measurement
Equipment

Confirms
(Confirmation)

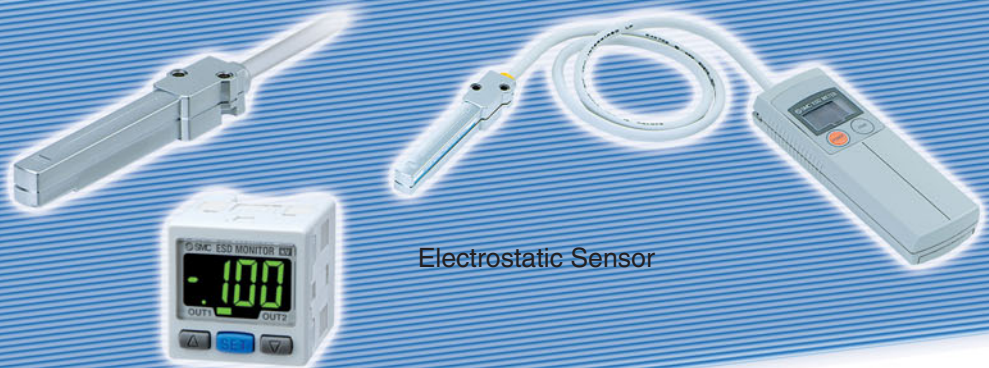


Electrostatic Sensor

SMC eliminates a variety of static

**Prevents
adhesion of foreign
materials such as dust.
(Dust or particle removal)**



**Prevents
electrostatic breakdown
of electric parts.
(ESD)**

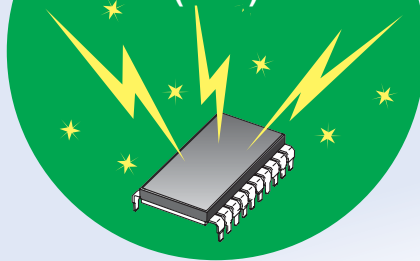

**Prevents
discomfort due
to electric shock.
(Electric shock)**



Measurement Equipment (Handheld)

**Confirming electrostatic charge
and removal of electricity**


Handheld Electrostatic Meter P.27

Static Neutralization Equipment

Static neutralization by ionizer

Ionizer P.18

Related Equipment P.24

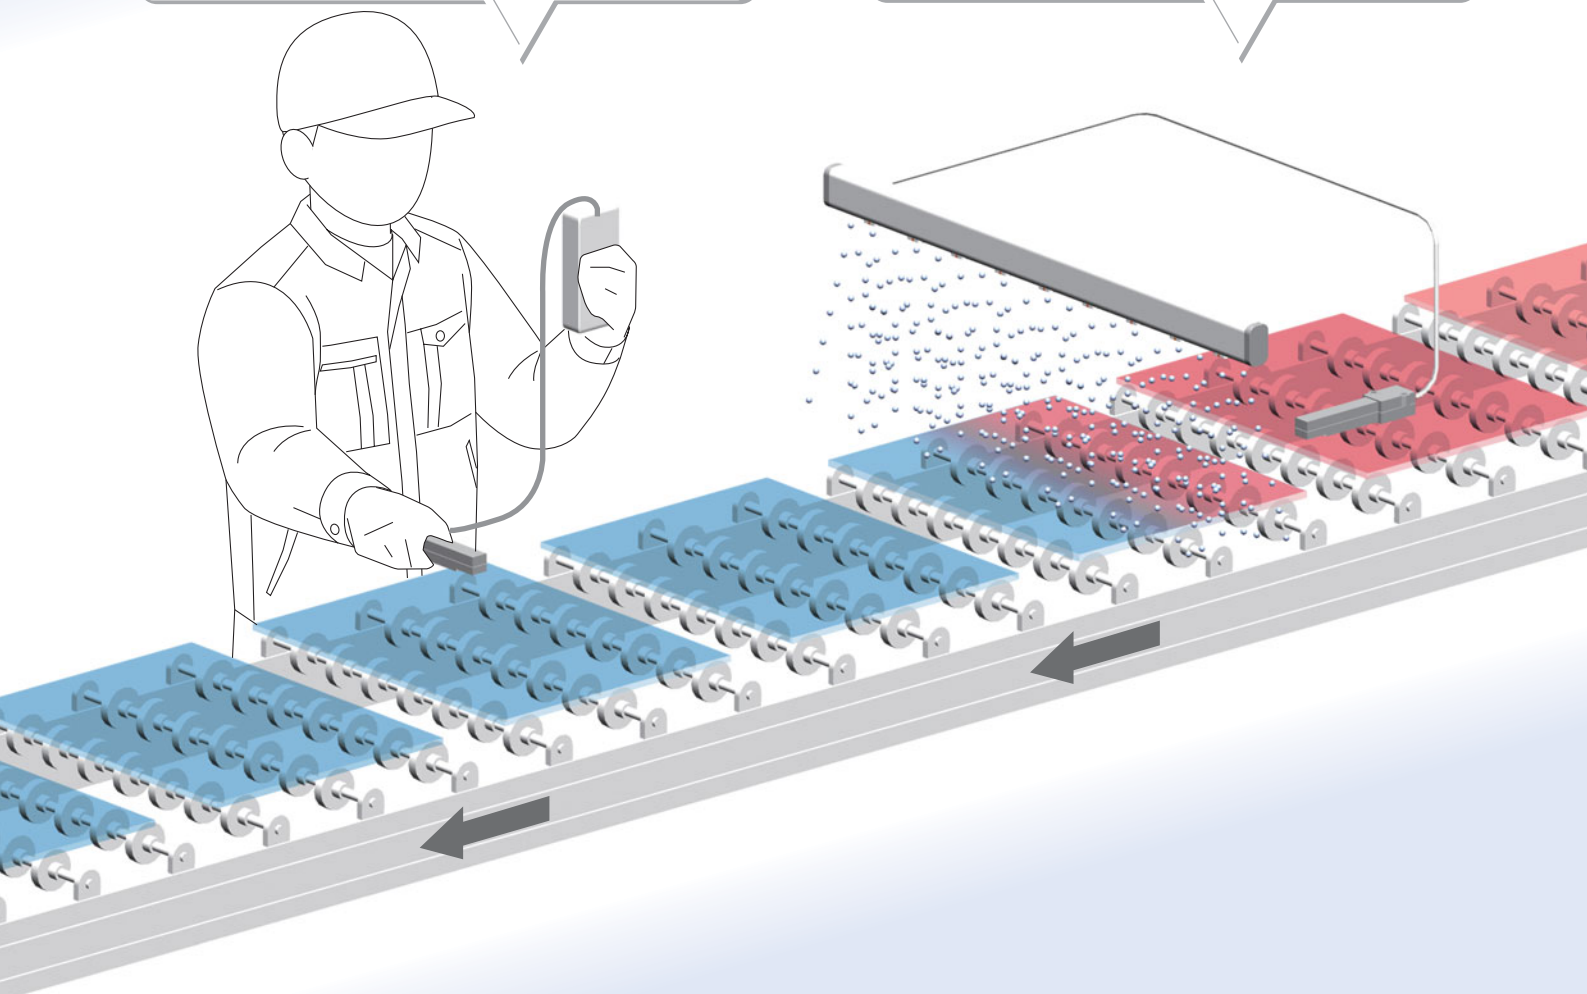


electricity generated problems.

Antistatic Equipment

Fittings P.3
Tubing P.8

Speed Controller
with One-touch Fitting P.10

Vacuum Pad P.12
Antistatic Air Cylinder P.17

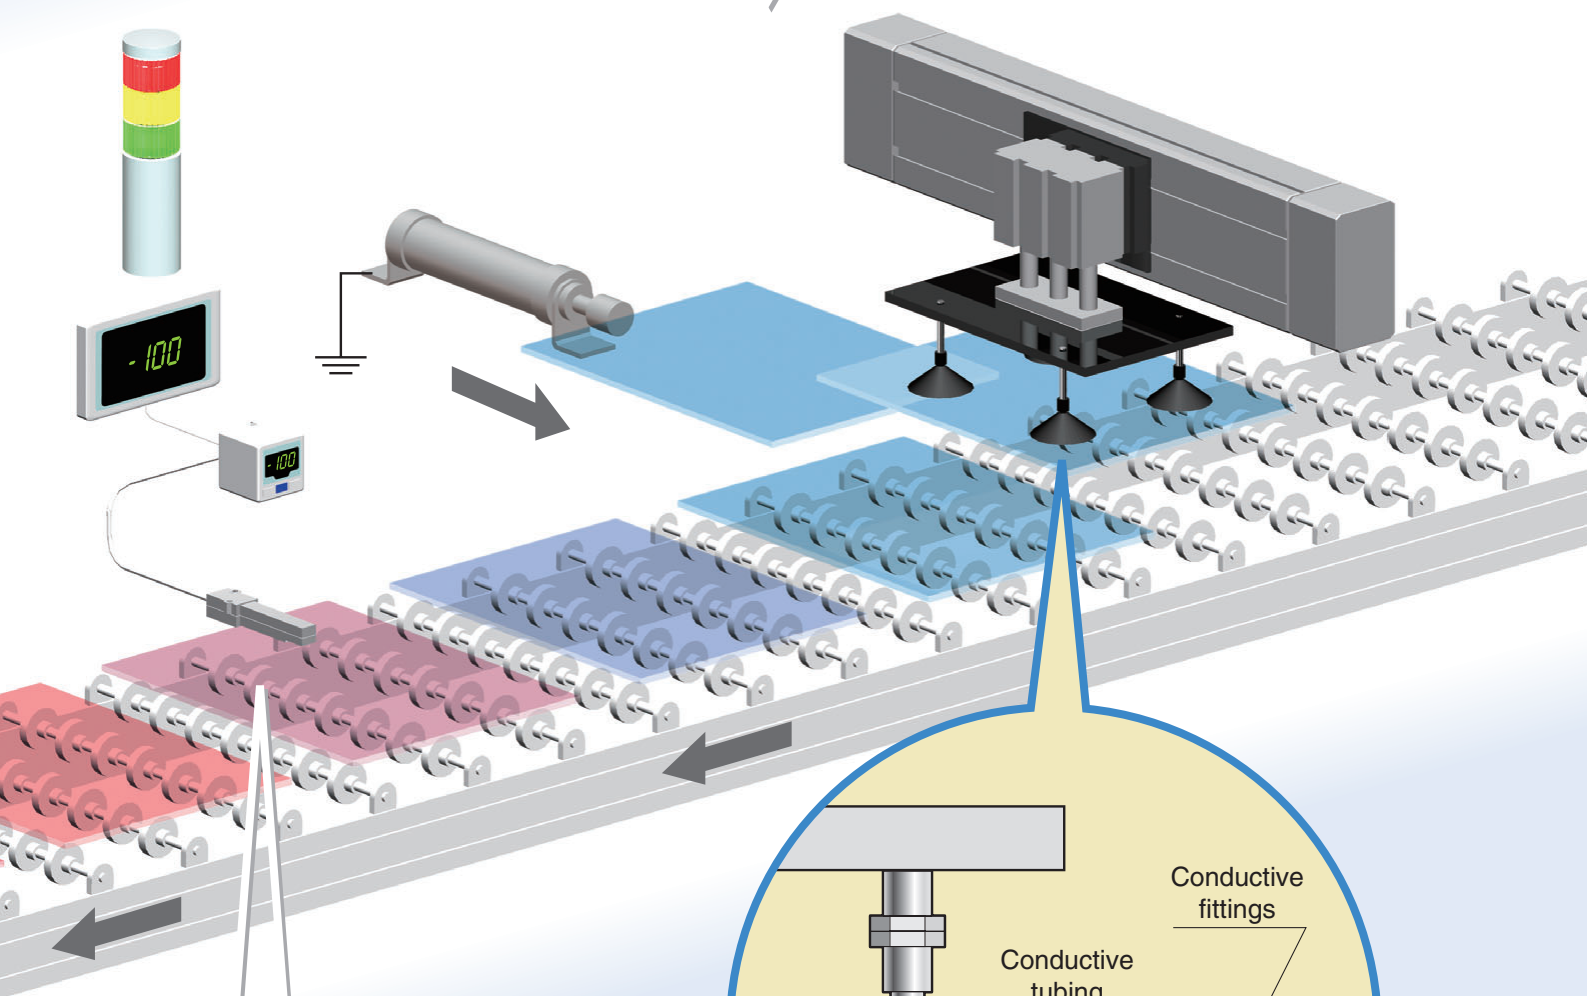


Measurement Equipment (for FA Devices)

Measuring amount of electrostatic charge of a workpiece.


- Confirming electrostatic condition of a workpiece.
- Checking quality

Electrostatic Sensor P.25

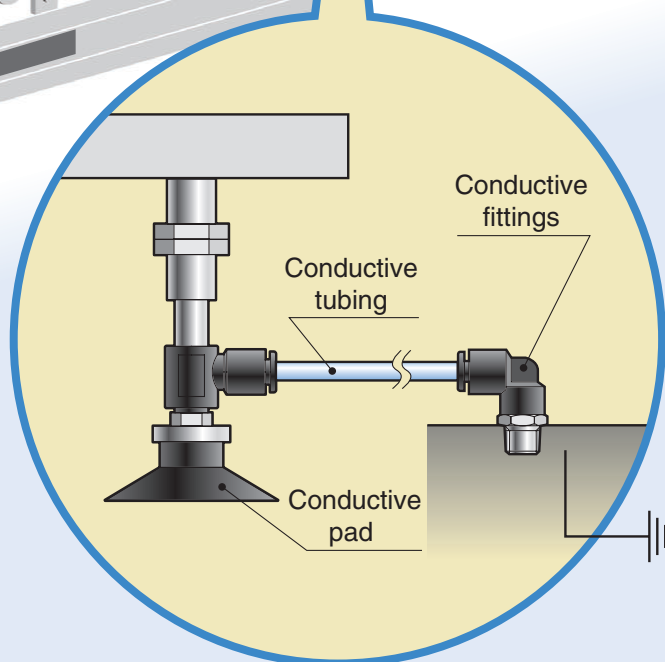


Examples of Static Electricity Generated Problems


Absorbing multiple sheets

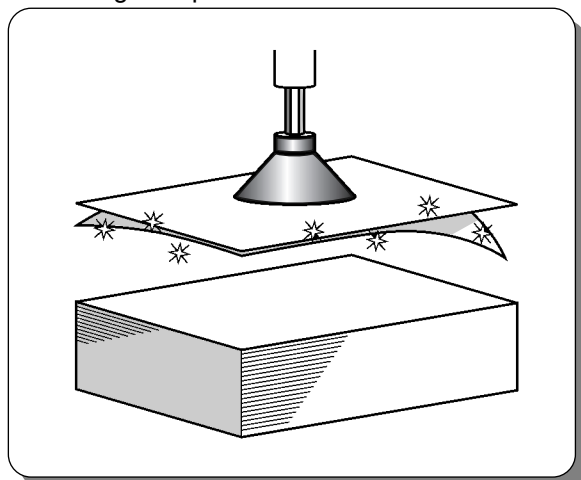


Clogging of parts feeders

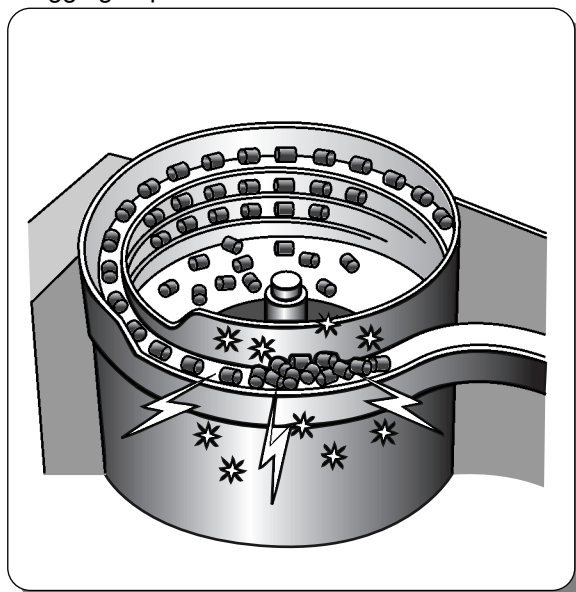

Electrostatic breakdown of substrate and IC chips

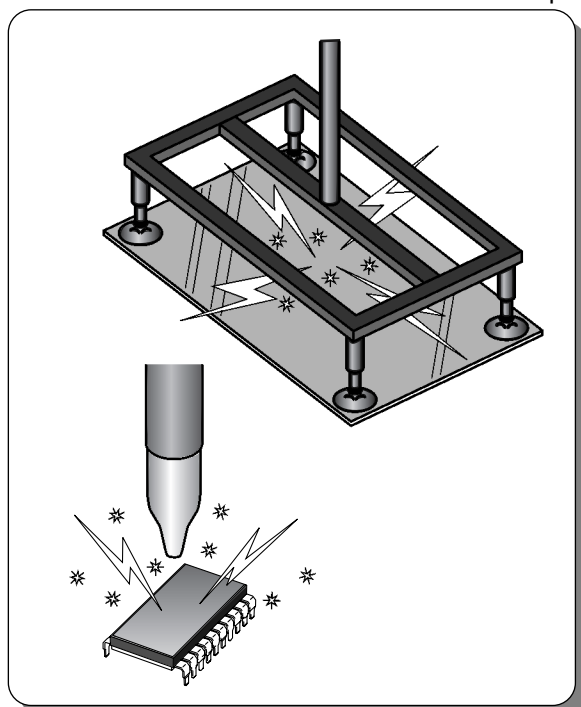


Failures while ejecting workpieces from unloaders

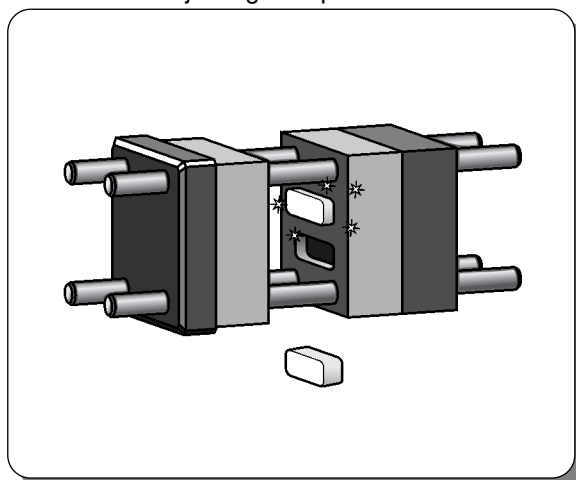

Discomfort due to electrical shocks at workplace



Uneven painting

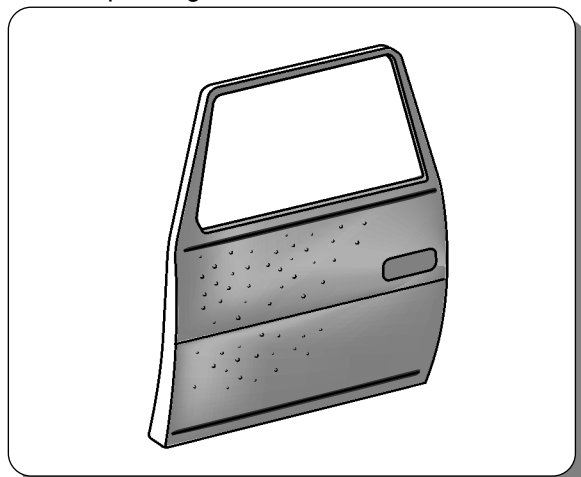


Antistatic Equipment

Lineup of products with conductivity prevention

Friction, contact and detachment cause the build up of static electricity. Static electricity can be instantaneously removed from metals with low volume resistance (conductors) by grounding. Resin and rubber (insulators) which have high volume resistance, however, build up static electricity as it is not eliminated even through grounding. Charged substances cause various problems such as the destruction of devices by electrical discharge, dust adhesion, and the like. Hence, SMC has a lineup of products to which conductive resin and rubber are applied in order to remove static electricity.

SMC's conductive resin and rubber incorporates the following volume resistance materials.


Volume Resistance ($\Omega \cdot m$) for Reference

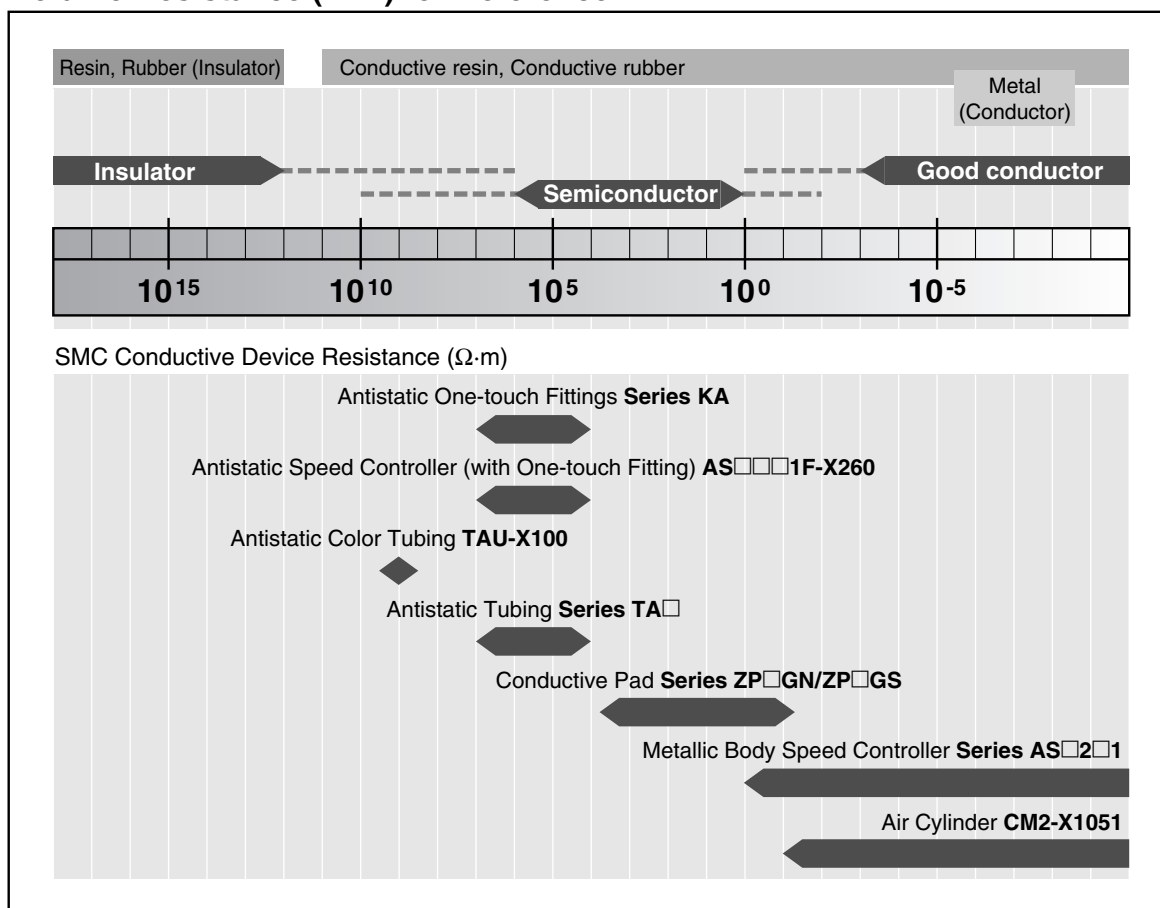

For reference: The following table shows the electric resistance and characteristics of major materials.

Materials	Electric resistance	Characteristics
Resin, Rubber (Insulator)	10^{12} to $10^{18} \Omega \cdot m$	Some static electricity does not attenuate after charging. Grounding is not useful.
Conductive resin, Conductive rubber	$10^{11} \Omega \cdot m$ or less	It is possible to remove static electricity by seconds after grounding.
Metal (Conductor)	$10^0 \Omega \cdot m$ or less	Static electricity can be instantaneously removed by grounding.

Antistatic Equipment INDEX

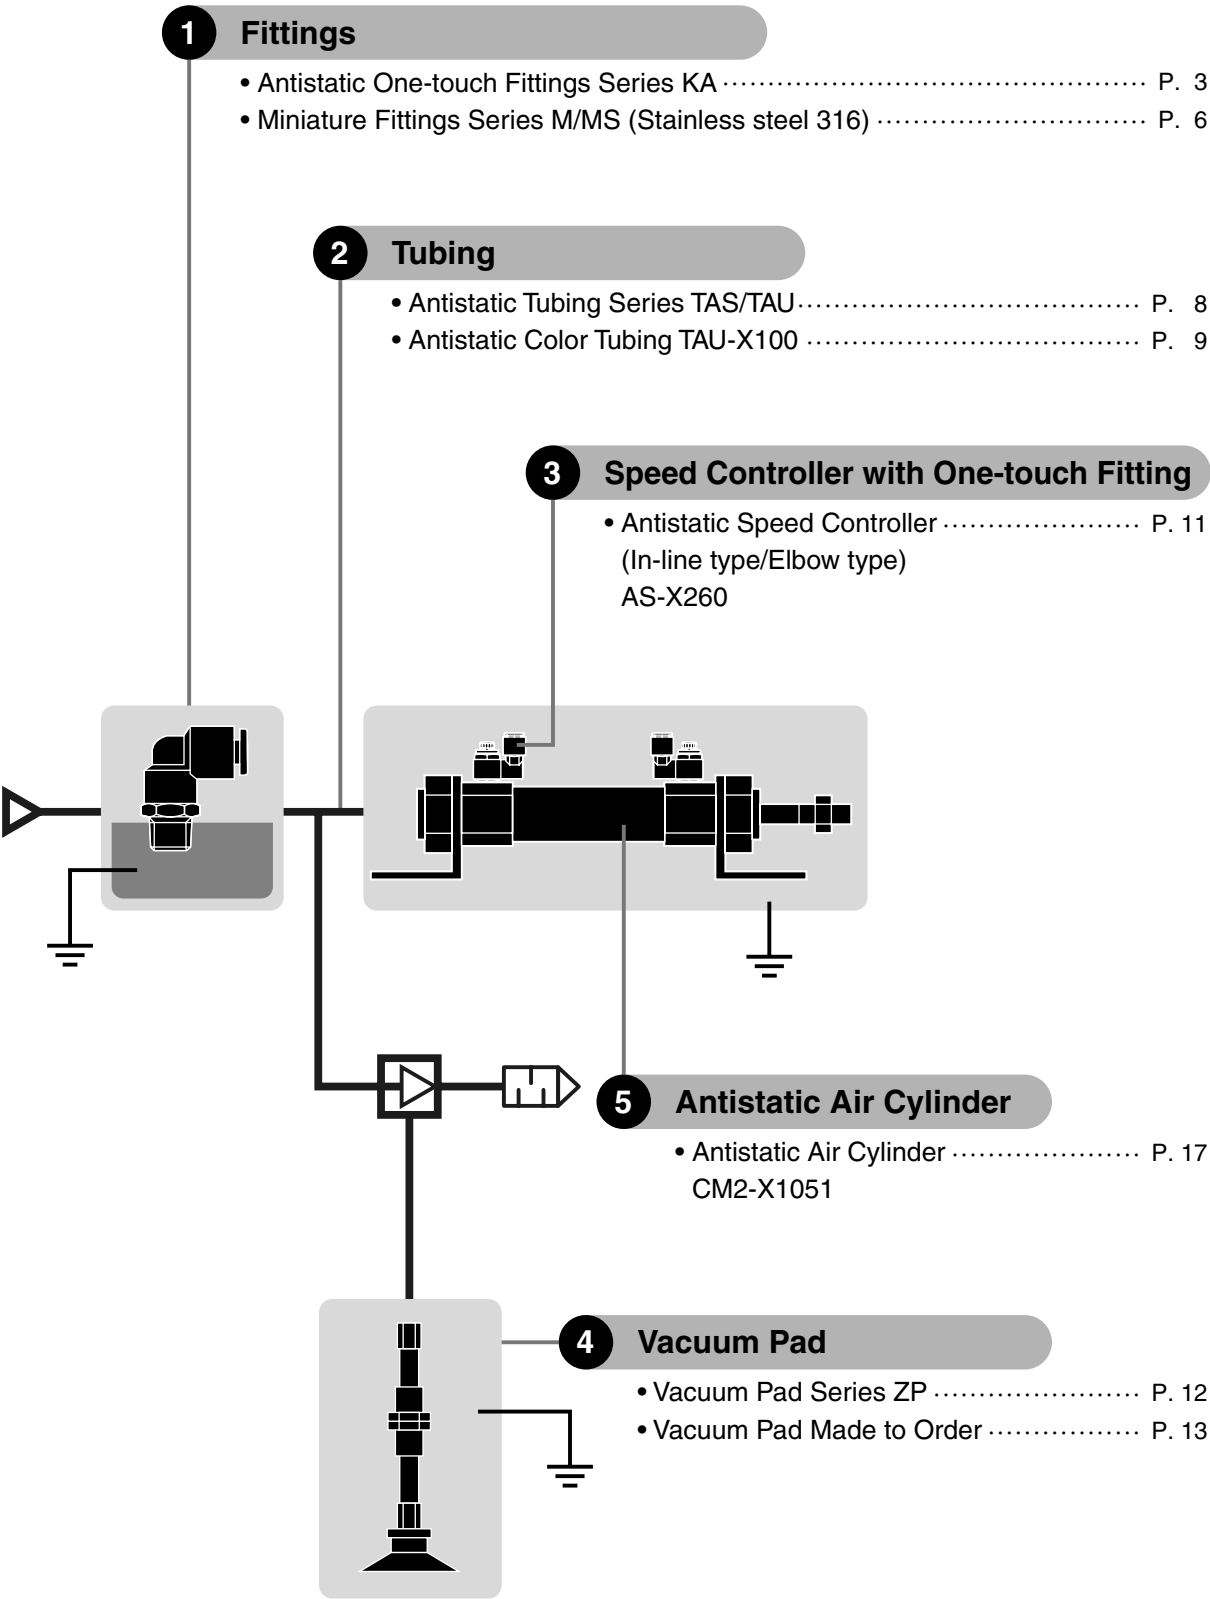

Antistatic One-touch Fittings Series KA

- Possible to use from vacuum (–100 kPa)
- Can be used in copper-free application.
- Surface resistance 10^4 to $10^7 \Omega$
- Conductive resin is used for body and seals in fittings and tubing.



Seal

Can be used for a wide range of pressures from low vacuum up to a pressure of 1.0 MPa.

The use of a special profile ensures sealing and reduces resistance when the tube is inserted.

Chuck

Large retaining force

Has large retaining force while holding force is increased by the collet.

Collet

Guide

Body (Black)

O-ring

Stud

Effective when piping in a confined space.

The body and the threaded portion can rotate (to the degree for positioning).

Gasket

UNI Thread

Release Button (Black)

Light force for removal

When the fitting is removed from the tubing, the check and collet are released, thus preventing them from biting into the tube excessively.

Grounding Method

When UNI thread screws are used metal contact occurs between female and male threads and the fittings do not become electro-statically charged. (With taper threaded screws it is necessary to apply a sealant to the thread, which electrically insulates the fittings causing it to become charged.)

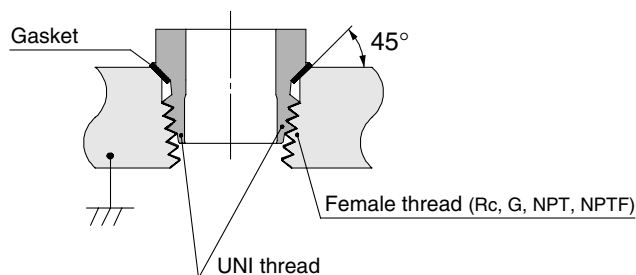


Figure: UNI thread ridge profile

⚠ Caution (Chamfer the female thread.)


Main Parts Material

Body	C3604BD, PBT
Stud	C3604BD
Chuck	Stainless steel 304
Guide	Stainless steel 304, C3604BD, PBT
Collet, Release button	PBT
Seal, O-ring	NBR

- C3604BD is all electroless nickel plated.
- PBT parts have conductive (10^4 to $10^7 \Omega$) and flame resistant applications. (equivalent to UL Standard V-0)
- Conductive NBR (10^4 to $10^7 \Omega$) is used for seals.

Size of female thread chamfering (Recommended values)

Chamfering in accordance with the following table improves thread workability and prevents the occurrence of burrs.



Female thread size	Chamfering bore øD (Recommended value)		
	G	Rc	NPT, NPTF
1/8	10.2 to 11.5	10.2 to 11.8	10.5 to 11.8
1/4	13.6 to 14.5	13.6 to 15.8	14.1 to 15.8
3/8	17.1 to 18.5	17.1 to 19.4	17.4 to 19.4
1/2	21.4 to 22.5	21.4 to 25.1	21.7 to 25.1

Applicable Tubing

Tubing material	Antistatic soft nylon, Antistatic polyurethane
Tubing O.D.	ø3.2, ø4, ø6, ø8, ø10, ø12



Specifications

Fluid	Air
Operating pressure range	–100 kPa to 1 MPa
Proof pressure	3 MPa
Ambient and fluid temperature	0 to 40°C
Thread	UNI thread JIS B0205, Class 2 (Metric coarse thread)
Seal (Thread portion)	Gasket
Copper-free	Brass parts are all electroless nickel plated.
Surface resistance	10^4 to $10^7 \Omega$

Male Connector

KAH

Used to pipe in the same direction from female threaded portion
Most common type

	Applicable tubing O.D. (mm)	Connection thread	Model
	3.2	M5 x 0.8	KAH23-M5
		M6 x 1	-M6
		Uni 1/8	-U01
	4	M5 x 0.8	KAH04-M5
		M6 x 1	-M6
		Uni 1/8	-U01
		Uni 1/4	-U02
	6	M5 x 0.8	KAH06-M5
		M6 x 1	-M6
		Uni 1/8	-U01
		Uni 1/4	-U02
		Uni 3/8	-U03
	8	Uni 1/8	KAH08-U01
		Uni 1/4	-U02
		Uni 3/8	-U03
	10	Uni 1/8	KAH10-U01
		Uni 1/4	-U02
		Uni 3/8	-U03
		Uni 1/2	-U04
	12	Uni 1/4	KAH12-U02
		Uni 3/8	-U03
		Uni 1/2	-U04


<M5, M6>

<UNI thread>

Male Branch Tee

KAT

Used for branching from a female threaded portion at 90° on both sides

	Applicable tubing O.D. (mm)	Connection thread	Model
	3.2	M5 x 0.8	KAT23-M5
		M6 x 1	-M6
		Uni 1/8	-U01
	4	M5 x 0.8	KAT04-M5
		M6 x 1	-M6
		Uni 1/8	-U01
		Uni 1/4	-U02
	6	M5 x 0.8	KAT06-M5
		M6 x 1	-M6
		Uni 1/8	-U01
		Uni 1/4	-U02
		Uni 3/8	-U03
	8	Uni 1/8	KAT08-U01
		Uni 1/4	-U02
		Uni 3/8	-U03
	10	Uni 1/8	KAT10-U01
		Uni 1/4	-U02
		Uni 3/8	-U03
		Uni 1/2	-U04
	12	Uni 1/4	KAT12-U02
		Uni 3/8	-U03
		Uni 1/2	-U04


<M5, M6>

<UNI thread>

Male Elbow

KAL

Used to pipe in the same direction from female threaded portion
Most common type

	Applicable tubing O.D. (mm)	Connection thread	Model
	3.2	M5 x 0.8	KAL23-M5
		M6 x 1	-M6
		Uni 1/8	-U01
	4	M5 x 0.8	KAL04-M5
		M6 x 1	-M6
		Uni 1/8	-U01
		Uni 1/4	-U02
	6	M5 x 0.8	KAL06-M5
		M6 x 1	-M6
		Uni 1/8	-U01
		Uni 1/4	-U02
		Uni 3/8	-U03
	8	Uni 1/8	KAL08-U01
		Uni 1/4	-U02
		Uni 3/8	-U03
	10	Uni 1/8	KAL10-U01
		Uni 1/4	-U02
		Uni 3/8	-U03
		Uni 1/2	-U04
	12	Uni 1/4	KAL12-U02
		Uni 3/8	-U03
		Uni 1/2	-U04

<M5, M6>

<UNI thread>

Male Run Tee

KAY

Used for branching into the same direction and at 90° either from female threaded portion

	Applicable tubing O.D. (mm)	Connection thread	Model
	3.2	M5 x 0.8	KAY23-M5
		M6 x 1	-M6
		Uni 1/8	-U01
	4	M5 x 0.8	KAY04-M5
		M6 x 1	-M6
		Uni 1/8	-U01
		Uni 1/4	-U02
	6	M5 x 0.8	KAY06-M5
		M6 x 1	-M6
		Uni 1/8	-U01
		Uni 1/4	-U02
		Uni 3/8	-U03
	8	Uni 1/8	KAY08-U01
		Uni 1/4	-U02
		Uni 3/8	-U03
	10	Uni 1/8	KAY10-U01
		Uni 1/4	-U02
		Uni 3/8	-U03
		Uni 1/2	-U04
	12	Uni 1/4	KAY12-U02
		Uni 3/8	-U03
		Uni 1/2	-U04

<M5, M6>

<UNI thread>


Antistatic Equipment

Antistatic One-touch Fittings Series KA

Male Branch Y

KAU

Used for branching from a female threaded portion into the same direction

	Applicable tubing O.D. (mm)	Connection thread	Model
		M5 x 0.8	KAU23-M5
3.2		M6 x 1	-M6
		Uni 1/8	-U01
		M5 x 0.8	KAU04-M5
4		M6 x 1	-M6
		Uni 1/8	-U01
		Uni 1/4	-U02
6		M5 x 0.8	KAU06-M5
		M6 x 1	-M6
		Uni 1/8	-U01
8		Uni 1/8	KAU08-U01
		Uni 1/4	-U02
		Uni 3/8	-U03
10		Uni 1/4	KAU10-U02
		Uni 3/8	-U03
		Uni 1/2	-U04
12		Uni 1/4	KAU12-U02
		Uni 3/8	-U03
		Uni 1/2	-U04

<M5, M6>

<UNI thread>

Union Tee

KAT

Used for branch connections of tubes into two directions at 90° on both sides

	Applicable tubing O.D. (mm)	Model
	3.2	KAT23-00
	4	KAT04-00
	6	KAT06-00
	8	KAT08-00
	10	KAT10-00
	12	KAT12-00

Union Y

KAU

Used to branch a tubing in the same direction

	Applicable tubing O.D. (mm)	Model
	3.2	KAU23-00
	4	KAU04-00
	6	KAU06-00
	8	KAU08-00
	10	KAU10-00
	12	KAU12-00

Straight Union

KAH


Used to connect tubes in the same direction

	Applicable tubing O.D. (mm)	Model
	3.2	KAH23-00
	4	KAH04-00
	6	KAH06-00
	8	KAH08-00
	10	KAH10-00
	12	KAH12-00

Different Dia. Straight Union

KAH

Used to connect different size tubes

	Applicable tubing O.D. (mm)		Model
	(a)	(b)	
	3.2	4	KAH23-04
	4	6	KAH04-06
	6	8	KAH06-08
	8	10	KAH08-10
	10	12	KAH10-12

Elbow

KAL

Used to connect tubes at right angles

	Applicable tubing O.D. (mm)	Model
	3.2	KAL23-00
	4	KAL04-00
	6	KAL06-00
	8	KAL08-00
	10	KAL10-00
	12	KAL12-00


Plug-in Reducer

KAR

Used to change the diameter of one-touch fitting

	Applicable tubing O.D. (mm)	Applicable fitting size	Model
	3.2	4	KAR23-04
		6	KAR04-06
		8	-08
		10	-10
		8	KAR06-08
		10	-10
		12	-12
		10	KAR08-10
		12	-12
	10	12	KAR10-12

Miniature Fittings *Series M/MS (Stainless steel 316)*

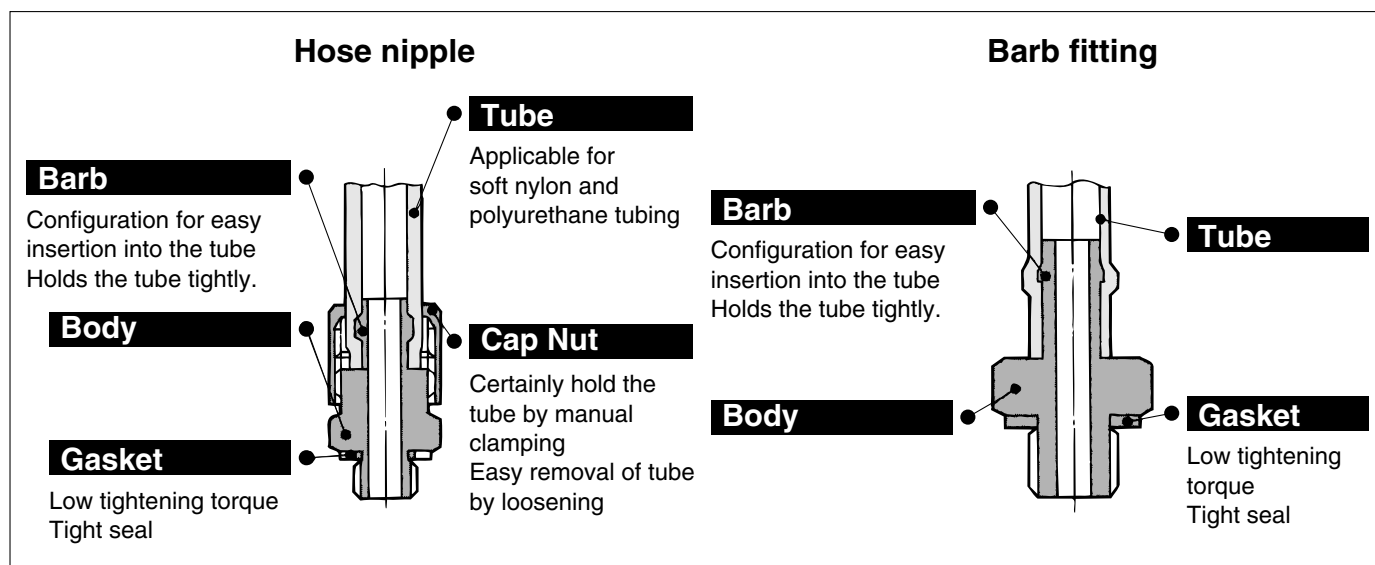

Compact piping space

Hose nipple tubing connection/disconnection is simple while keeping a large retaining force.

Line up various styles

For air connection in confined areas

Hose nipple, Hose elbow

Applicable for soft nylon and polyurethane tubing

Series M



Specifications


Applicable tubing material		Soft nylon ^{Note1)}		Polyurethane
Applicable tubing	M3	ø3.18/ø2.18	ø4/ø2.5	ø3.18/ø2, ø4/ø2.5, ø2 x ø1.2
	M5-R 1/8		ø4/ø2.5 ø6/ø4	ø3.18/ø2 ø4/ø2.5, ø6/ø4, ø2 x ø1.2
Max. operating pressure (at 20°C)		1 MPa		0.8 MPa
Connection size		M3, M5, R 1/8		
Thread		Metric thread (JIS B0205 Class 2), Pipe thread (JIS B0203)		
Fluid		Air, Water ^{Note 2)}		
Ambient and fluid temperature		-50 to 60°C Water: 0 to 40°C (with no freezing)		

Note 1) Water is not available with soft nylon tubing.
Note 2) Available with hose nipple type only

Main Parts Material

Material	Body	C3604BD (Nipple M-3N, M-5N: Stainless steel 303)
	Gasket	PVC, Stainless steel 304, NBR

Series MS (Stainless steel 316)



Specifications

Applicable tubing material		Soft nylon ^{Note1)}		Polyurethane
Applicable tubing O.D./I.D.		ø3.18/ø2.18	ø4/ø2.5 ø6/ø4	ø3.18/ø2 ø4/ø2.5, ø6/ø4
Max. operating pressure (at 20°C)		1 MPa		0.8 MPa
Connection size		M5 (JIS B0205 Class 2: Metric coarse thread)		
Fluid		Air, Water ^{Note2)}		
Ambient and fluid temperature		-50 to 60°C Water: 0 to 40°C (with no freezing)		

Note 1) Water is not available with soft nylon tubing.
Note 2) Available with hose nipple type only

Main Parts Material

Material	Body	Stainless steel 316
	Gasket	PVC

Antistatic Equipment

Miniature Fittings *Series M/MS*



Although there are other miniature fittings in the General Catalog, they are not designed for antistatic applications. Only the following are available.

Series M

Series	Model	Description	Application	Note
M3	M-3AU-2	Barb fitting for soft tubing 	For polyurethane tubing	ø2/ø1.2 x M3
	M-3AU-3	Barb fitting for soft tubing 	For soft nylon tubing	ø3.18/2.18 x M3
			For polyurethane tubing	ø3.18/2 x M3
	M-3AU-4		For soft nylon and polyurethane tubing	ø4/2.5 x M3
	M-3N	Nipple 	Fitting to workpiece and fitting to fitting connection	M3 male x M3 male
	M-3P	Plug 	Use to plug unused M3 port.	

M5	M-5AU-2	Barb fitting for soft tubing		For polyurethane tubing	ø2/ø1.2 x M5
	M-5AU-3	Barb fitting for soft tubing		For soft nylon tubing	ø3.18/2.18 x M5
				For polyurethane tubing	ø3.18/2 x M5
	M-5AU-4		For soft nylon and polyurethane tubing	ø4/2.5 x M5	
	M-5AU-6			ø6/4 x M5	
	M-5H-4	Hose nipple		For soft nylon and polyurethane tubing	ø4/2.5 x M5
	M-5H-6	ø6/4 x M5			

Series MS

Series	Model	Description	Application	Note
M5	M-5L	Elbow 	One-sided 90° elbow	M5 female x M5 female
	M-5T	Tee 	Both sides allow 90° connection	M5 female x M5 female x M5 female
	M-5J	Extension fitting 	Solid piece moves fitting up from workpiece.	M5 male x M5 female
	M-5N	Nipple 	Fitting to workpiece and fitting to fitting connection	M5 male x M5 male
	M-5UN	Universal nipple 	Body rotates at 360° around the stud axis.	M5 male x M5 male PAT.
	M-5E	Bulkhead union 	Panel mount connection	M5 female x M5 female
	M-5ER	Bulkhead reducer 	Reduction from Rc 1/8 to M5 including panel or bracket mounting	Rc1/8 x M5 female
	M-5M	Manifold 	For reducing Rc 1/8 female be diverted to up to 9, M5 stations, including panel or bracket mounting	Rc 1/8 x M5 female (9 stations)
M-5P	Plug 	Use to plug unused M5 port.		

Model	Description	Application	Note
MS-5AU-3	Barb fitting for soft tubing	For soft nylon tubing	ø3.18 x ø2.18 x M5
		For polyurethane tubing	ø3.18/ø2.18 x M5
MS-5AU-4		For soft nylon and polyurethane tubing	ø4/ø2.5 x M5
MS-5AU-6			ø6/ø4 x M5
MS-5H-4	Hose nipple 	For soft nylon and polyurethane tubing	ø4/ø2.5 x M5
MS-5H-6			ø6/ø4 x M5
MS-5P	Plug 	Use to plug unused M5 port.	
MS-5J	Extension fitting 	Solid piece moves fitting up from workpiece.	M5 male x M5 female
MS-5N	Nipple 	Fitting to workpiece and fitting to fitting connection	M5 male x M5 male
MS-5UN	Universal nipple 	Body rotates at 360° around the stud axis.	M5 male x M5 male PAT.

Antistatic Tubing *series TAS/TAU*

Antistatic Soft Nylon Tubing / Series TAS

Flame resistant
(equivalent to UL 94
Standard V-0)
 10^4 to $10^7 \Omega$



Series

● — 20 m roll □ — 100 m reel


Model	TAS3222	TAS0425	TAS0604	TAS0805	TAS1065	TAS1208
Tubing O.D. (mm)	3.2	4	6	8	10	12
Tubing I.D. (mm)	2.2	2.5	4	5	6.5	8

Black (B)	●	●	●	●	●	●
-----------	---	---	---	---	---	---

Specifications

Max. operating pressure (at 20°C)	1.2 MPa					
Burst pressure	Refer to the burst pressure characteristics curve.					
Min. bending radius (mm)	12	12	15	19	27	32
Operating temperature	0 to 40°C					
Material	Conductive nylon + Flame resistant nylon (equivalent to UL 94 Standard V-0)					
Surface resistance	10^4 to $10^7 \Omega$					

Burst Pressure Characteristics Curve and Operating Pressure

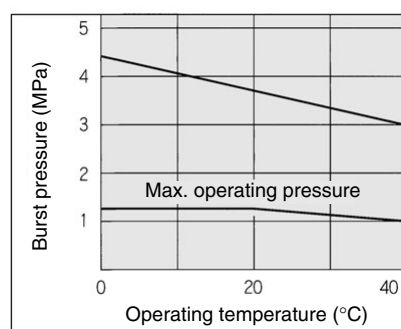

How to Order

TAS1065 **B** — **100**

Tubing
designation

Color	
Symbol	Color
B	Black

Length per roll

Symbol	Length
20	20 m roll
100	100 m reel

Made to Order



Coil tubing

Antistatic Polyurethane Tubing / Series TAU

Soft type
 10^4 to $10^7 \Omega$



Series


Model	TAU3220	TAU0425	TAU0604	TAU0805	TAU1065	TAU1208
Tubing O.D. (mm)	3.2	4	6	8	10	12
Tubing I.D. (mm)	2	2.5	4	5	6.5	8
Black (B)	●	●	●	●	●	●

●—20 m roll □—100 m reel

Max. operating pressure (at 20°C)	0.9 MPa					
Burst pressure	Refer to the burst pressure characteristics curve.					
Min. bending radius (mm)	10	10	15	20	27	35
Operating temperature	0 to 40°C					
Material	Conductive polyurethane					
Surface resistance	10^4 to $10^7 \Omega$					

Specifications

Burst Pressure Characteristics Curve and Operating Pressure

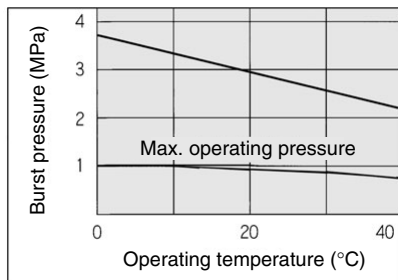

How to Order

TAU1065	B	100
Tubing designation	Color	Length per roll
	Symbol	Length
	B	Black
	20	20 m roll
	100	100 m reel

Made to Order



Antistatic Polyurethane Tubing / -X100

Made to Order

- 5 colors
- Surface resistance $10^9 \Omega$

Specifications

Fluid	Air
Max. operating pressure (at 20°C)	0.8 MPa
Ambient and fluid temperature	0 to 40°C
Material	Antistatic polyurethane
Surface resistance	$10^9 \Omega$
Recommended fittings	Antistatic one-touch fittings: Series KA Miniature fittings: Series M/MS (Note)

Note) Miniature fittings: The following models of the M/MS series are only available.

Series M	Series MS
M-3AU-2	MS-5AU-4
M-3AU-4	MS-5AU-6
M-5AU-2	MS-5H-4
M-5AU-4	MS-5H-6
M-5AU-6	
M-5H-4	
M-5H-6	

How to Order

TAU	0604	BU	20	X100
Antistatic polyurethane tubing		Antistatic polyurethane color tubing		
	Tubing Size		Tube roll length (m)	
	Symbol	O.D. x I.D.	Symbol	Length
	0212	ø2 x ø1.2	20	20 m roll
	0425	ø4 x ø2.5		
	0604	ø6 x ø4		
	0805	ø8 x ø5		
	1065	ø10 x ø6.5		
	1208	ø12 x ø8		
		Color		
		Symbol	Color	Display
		W	White	G
		BU	Blue	C
		B	Black	—

Antistatic Speed Controller (In-line type/Elbow type)

AS-X260

Made to
Order


Electrostatic prevention measures for semiconductor manufacturing devices, etc.

It is possible to prevent products from being electro-statically charged by applying conductive materials (using conductive NBR seal) and grounding UNI thread structure^{*1)} (Gasket seal method).



^{*1)} Ensure that the female thread connected to the speed controller is grounded.
If not grounded, there is a possibility that the controller and tube may remain charged.
Antistatic tubes should also be used.

Feature 1: Surface Resistance 10^4 to $10^7 \Omega$ (Conductive material is applied to the body seal of the controller.)

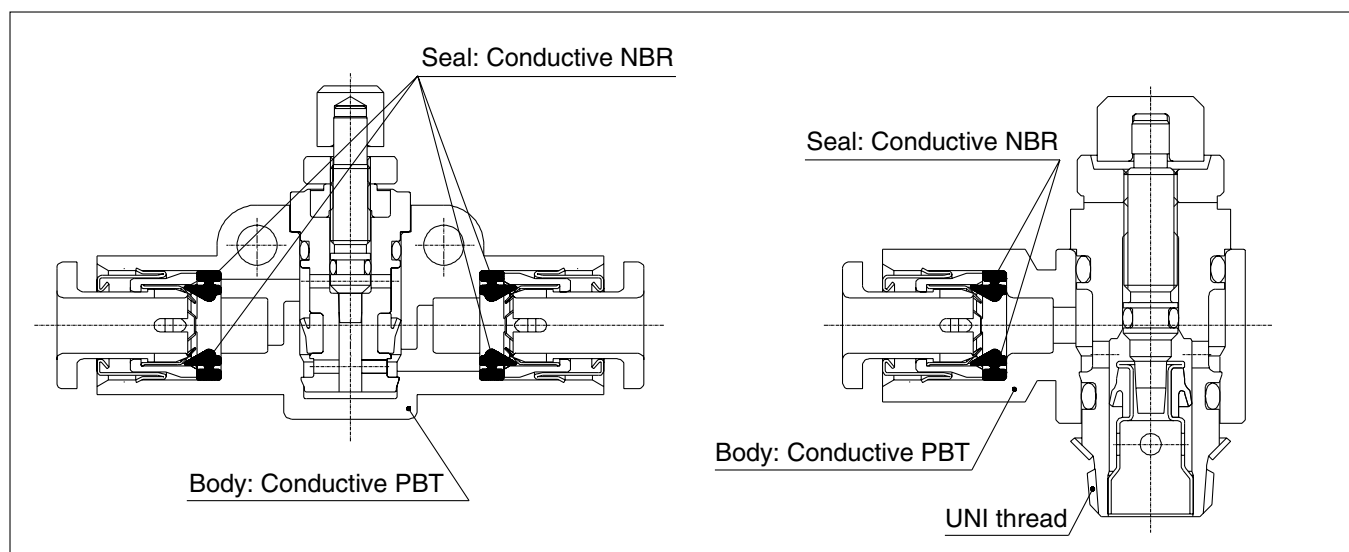

Features 2: Antistatic UNI Thread Structure (Gasket seal method) (AS22□1F-□-□-X260 type)

Grounding Method


When UNI thread screws are used metal contact occurs between female and male threads and the controller does not become electro-statically charged. (With taper threaded screws it is necessary to apply a sealant to the thread, which electrically insulates the controller causing it to become charged.)

Specifications

Common Specifications

Type	Elbow	In-line
Model	AS□2□1F-□-□-X260	AS□000F-□-□-X260
Fluid	Air	
Proof pressure	1.5 MPa	1 MPa
Maximum operating pressure	1 MPa	0.7 MPa
Minimum operating pressure	0.1 MPa	
Ambient and fluid temperature	-5 to 60°C (with no freezing)	
Number of needle rotations	10 rotations ^{*2)}	8 rotations
Applicable tubing material	Antistatic soft nylon tubing (Series TAS) Antistatic polyurethane tubing (Series TAU)	
Surface resistance	10^4 to $10^7 \Omega$	

^{*2)} 8 rotations for AS12□1F-M5-04-X260 and AS12□1F-M5-06-X260

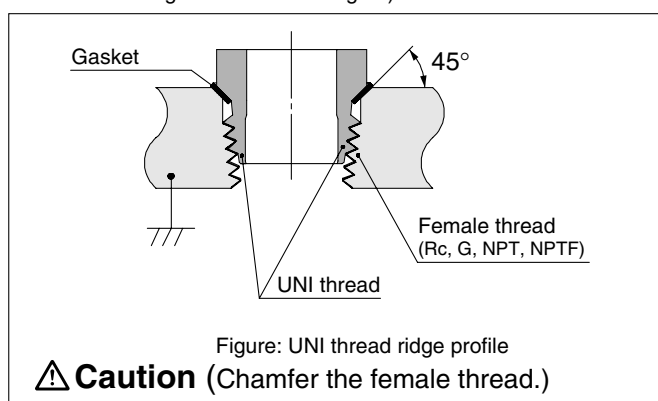

Series Variation


Type	Model		Port size	Applicable tubing O.D.				Applicable cylinder bore size (mm)
	Meter-out	Meter-in		4	6	8	10	
Elbow	AS1201F-M5	AS1211F-M5	M5 x 0.8	●	●			6, 10, 16, 20
	AS2201F-U01	AS2211F-U01	Uni1/8	●	●	●	●	20, 25, 32
	AS2201F-U02	AS2211F-U02	Uni1/4	●	●	●	●	20, 25, 32, 40
In-line	AS1000F		—	●	●			6, 10, 16, 20

^{*3)} Contact SMC for models other than the above.

^{*4)} Manufactured upon receipt of order.

Dimensions


Elbow type

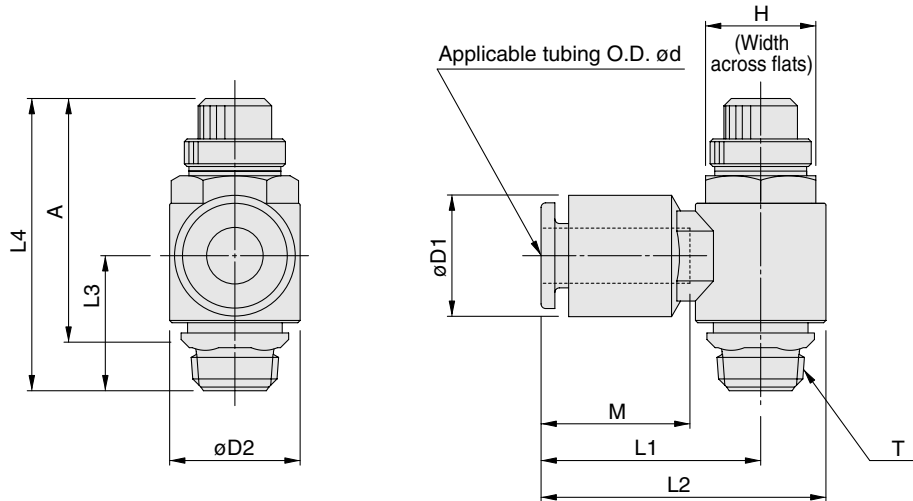

Model		Applicable tubing O.D. ød	T	H	D1	D2	L1	L2	L3	L4		A*)		M
Meter-out	Meter-in									MAX.	MIN.	MAX.	MIN.	
AS1201F-M5-04-X260	AS1211F-M5-04-X260	4	M5	8	10.4	9.6	20.6	25.4	12.2	28.8	26	25.2	22.4	15.8
AS1201F-M5-06-X260	AS1211F-M5-06-X260	6			12.8		21.6	26.4						16.8
AS2201F-U01-04-X260	AS2211F-U01-04-X260	4	Uni1/8	12	11.4	14.2	23.1	30.2	14.3	36.4	31.4	31	26	15.8
AS2201F-U01-06-X260	AS2211F-U01-06-X260	6			13.2		23.9	31						16.8
AS2201F-U01-08-X260	AS2211F-U01-08-X260	8			15.2		25.3	32.4						18.7
AS2201F-U01-10-X260	AS2211F-U01-10-X260	10			18.5		32.1	39.2						20.8
AS2201F-U02-04-X260	AS2211F-U02-04-X260	4	Uni1/4	17	10.4	18.5	25.2	34.4	17.2	39.6	34.6	33	28	15.8
AS2201F-U02-06-X260	AS2211F-U02-06-X260	6			12.8		27.2	36.4						16.8
AS2201F-U02-08-X260	AS2211F-U02-08-X260	8			15.2		27.2	36.4						18.7
AS2201F-U02-10-X260	AS2211F-U02-10-X260	10			18.5		35.3	44.5						20.8

*)Reference thread dimensions after installation.

In-line type

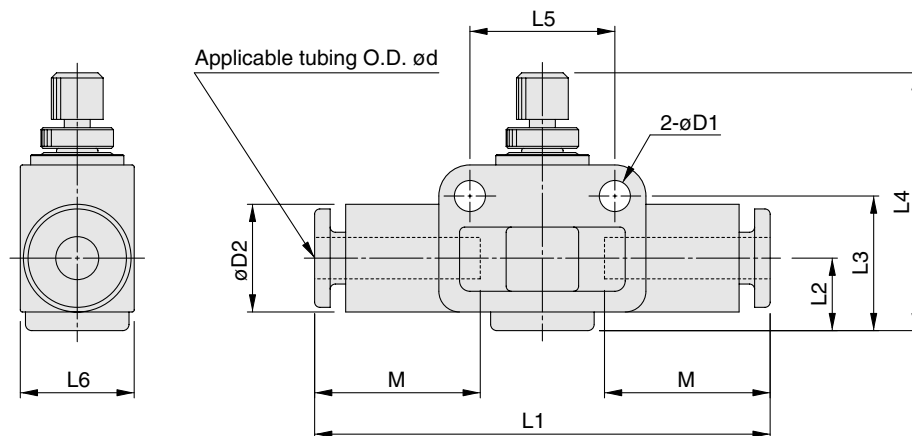

Model	Applicable tubing O.D. ød	D1	D2	L1	L2	L3	L4		L5	L6	M
							MAX.	MIN.			
AS1000F-04-X260	4	3.2	10.4	44	7	13	25	28	14	11	15.8
AS1000F-06-X260	6		12.8	46		13.5					16.8



For the safe use of the controller, be sure to read "Safety Precautions" in our company's Best Pneumatics General Catalog before handling.

Vacuum Pad Series ZP

Pad material

● Conductive NBR (Black with one white mark), Conductive silicon rubber (Black with two white marks)


Pad shape

(Compatible with all models)

Flat (U)



Flat with ribs (C)




Deep (D)



Bellows (B)



Thin flat (UT)
Thin with ribs (CT)








Pad size	2 x 4	3.5 x 7	4 x 10	ø2	ø4	ø6	ø8	ø10	ø13	ø16	ø20	ø25	ø32	ø40	ø50
Flat	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
Flat with ribs	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Deep	—	—	—	—	—	—	—	●	●	●	●	●	●	●	●
Bellows	—	—	—	—	—	●	●	●	●	●	●	●	●	●	●
Thin flat	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Thin with ribs	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

With buffer

Non-rotating / Rotating
ø2 to 8: stroke 6, 10, 15, 25 mm
ø10 to 32: stroke 10, 20, 30, 40, 50 mm
ø40/50: stroke 10, 20, 30, 50 mm

Model

Without buffer


		Vacuum entry	Connection			Vacuum entry	Connection		
 Series ZPT Vertical vacuum entry	Male thread	(Common)			Female thread	Buffer body			
	Female thread	(Common)			With barb fitting	Buffer body			
					With one-touch fitting	Buffer body			
 Series ZPR Lateral vacuum entry with one-touch fitting	With one-touch fitting	Male thread			With one-touch fitting	Buffer body			
	With one-touch fitting	Female thread							
 Series ZPY Lateral vacuum entry with barb fitting	With barb fitting	Male thread			With barb fitting	Buffer body			
	With barb fitting	Female thread							

Vacuum Pad Made to Order


Antistatic Pad

With the use of antistatic urethane rubber, the pad can eliminate the static electricity more slowly compared to the conductive rubber.
 10^9 to $10^{11} \Omega \cdot \text{cm}$

How to Order

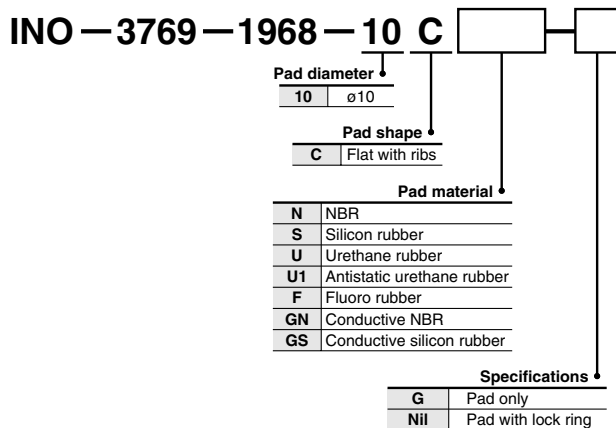

Dimensions (mm)

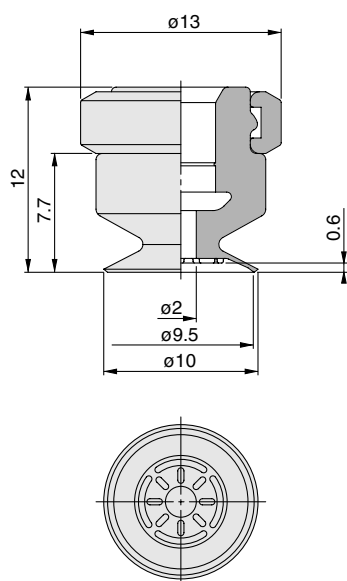

* Interchangeable with standard ($\phi 10$ to $\phi 16$) adapter.

How to Order

INO — 3769 — 1561


Pad Part Number

INO — 3769 — 1369 — G

Rubber Specifications

Material	Antistatic urethane rubber
Volume resistivity value	10^9 to $10^{11} \Omega \cdot \text{cm}$
Durometer	80 $\pm$ 5

Dimensions (mm)

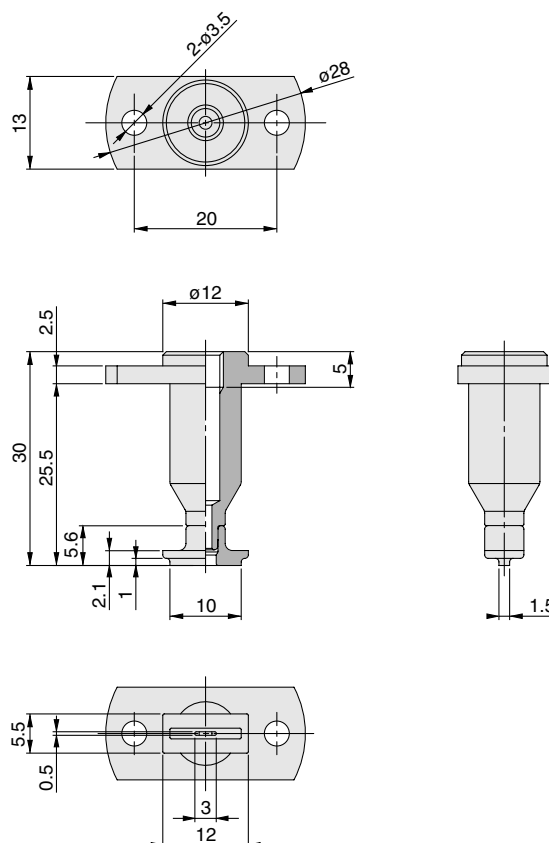

Metal Pad with Buffer


- Improved accuracy for suction point.
- Impact to the work is reduced by buffer.
- Prevent detachment failure due to static electricity, and avoid work damage.
- As metal is used for rubber end, static electricity can be instantly eliminated.



How to Order

ZP – A0035XTJAC – DBJ00315

Dimensions

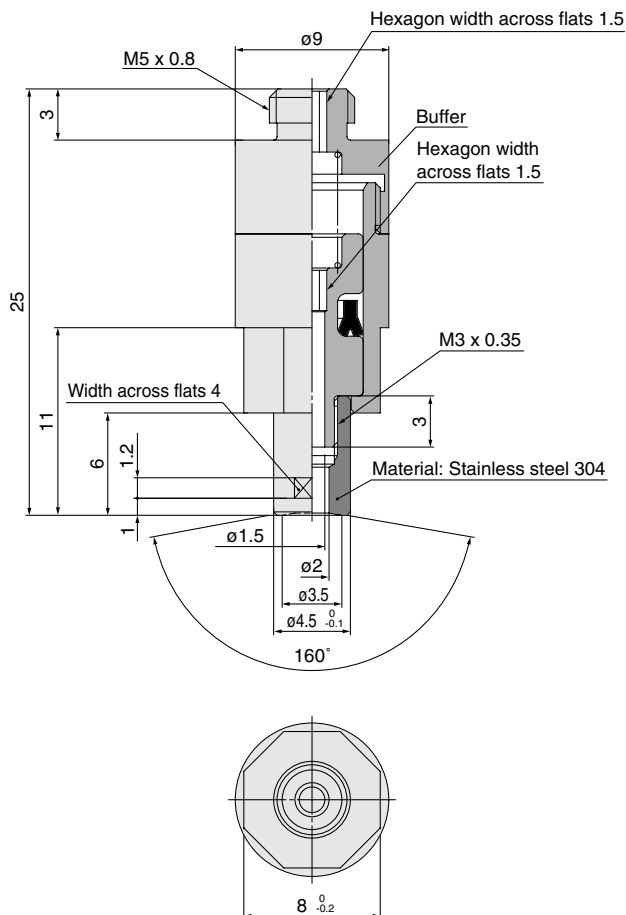

Buffer Specifications


Rotation stopper	None
Stroke	2 mm

If glue is not applied to the threads the screw may become loose.

- When you need buffer only, use the following part numbers to order.
 - Buffer part number ①: **ZP-CZZZZ9ZJAC-DBJ00315**

Sponge Pad

- Conductive silicon and conductive CR sponge are adopted.
- Applicable to BGA ball surface, electric substrate, uneven work surface
- Rubber is used for the adapter end surface to reduce impact when contacting the work.




How to Order

INO-3769-2450-SG 06

Specifications Pad diameter
SG Sponge 06 ø6

Dimensions

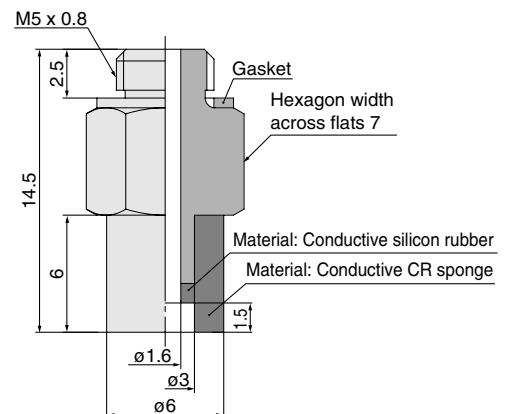


- When you need sponge or adapter only, use the following part number to order.
 - Sponge part number: **INO-3769-2380-G**
 - Adapter part number: **INO-3769-2450-A**

How to Order

INO-3769-2665-SG 10

Specifications Pad diameter
SG Sponge 10 ø10

Dimensions

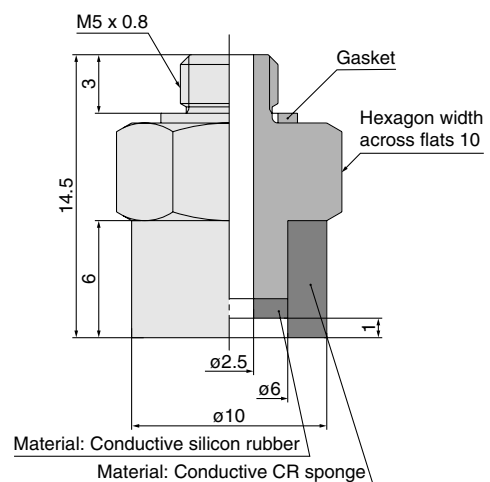


- When you need sponge or adapter only, use the following part number to order.
 - Sponge part number: **INO-3769-1839-S10-G**
 - Adapter part number: **INO-3769-2665-AD**

Clean Attachment for Vacuum Pad / ZP-E20□-DBH00142

Made to Order

With the use of conductive PEEK material attachment on the bellows rubber pad, static electricity can be prevented, and oil will not be left on the work.

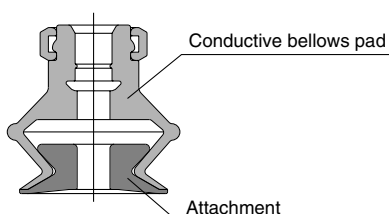

- Prevent the work from contacting the rubber material, and stop transition of the oil oozing out of the rubber material.
(Note: Please consult SMC for details.)
- With combination with bellows pad, scratches on the work can be decreased.
- Applications: Suction process of semiconductor and FPD devices

Variations

Size	ø6, ø8, ø10, ø13, ø16, ø20, ø25, ø32
Material	Conductive PEEK (Volume resistivity: 10^5 to 10^6 Ω·cm)
Applicable pad	Bellows vacuum pad

Attachment



Standard pad diameter	Conductive PEEK
ø6	ZP-E201-DBH00142
ø8	ZP-E202-DBH00142
ø10	ZP-E203-DBH00142
ø13	ZP-E204-DBH00142
ø16	ZP-E205-DBH00142
ø20	ZP-E206-DBH00142
ø25	ZP-E207-DBH00142
ø32	ZP-E208-DBH00142


Note) Part number in above table shows the number for the attachment only. If pad is ordered together, please refer followings.

How to Order (attachment and pad together)

- As shown below, add * for the attachment part number beneath the vacuum pad number. But please note that they are not assembled.
- This attachment can be mounted to SMC standard bellows pad only.
- For conductive PEEK attachment, use the pad made of conductive material.

Ex. ZPT06B9NJ10-B5-A8 ← Vacuum pad part number
 * ZP-E201-DBH00142 ← Attachment part number

Dimensions



(mm)

Model	A	B	C	D	E	F	Y
ZP06B	6	7	1.6	0.5	3	13.5	0.5
ZP08B	8	9	3		3.5	16.5	
ZP10B	10	12	3.5		5.5	19	
ZP13B	13	15	4		6	20.5	
ZP16B	16	18	8		8.5	24.5	
ZP20B	20	22	10	1	8.5	25	1
ZP25B	25	27			11.5	30	
ZP32B	32	34					

<Caution>

- Clean the attachment before usage.

This product is not cleaned after machining. Do not use the attachment out of the package, or residual subject on the attachment is transferred to the work.

Please consult SMC if any question occurs.

Cleaning method (Reference)

- 1) Use vinyl gloves which do not generate particle, and hold the pad except vacuuming part.
- 2) Supply 2-Propanol (isopropyl alcohol) for electronic industry (Purity > 99.5%) to a cloth which does not generate particle.
- 3) Wipe lightly the attachment vacuum surface and the part which may contact with the work.
- 4) Wipe it again with a dry cloth which generates no particle.

- If the contact with hard material becomes a problem, do not use the attachment.

Removing the film covering the contacting foot brackets (anodization), causes the cylinder to become conductive from the piston rod end to the foot brackets.

How to Order

CM2 L 40 150 X1051

Mounting

I	Axial foot
F	Rod end flange
G	Head end flange
C	Single clevis
D	Double clevis
T	Head end trunnion

Cylinder stroke (mm)


Bore size	Stroke
20	25, 50, 75, 100, 125, 150
25	25, 50, 75, 100, 125, 150
32	25, 50, 75, 100, 125, 150, 200
40	25, 50, 75, 100, 125, 150, 200, 250

Bore size

20	20 mm
25	25 mm
32	32 mm
40	40 mm

Conductive air cylinder

It is possible to eliminate static electricity from the mounted brackets without moving the ground wire attached to the flexible part.

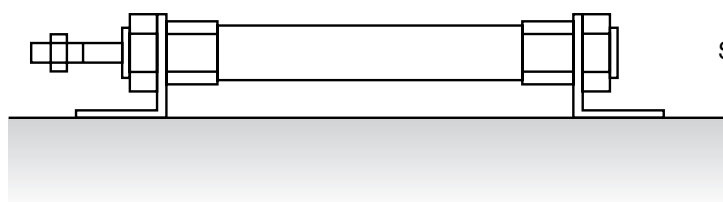

Surface resistance value: $10^{-1} \Omega$ or less


Electrostatic Removal Equipment (Ionizer)

Electrostatic removal equipment generate ions by corona discharge to neutralize static electricity.

An ionizer is useful under the following conditions:

- Grounding is not possible.
- Humidity levels cannot be controlled.
- Workpiece comprises insulated materials such as rubber.
- Conductive materials cannot be applied.

Electrostatic removal equipment generate positive or negative ions by utilizing corona discharge etc. Ions sent to the workpiece adjust the ion balance of positively or negatively charged workpieces, making them electrically balanced and neutralizing static electricity.

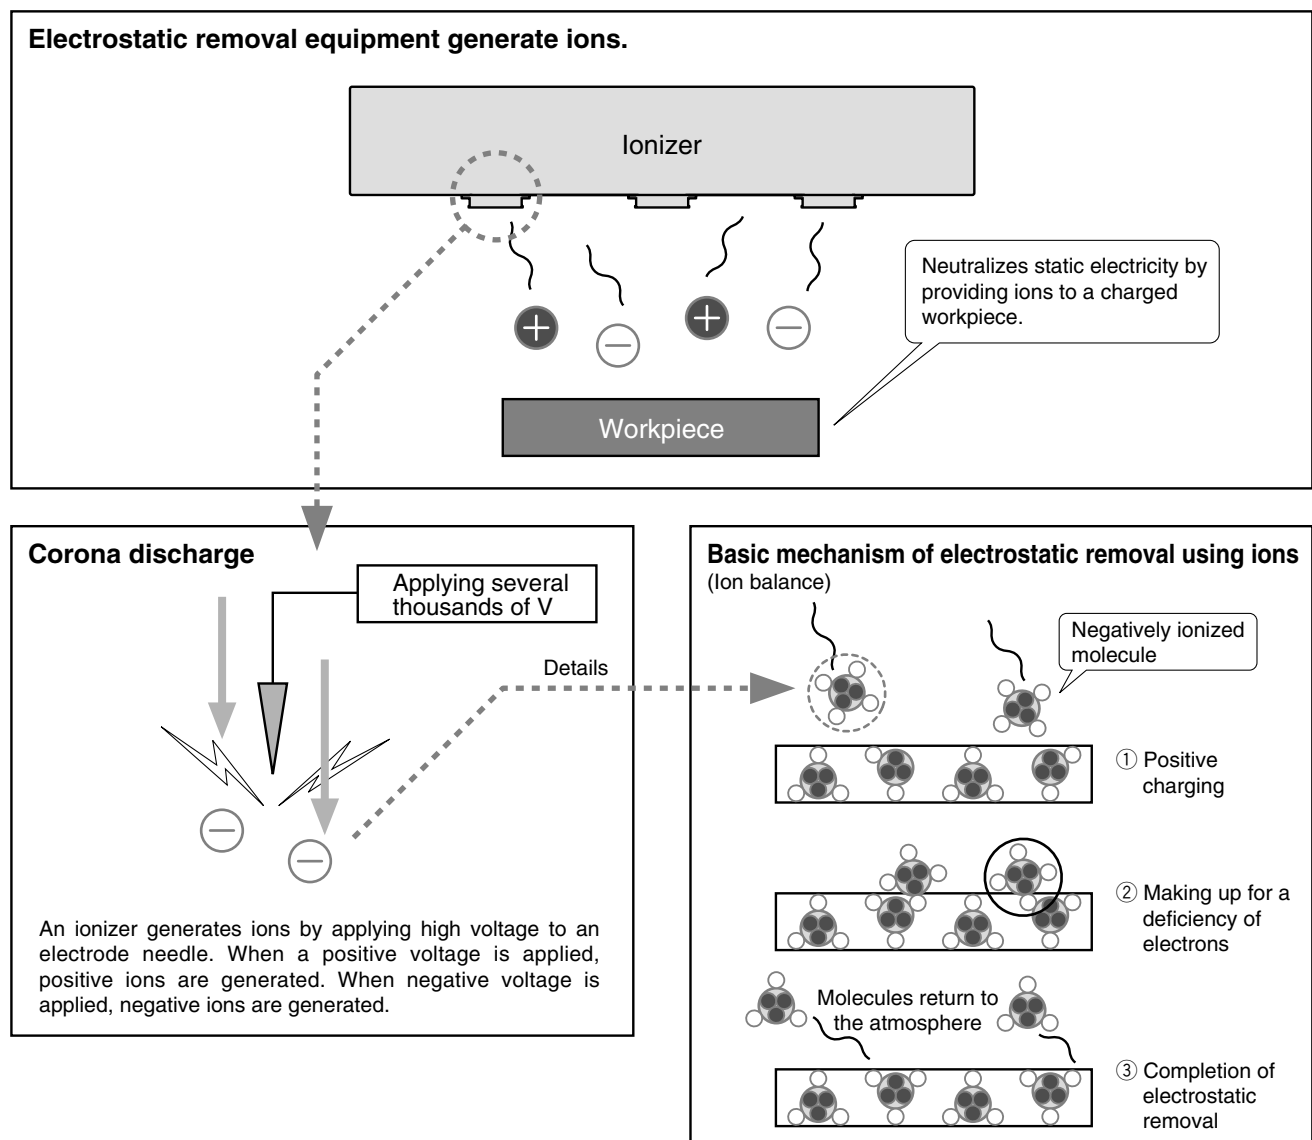

Ionizer Series IZS31

● Discharge time **0.3 seconds**

Discharge time was reduced by improving the efficiency of the basic specifications for the feedback sensor, air purge pressure, and high frequency etc.

Conditions / Static buildup decreased from 1000 V to 100 V
 Discharged object: Charged plate monitor (150 mm x 150 mm, capacitance 20 pF)
 Installation distance: 200 mm
 (Tungsten electrode with air purge)



Auto-balance sensor

Measures the ion balance.





Feedback sensor

Detects the polarity of a discharged object and measures the charged voltage.

Rapid neutralization of static electricity using a feedback sensor

- The speed of static neutralization has been increased by reading the workpiece's electrostatic potential with the feedback sensor and continuously emitting ions of a reverse polarity.

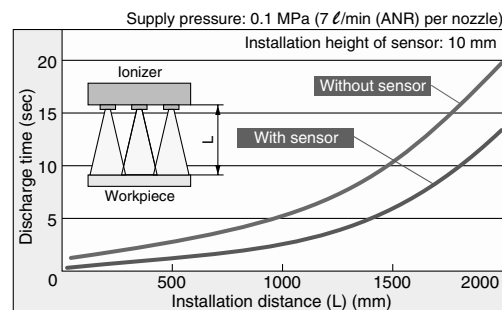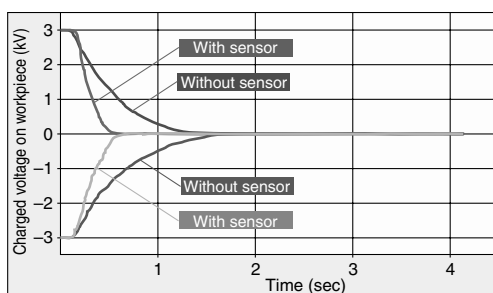


- Operation mode after static electricity removal (ion balance: within ± 30 V) can be selected.

Energy saving run mode: Stops generating ions after static neutralization to reduce power consumption.

Air consumption can also be reduced by controlling the pneumatic valve with a static neutralization completion signal.

Note) The pneumatic valve must separately be procured.


Continuous static electricity removal run mode: After static neutralization, the ionizer changes to pulse DC operation and continues to neutralize static electricity to make it approach 0 V even if the ion balance is below 30 V.

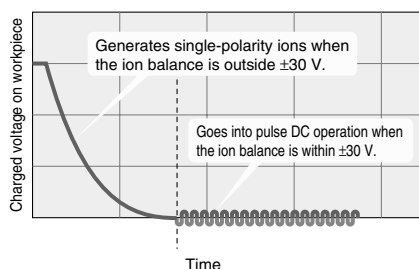

Mode	Ion emission waveform	
Sensing DC	+	Stop
Energy saving run	-	
Sensing DC	+	
Continuous static neutralization run	-	
Pulse DC	+	
	-	
+ charged image	Static neutralization completed	


Automatic ion balance adjustment and **reduction** in ion balance **adjustment** man-hours using an auto-balance sensor

- In the pulse DC mode, the ion balance can be automatically adjusted using an auto-balance sensor.

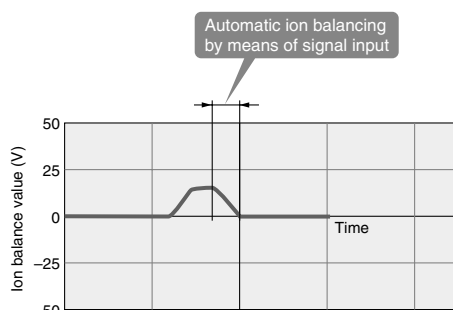

- The auto-balance sensor may be connected only when adjusting the ion balance.


- The object is not affected by the height of installation or any disturbance interference since the ionizer is designed to adjust the ion balance near the auto-balance sensor.

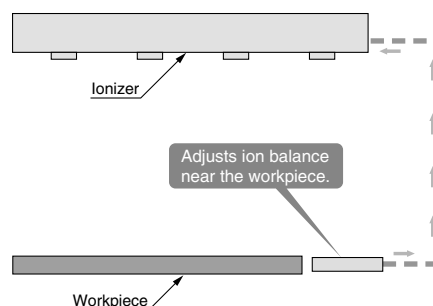

Available for workpieces **moving at high speed**


- Switching over frequency: **Max 60 Hz**

Ions are discharged at high density at workpieces moving at high speed.

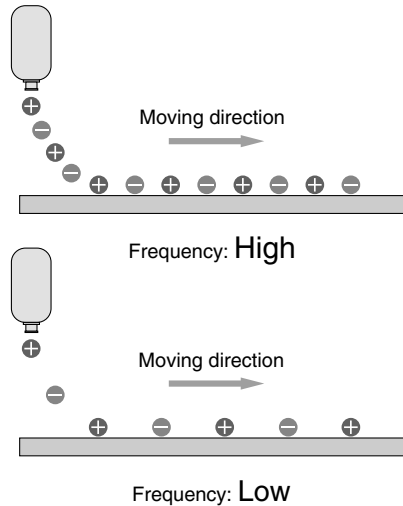

This reduces the range of surface potential fluctuations for short installation distances after static neutralization.

Note) The range of surface potential fluctuations varies depending on the object's material, etc.

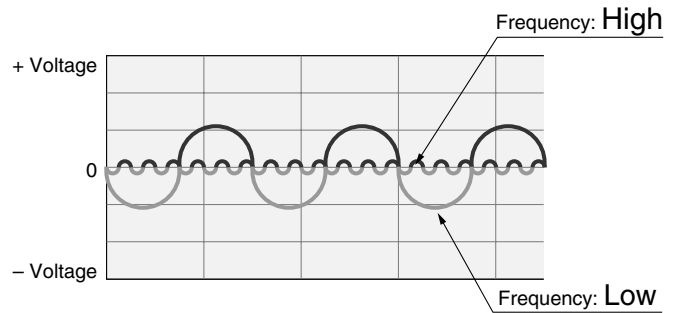


Effective for **short range static neutralization**

- Electricity removal variation prevented

Electrode cartridge 40 mm pitch: **-X15**

(Standard: 80 mm pitch) (Supported length: 1260 mm max.)


Note) Air purge nozzles are arranged at an 80 mm pitch.

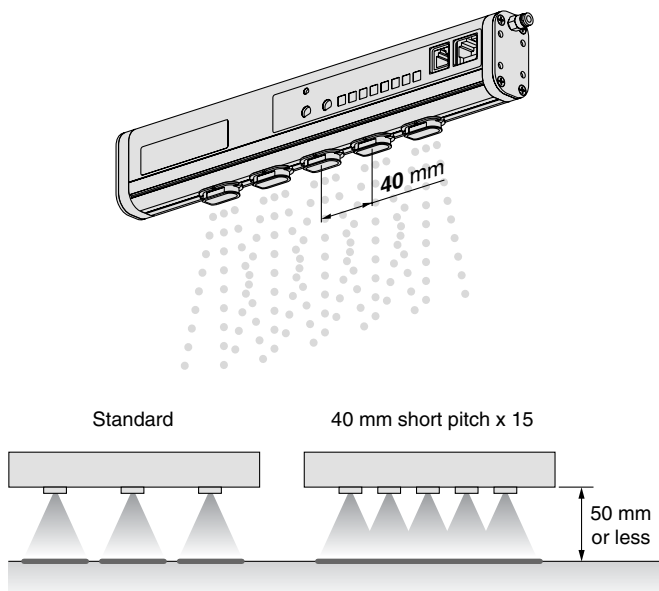

Applicable for air purge supply pressure: **0.7 MPa**

- Effective for removal of foreign matter during long range neutralization of static electricity

Air purge: Yes With sensor: (1 Hz/60 Hz)

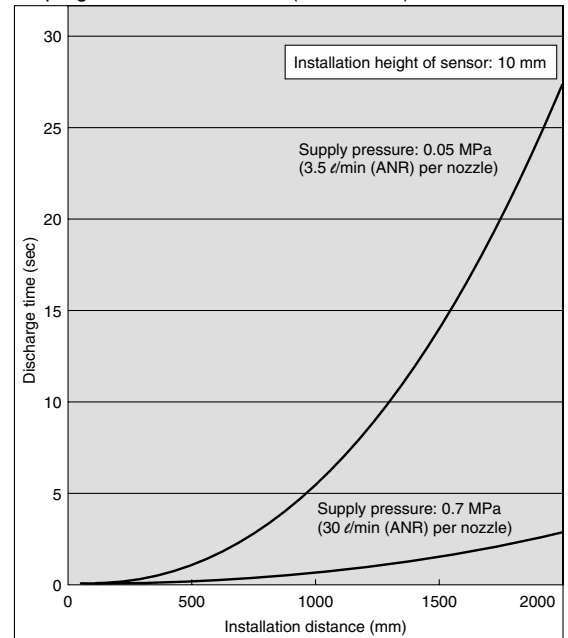


DC mode: According to the setting of the frequency trimmer, **any polarity can be fixed** for consecutive emission.

- Can be used to neutralize static electricity from high speed, high electric potential workpieces.

Display function


- Visualization of charging condition
(During sensing DC mode)
- Visualization of ion balance
(When pulse DC mode or auto-balance sensor are used.)

Workpiece electric polarity	LED + OK -	Workpiece electric charge voltage	
Positive ↑ Static electricity removal completed ↓ Negative		+400 V or higher	Light ON
		+100 V to +400 V	Blinking at 4 Hz
		+30 V to +100 V	Light ON
		Within ±30 V	Blinking at 4 Hz
		-30 V to -100 V	Light ON
		-100 V to -400 V	Light ON
		-400 V or lower	Light ON

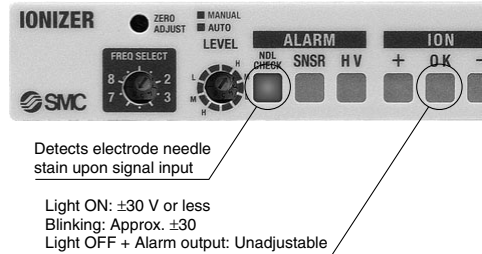

Detects the electric potential difference and outputs in an analog voltage. (During sensing DC mode)

- Outputs measured data at a 1 to 5 V level when a feedback sensor is used.
By outputting the data to a PLC, etc., it is possible to control static electricity.

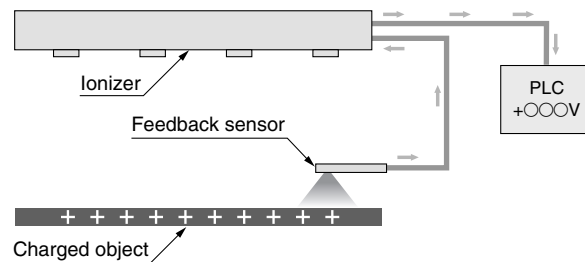

Option

- 3 types electrode needle material
 - Tungsten (Ion balance: ±30 V)
 - Monocrystal silicon (Ion balance: ±30 V Applicable to environments sensitive to metal contamination)
 - Stainless steel (Ion balance: ±100 V)




- Non-standard bar length compliant:
IZS31-□□□-X10 (Made to Order)

Standard	300, 380, 620, 780, 1100, 1260, 1500, 1900, 2300
-X10	460, 540, 700, 860, 940, 1020, 1180, 1340, 1420, 1580, 1660, 1740, 1820, 1980, 2060, 2140, 2220

Safety function

- Electrode cartridge drop prevention
 - Locking by double-action

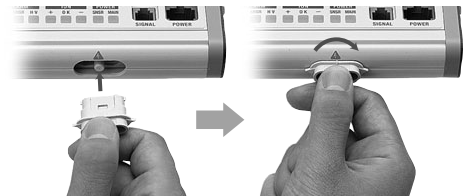


- Security cover
Can even more reliably prevent electrode cartridges from dropping off.



Examples of Applications


Neutralizing static electricity on PET bottles

- Trip-resistance during conveying.
- Prevents adhesion of dust.

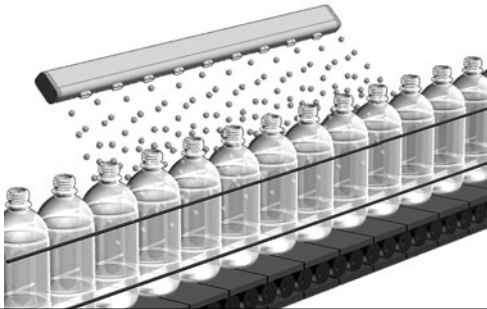


Neutralizing static electricity on a film

- Prevents adhesion of dust.
- Prevents winding failure due to wrinkles, etc.

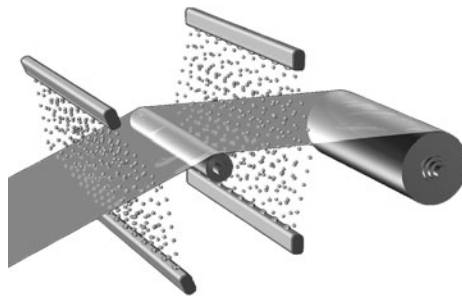


Neutralizing static electricity on mold goods

- Improves detachability of mold goods from a die.

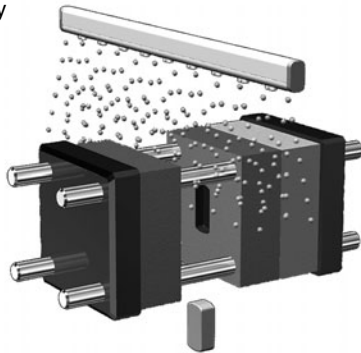


Neutralizing static electricity on film mold goods

- Prevents attaching to conveyer.
- Prevents dispersion of finished goods.

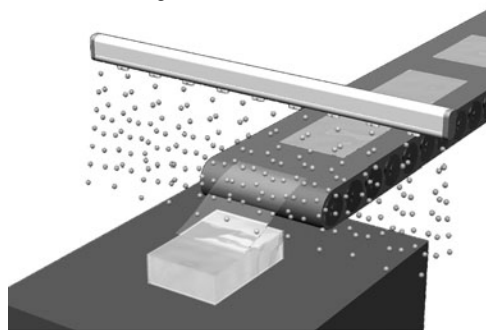


Neutralizing static electricity wafer transfer

- Prevents breakage due to discharge between wafers and hands.

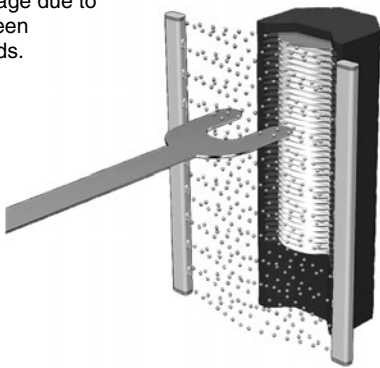


Neutralization of static electricity from packing films

- Prevents the filled substance from adhering to the packing film.
- Reduces packing mistakes.

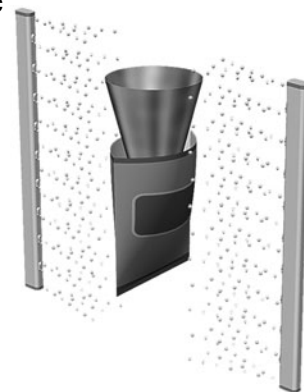


Neutralizing static electricity on an electric substrate

- Prevents element disruption due to discharge.
- Prevents adhesion of dust.

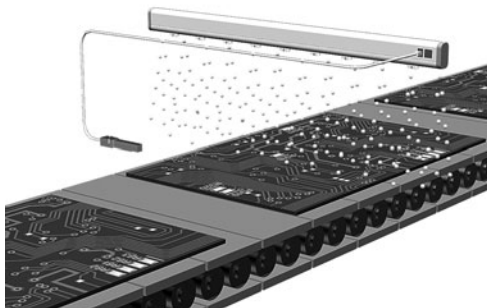

Neutralizing static electricity on a glass substrate

- Prevents breakage due to adhesion and discharge.
- Prevents adhesion of dust.

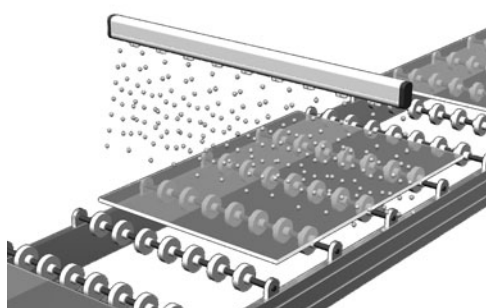

Electrostatic Removal Equipment

Ionizer Series IZS31

Specifications

Ionizer model	IZS31-□□ (NPN specification)	IZS31-□□P (PNP specification)
Ion generation method	Corona discharge type	
Method of applying voltage	Sensing DC, Pulse DC, DC	
Output for emitting electricity	±7000 V	
Ion balance Note 1)	±30 V (Stainless electrode needle: ±100 V)	
Air purge Operating pressure	0.7 MPa or less	
Power supply voltage	24 VDC ±10%	
Effective discharge distance	50 to 2000 mm (Sensing DC mode: 200 to 2000 mm)	

Note 1) In case where air purge is performed between a charged object and an ionizer at a distance of 300 mm.

How to Order

Ionizer **IZS31-780** □ □ □ - □ □ - □

Bar type Bar length Electrode needle material Output Power supply cable Sensor Bracket (End bracket, Center bracket)

Symbol	Bar length
300	300 mm
380	380 mm
620	620 mm
780	780 mm
1100	1100 mm
1260	1260 mm
1500	1500 mm
1900	1900 mm
2300	2300 mm

	Tungsten
Nil	
C	Silicon
S	Stainless steel

	NPN output
Nil	
P	PNP output

	With power supply cable (3 m)
Nil	
Z	With power supply cable (10 m)
N	None

	None
Nil	
F	With feedback sensor
G	With auto-balance sensor

	None
Nil	
B	With bracket Note)

Note) The number of center brackets differ depending on the bar length. (Refer to the below table.)

Bar length (mm)	End bracket	Center bracket
300, 380, 620, 780		None
1100, 1260, 1500	With 2 pcs.	With 1 pc.
1900, 2300		With 2 pcs.

Number of Brackets

Made to Order

Ionizer / Series IZS31

Symbol	Contents	Specifications
-X10	Non-standard bar length compliant (80 mm pitch)	460, 540, 700, 860, 940, 1020, 1180, 1340, 1420, 1580, 1660, 1740, 1820, 1980, 2060, 2140, 2220
-X14	Model with electrode cartridge security cover	The main unit is shipped fitted with an electrode cartridge security cover available as an option.
-X15	Model with 40 mm pitch electrode cartridges	This model comes fitted with electrode cartridges arranged at a 40 mm pitch (standard pitch: 80 mm). Note) Maximum bar length is 1260 mm. The air purge nozzles are arranged at an 80 mm pitch.


Refer to the catalog ES100-68 for details.

Related Static Electricity Eliminating Equipment

SMC can provide all the equipment required to supply air to the ionizer.

Consider the equipment below not only for providing an “opportunity to decrease maintenance” and “preventing damage” but also for an “energy-saving countermeasure”.

Recommended pneumatic circuit diagram

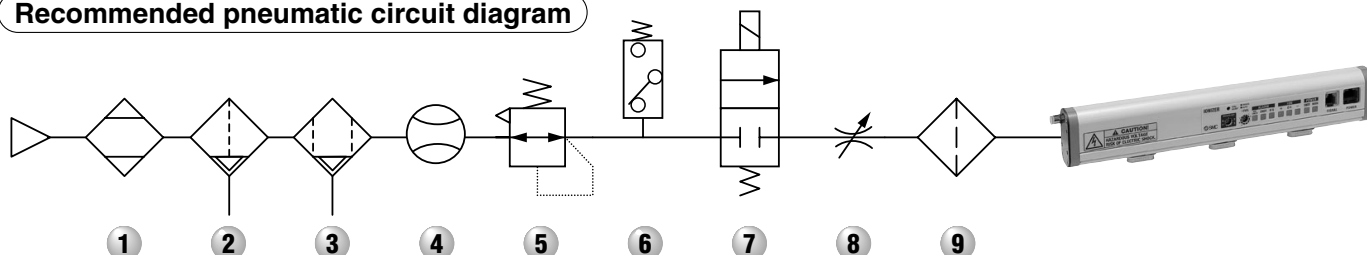

1 Air Dryer / Series IDF

Decreases the dew point of compressed air. Limits moisture generation which can lead to damage.



2 Air Filter / Series AF

Eliminates solid foreign matters such as power particles in the compressed air.



3 Mist Separator / Series AFM

Eliminates oil mist which is difficult to eliminate with an air filter.



4 Digital Flow Switch / Series PF2A

Decreases the air consumption by flow control.



2-Color Display Digital Flow Switch / Series PFM



5 Regulator / Series AR

Decreases the air consumption by setting to an appropriate pressure.



6 Digital Pressure Switch / Series ISE30

The pressure control prevents the ability of static electricity removal from being reduced in accordance with the reduction of air pressure.



7 2 Port Solenoid Valve / Series VX



8 Throttle Valve / AS-X214

Regulates to the appropriate air volume depending upon the installation condition. Decreases the air consumption.



9 Clean Air Filter / Series SFD


Built-in hollow fiber elements Filtration: 0.01μm
Adopted hollow fiber elements with over 99.99% filtering efficiency don't contaminate workpieces.



Measurement Equipment



Confirmation of “actual status” is important in controlling static electricity.

- **Potential measurement: ± 20 kV** (detected at a 50 mm distance)
 ± 0.4 kV (detected at a 25 mm distance)
- **Detects the electrostatic potential and outputs in an analog voltage.**
 - Output voltage: 1 to 5 V (output impedance: Approx. 100 Ω)
- **Possible to measure electrostatic potential**

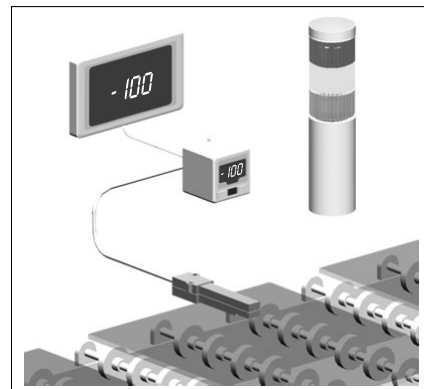

Electrostatic Sensor Series IZD10

Dimensions (actual size)

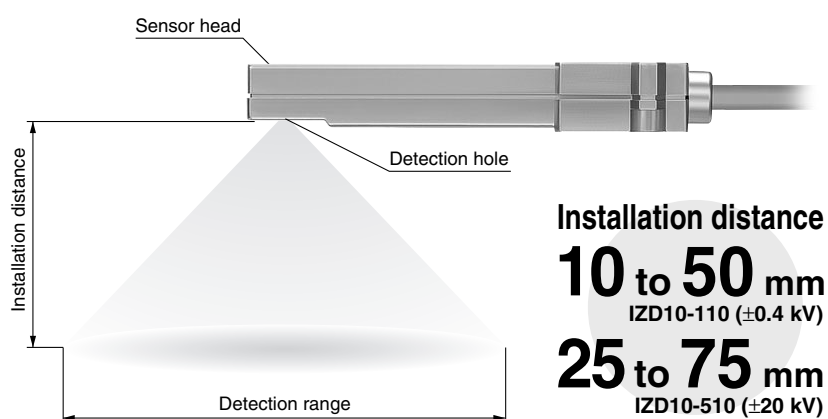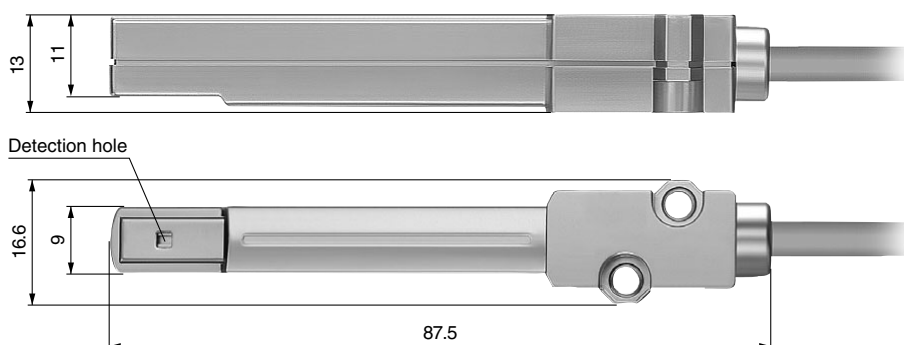

Installation Distance and Detection Range
IZD10-110 IZD10-510

Installation distance (mm)	Detection range (mm)	Installation distance (mm)	Detection range (mm)
10	45	25	100
20	85	30	120
25	100	40	150
30	120	50	180
40	150	60	205
50	180	70	225
		75	235

How to Order

IZD 10 - 1 10

Model

10 Electrostatic sensor

Potential measurement

1 ± 0.4 kV
5 ± 20 kV

Electrostatic Sensor Monitor *Series IZE11*

- Output: Switch output x 2 + Analog output (1 to 5 V, 4 to 20 mA)
- Minimum unit setting: 0.001 kV (at 0.4 kV), 0.1 kV (at 20 kV)
- Display accuracy : $\pm 0.5\%$ F.S. ± 1 digit or less
- Detection distance correction function (adjustable in 1 mm increments)
- Range switching supports two sensors. (± 0.4 kV, ± 20 kV)



Electrostatic Sensor Monitor
Series IZE11


How to Order

IZE11 0

Output specifications


0	NPN open collector 2 outputs + Analog output (1-5 V)
1	NPN open collector 2 outputs + Analog output (4-20 mA)
2	PNP open collector 2 outputs + Analog output (1-5 V)
3	PNP open collector 2 outputs + Analog output (4-20 mA)

Option 1

Nil	None
L	Connector cable for power supply / output 




Note) The cable is not connected but packed together with product for shipment.

Option 3

Nil	None
C	With connector for sensor connection 

Note) The connector is not connected but packed together with product for shipment.

Option 2

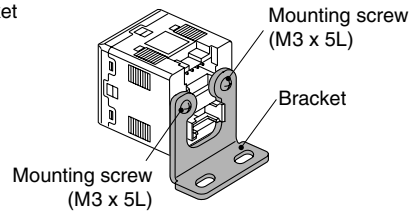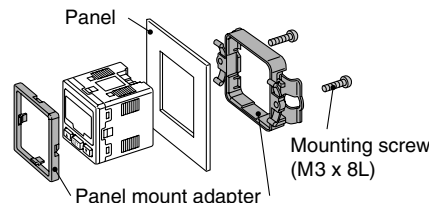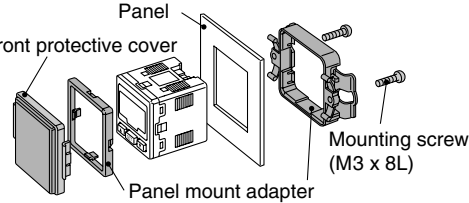Nil	None
A	Bracket 
B	Panel mount adapter 
D	Panel mount adapter + Front protective cover 

Note) The options are not attached but packed together with product for shipment.

Options / Part No.

Description	Part no.	Note
Connector cable for power supply / output (2 m)	ZS-28-A	
Bracket	ZS-28-B	With M3 x 5L (2 pcs.)
Connector for sensor connection	ZS-28-C	1 pc.
Panel mount adapter	ZS-27-C	With M3 x 8L (2 pcs.)
Panel mount adapter + Front protective cover	ZS-27-D	With M3 x 8L (2 pcs.)

Confirmation of “actual status” is important in controlling static electricity.
Easy-to-use handheld electrostatic meter

- Measuring range: ± 20.0 kV
- Minimum display unit: **0.1 kV** (± 1.0 to ± 20.0 kV)
0.01 kV (0 to ± 0.99 kV)
- Compact and Lightweight: 85 g (excluding dry cell batteries)
- Backlight for reading in the dark
- LOW battery indicator
- Peak & Bottom display function
- Zero-out function
- Auto power-off function



How to Order

IZH10-


● Option

Nil	None
H	High voltage measuring handle


Accessories and Options / Part Numbers for Individual Parts

* The ground wire and soft case are attached to the IZH series.


Ground wire (1.5 m) / Accessories
IZH-A-01

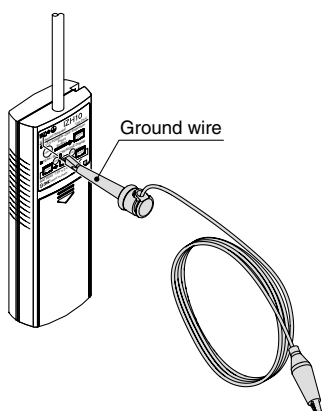

Soft case / Accessories
IZH-B-01

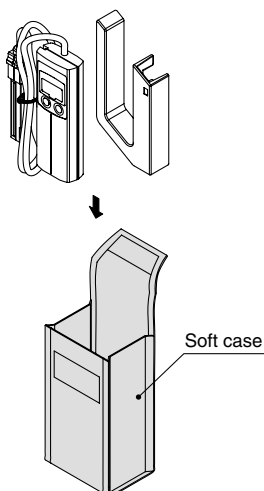

High voltage measuring handle / Option
IZH-C-01

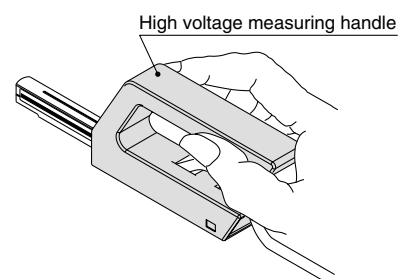


Technical Information

1. Types of Static Electricity Generation

There are various types and names of static electric generation. Basically, static electricity is generated when objects come into contact with one another or when they are separated.


Contact Charging

Static electricity generated when two objects come into contact.




Separation Charging

Static electricity that occurs when two objects that were in contact with each other are separated.




Frictional Charging

Static electricity generates when two objects are rubbed together.

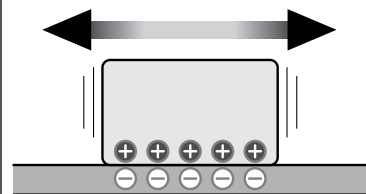


Clash Charging

Static electricity generated when objects (particles or the like) collide with strong impact.




Vapor Charging

Static electricity generates in liquid when water coming out of nozzle becomes misty.




Rolling Charging

Static electricity generated when objects roll over other objects.

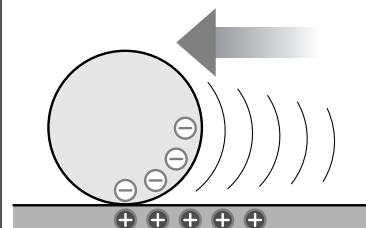


Induction Charging

When an electro-statically charged object approaches another object, static electricity occurs on the opposite side of that object.



Charging from External Ion






2. Static Electricity

● Why is static electricity generated?

① Principle of static electricity

When looking closely, you can see that all matter is composed of **atoms**. An atom has **protons and electrons that are in electrical balance**. Electrons may become separated from or attached to the atom with a small force.

Disruption of the **balance between protons and electrons leads to static electricity**.


No static electricity (0 V)	Positively charged (+)	Negatively charged (-)
		
Protons (+) and electrons (-) are balanced and no static electricity is generated.	When an electron (-) separates from the atom, the number of protons (+) exceeds the number of electrons (-), resulting in a positively charged state.	When an electron (-) attaches to an atom, the number of electrons (-) exceeds that of protons (+), resulting in a negatively charged state.

(Note) 3 electrons are mentioned in the figure, but the number of electrons varies depending on the atom.

● Causes of generating static electricity

① Contact charging

When 2 objects come in contact with each other, electrons can move between the objects. When the objects are suddenly separated under this condition, the atoms are polarized and static electricity is generated.

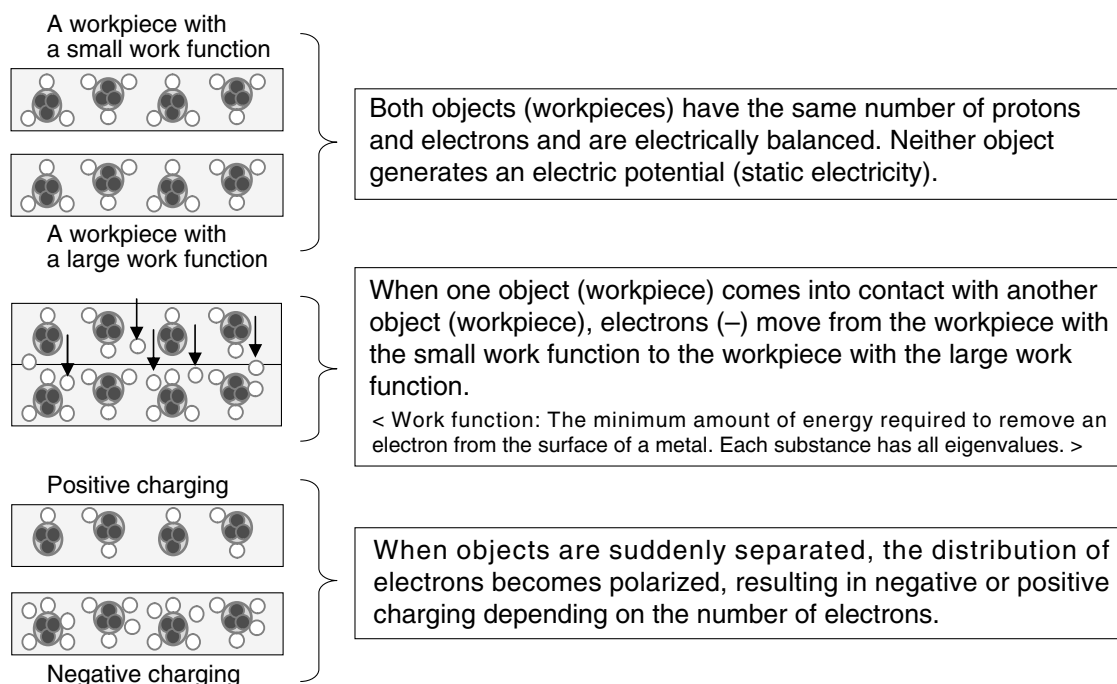

Electric Polarity and the Amount of Electric Charge

● Triboelectric series

The “electric polarity” and “amount of electric charge” when 2 objects come into contact with each other, are shown in the **triboelectric series**.



Human body
Glass
Mica
Nylon
Wool
Silk
Aluminum
Polyester
Paper
Cotton
Steel
Copper
Rubber
Polyurethane
Polypropylene
Vinyl chloride
Silicon
Fluororesin

How to read the triboelectric series

1: Electric polarity

The materials mentioned in the upper part of the triboelectric series are charged positively and those mentioned in the lower part are charged negatively.

Example 1: Glass (+) Polyester (–)

Example 2: Polyester (+) Fluororesin (–)

2: Electric charge


As the distance between 2 materials becomes greater, the amount of charge becomes larger.

Example 1: Amount of charge between the human body and nylon (Small)

Example 2: Amount of charge between the human body and polyurethane (Large)

② Induction charging


Induction charging is static electricity that is generated when a charged object gets close to another object without contacting it. This static electricity is difficult to detect because the objects do not come into contact with each other.

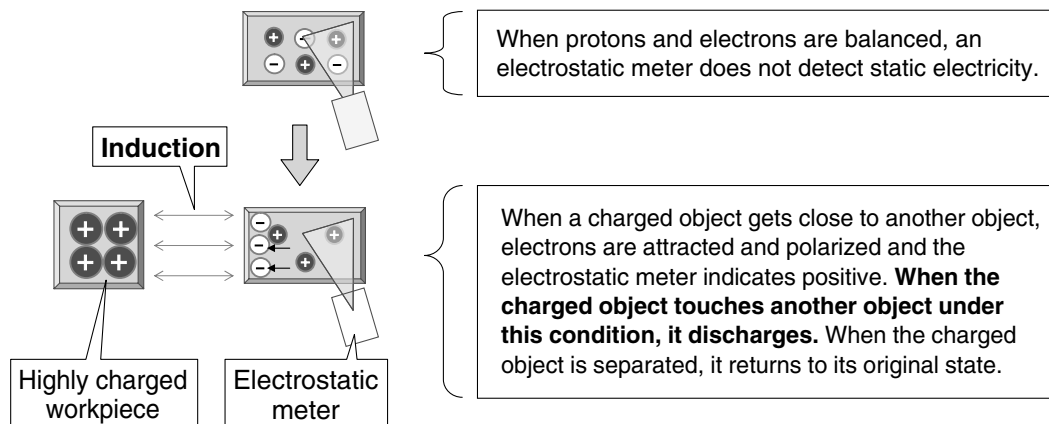


Static Electricity (continue)

Examples of Failures due to Induction Charging


● Device Breakdown 1



1) An uncharged device has no electrical polarization.




2) When a vacuum pad that has been charged due to repeated operations gets close to the device, static induction occurs. This figure shows that electrons move toward the electrode: the chip and its surroundings are positively charged.




3) When the device is mounted on a circuit board, electrostatic discharge occurs. In this case, a **conductive rubber pad** needs to be used.


● Device Breakdown 2




1) An uncharged device has no electrical polarization.




2) When an operator gets close to the device, induction charging occurs. The operator side of the device is negatively charged and the other side is positively charged.



3) When the device is grounded under this condition, static electricity is discharged. Electrons (–) flow into the device from the ground.



4) If the device is insulated, it becomes negatively charged when the operator leaves the device due to the remaining electrons.



5) When the device is once again grounded, electrostatic discharge occurs again. Electrons (–) flow out.


● Ion charging

Equipment using ultraviolet light etc. may generate ions.

When those ions become attached to workpieces, workpieces become charged.

What is an ion?

- An ion is an electrically charged atom or molecule.
- The ionizer positively or negatively ionizes molecular oxygen (oxygen atoms) and molecular nitrogen (nitrogen atoms) in the air.

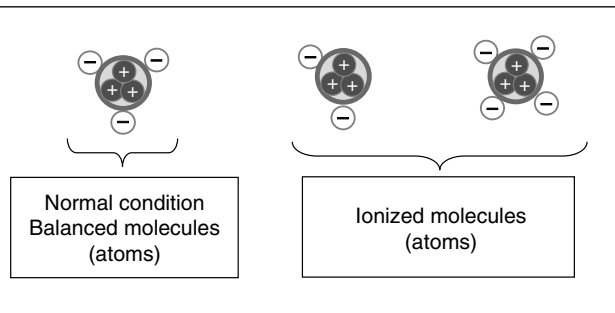

3. Countermeasures against Static Electricity

● Prevents static electricity from being generated.

- ① **Proper selection of materials that come into contact with each other (Utilizing the triboelectric series)**
- ② **Reduction of the contact area**
Generation of static electricity increases as the contact area increases. Equipment designs with less contact area are required.
- ③ **Reduction in the frequency with which objects come into contact with each other**
Static electricity accumulates when objects come into contact with each other repeatedly. Reduce the frequency with which objects come into contact with each other to reduce the generation of static electricity.
- ④ **Control of capacitance**
Static electricity voltage fluctuates with capacitance. Capacitance needs to be controlled to prevent static electricity from increasing unnecessarily.

Static electricity voltage and capacitance

● Static electricity voltage

Static electricity voltage can be calculated using the formula below.


$$\text{Voltage (V)} = \text{Quantity of Electric Charge (Q)} / \text{Capacitance (C)}$$

When the quantity of electric charge is constant, the voltage fluctuates with capacitance.

Example: When capacitance decreases, voltage increases.

● Capacitance (C)

The capacity to store static electricity between two objects. The capacitance between flat plates increases in proportion to the area (S) and decreases when the distance (d) between the flat plates becomes larger.



Example: The static electricity voltage of a workpiece on the table increases when the workpiece is lifted with a lifter because the capacitance becomes smaller.

● Prevent objects from being charged with static electricity.

Even if static electricity is generated, prevent objects from being charged to the extent that problems may result. Appropriate measures need to be taken, depending on the applications.

① Grounding

Grounding is a fundamental countermeasure against static electric. However, grounding is sometimes not complete due to insulation from lubricating oils, and that grounding is not deep enough in the ground, therefore, it is necessary to confirm the grounding.


② Humidity control

Humidity is controlled by humidifiers and such.

Caution: Humidifiers may not be effective for devices that obtain a high temperature.

③ Conductive products

Caution: Conductive products cannot discharge static electricity without grounding.

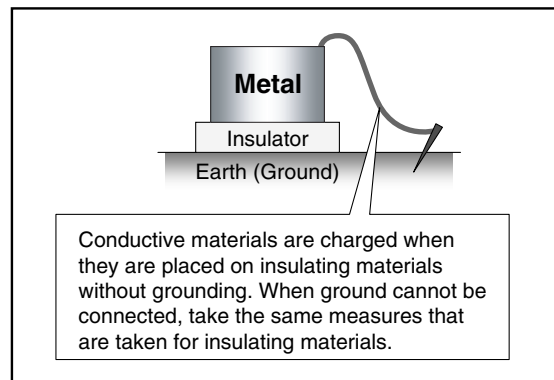

④ Removing static electricity with ionizers, etc.

● Difference in materials

Conductive materials

Conductive materials can discharge static electricity immediately with grounding. When surface treatments such as anodization and the like are applied, conductive materials will become insulated and grounding will be ineffective.

Insulated materials

Insulated materials cannot discharge static electricity even if they are grounded. To discharge static electricity, switch to using conductive materials, use humidity control or a surface active agent, or install an ionizers, etc.

● Electrostatic features of conductive and insulated materials

