

PSOC™ Automotive Multitouch generation 7L

Datasheet Summary

Note that this is a Summary Datasheet. To access the full version of this datasheet, register in [My Infineon Collaboration Platform \(MyICP\)](#).

Features

- Automotive Electronics Council (AEC)-Q100 qualified
- Single-chip system solution that integrates touch controller with MCU functions
- Target Application
 - Entry and mid-level central information display (CID) systems
- 32-bit MCU subsystem
 - 48-MHz Arm® Cortex®-M0+ CPU
 - 12-bit SAR ADC for system monitoring (voltage, temperature) and other features (such as day/night sensor)
 - Four timer counter pulse width modulators (TCPWMs)
 - Three serial communication blocks (SCBs) that can be individually configured as SPI/I²C/UART
 - Up to 48 KB flash for user-specific system MCU functionality
 - Up to 4 KB SRAM for user-specific system MCU functionality
 - Up to 29 programmable GPIO pins with interrupt functionality
- Multitouch capacitive touchscreen controller
 - Register-configurable
 - Noise-suppression technologies for display and EMI
 - Effective 20 V drive for higher signal-to-noise ratio (SNR)^[1]
 - Auto armor technology improves both electromagnetic emissions and immunity
 - External display synchronization
 - Water rejection and wet-finger tracking using dual sense capability
 - Multitouch glove with automatic mode switching
 - Ten fingers with thin glove (≤ 1 mm thick)
 - Two fingers with thick glove (≤ 5 mm thick)
 - Large object rejection
 - Automatic baseline tracking to environmental changes
 - Low-power look-for-touch mode
 - Field upgrades via bootloader
 - Touchscreen sensor self-test
 - Low-power CAPSENSE™ wake-up button with power consumption of 50 µA
 - Low-power wake-on-touchscreen with power consumption of 120 µA

Note

1. Effective voltage when using 17 multi-phase TX and 5 V V_{CCTX} supply.

Features

- System performance (configuration dependent)
 - Screen sizes up to 11-inch diagonal
 - 5 mm electrode pitch; 8:3 aspect ratio
 - Screen sizes up to 12.3-inch diagonal
 - 5.7 mm electrode pitch; 8:3 aspect ratio
 - Up to 72 sense pins supporting different aspect ratios, up to 1200 intersections (46 × 26)
 - Reports up to ten fingers
 - Small finger support down to 4 mm
 - Refresh rate up to 250 Hz; other rates configurable
 - TX frequency up to 350 kHz
- Power (configuration-dependent)
 - 1.71 V to 1.95 V and 3.0 V to 5.5 V logic and digital I/Os supply
 - 3.0 V to 5.5 V analog supply
 - 20 mW average power
 - 20 µW typical Deep Sleep power
- Sensor and system design (configuration-dependent)
 - Supports a variety of touchscreen sensors and stackups
 - Manhattan, diamond
 - Sensor-on-lens (SOL)
 - On-cell
 - Plastic (PET) and glass-sensor substrates
 - LCD, AMOLED, and IPS displays
 - Metal mesh
- Communication interface
 - I²C slave at 100 kbps, 400 kbps, 1 Mbps, and 3.4 Mbps
 - SPI slave bit rates up to 8 Mbps
- Development and debug environment
 - Arm® MDK for system MCU
 - Touch tuning host emulator (TTHE) to configure touch
 - MTK for debugging
 - PSOC™ programmer for programming
- Packages
 - 100-pin TQFP 14 × 14 × 1.4 mm (0.5 mm pitch)
 - 128-pin TQFP 14 × 20 × 1.4 mm (0.5 mm pitch)
- Ambient temperature range
 - Automotive-A: -40°C to 85°C
 - Automotive-S: -40°C to 105°C

Ordering information

1 Ordering information


Table 1 lists the CYAT817L touchscreen controllers.

Table 1 **Ordering information**

Product	Number of sense pins	No. of fingers	Touch only	Touch+ MCU functions	No. of GPIOs	Package	Temperature
CYAT817L-100AA72	72	10	✓	–	13	100LD TQFP	–40°C to +85°C
CYAT817L-100AS72	72	10	✓	–	13	100LD TQFP	–40°C to +105°C
CYAT817LS-100AA72	72	10	–	✓	13	100LD TQFP	–40°C to +85°C
CYAT817LS-100AS72	72	10	–	✓	13	100LD TQFP	–40°C to +105°C
CYAT817L-128AA72	72	10	✓	–	29	128LD TQFP	–40°C to +85°C
CYAT817L-128AS72	72	10	✓	–	29	128LD TQFP	–40°C to +105°C
CYAT817LS-128AA72	72	10	–	✓	29	128LD TQFP	–40°C to +85°C
CYAT817LS-128AS72	72	10	–	✓	29	128LD TQFP	–40°C to +105°C

Ordering information

1.1 Ordering code definitions

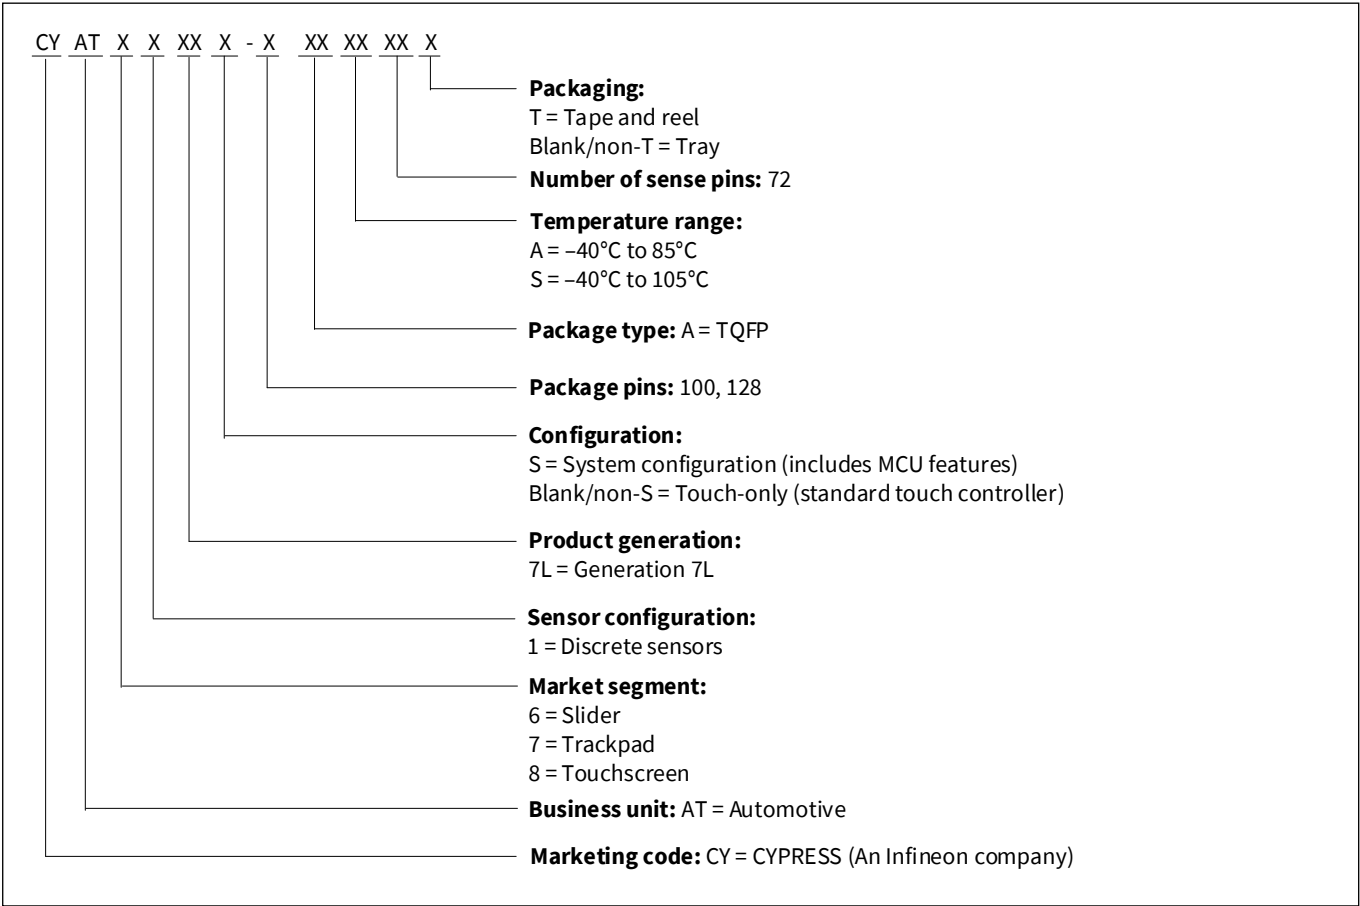

Revision history

Revision history

Document revision	Date	Description of changes
**	2022-07-26	Initial release.
*A	2024-05-21	Updated Package information in Features . Updated Package information in Table 1 . Updated template. Updated to reflect correct metadata.
*B	2024-08-02	No content updates. Only ECN metadata updated.
*C	2026-03-09	Updated PSoC™ to PSOC™.

Trademarks

All referenced product or service names and trademarks are the property of their respective owners.

PSOC™, formerly known as PSoC™, is a trademark of Infineon Technologies. Any references to PSoC™ in this document or others shall be deemed to refer to PSOC™.

Edition 2026-03-09

Published by

Infineon Technologies AG

Am Campeon 1-15

85579 Neubiberg

Germany

**© 2026 Infineon Technologies AG.
All Rights Reserved.**

Do you have a question about this document?

Email:

erratum@infineon.com

Document Reference Number

002-35927 Rev. *C

IMPORTANT NOTICE

Products which may also include samples and may be comprised of hardware or software or both ("Product(s)") are sold or provided and delivered by Infineon Technologies AG and its affiliates ("Infineon") subject to the terms and conditions of the frame supply contract or other written agreement(s) executed by a customer and Infineon or, in the absence of the foregoing, the applicable Sales Conditions of Infineon. General terms and conditions of a customer or deviations from applicable Sales Conditions of Infineon shall only be binding for Infineon if and to the extent Infineon has given its express written consent.

For the avoidance of doubt, Infineon disclaims all warranties of non-infringement of third-party rights and implied warranties such as warranties of fitness for a specific use/purpose or merchantability.

Infineon shall not be responsible for any information with respect to samples, the application or customer's specific use of any Product or for any examples or typical values given in this document.

The data contained in this document is exclusively intended for technically qualified and skilled customer representatives. It is the responsibility of the customer to evaluate the suitability of the Product for the intended application and the customer's specific use and to verify all relevant technical data contained in this document in the intended application and the customer's specific use. The customer is responsible for properly designing, programming, and testing the functionality and safety of the intended application, as well as complying with any legal requirements related to its use.

Unless otherwise explicitly approved by Infineon, Products may not be used in any application where a failure of the Products or any consequences of the use thereof can reasonably be expected to result in personal injury. However, the foregoing shall not prevent the customer from using any Product in such fields of use that Infineon has explicitly designed and sold it for, provided that the overall responsibility for the application lies with the customer.

Infineon expressly reserves the right to use its content for commercial text and data mining (TDM) according to applicable laws, e.g. Section 44b of the German Copyright Act (UrhG). If the Product includes security features: Because no computing device can be absolutely secure, and despite security measures implemented in the Product, Infineon does not guarantee that the Product will be free from intrusion, data theft or loss, or other breaches ("Security Breaches"), and Infineon shall have no liability arising out of any Security Breaches.

If this document includes or references software:

The software is owned by Infineon under the intellectual property laws and treaties of the United States, Germany, and other countries worldwide. All rights reserved. Therefore, you may use the software only as provided in the software license agreement accompanying the software. If no software license agreement applies, Infineon hereby grants you a personal, non-exclusive, non-transferable license (without the right to sublicense) under its intellectual property rights in the software (a) for software provided in source code form, to modify and reproduce the software solely for use with Infineon hardware products, only internally within your organization, and (b) to distribute the software in binary code form externally to end users, solely for use on Infineon hardware products. Any other use, reproduction, modification, translation, or compilation of the software is prohibited. For further information on the Product, technology, delivery terms and conditions, and prices, please contact your nearest Infineon office or visit <https://www.infineon.com>.