

5G PHANTOM ON-GROUND PLANE SERIES

5G low profile on-ground plane antennas 617-7125 MHz/698-7125 MHz

The 5G Phantom on-ground plane antenna series cover either 617-7125 or 698-7125 MHz and are both available in black or white.

5G Phantom antennas deliver global cellular coverage, even for regions where the lower 600 MHz band is required. They offer high levels of average efficiency, over 80% up to 4200 MHz, and gain up to 6.0 dBi in an IP67-rated, compact form factor.

A direct-mount, threaded stud, with superior quality and integrated N-female connector provides tamper-resistant installation. The direct coaxial connection ensures performance remains consistent, even at the higher frequencies, avoiding the performance losses of other mounting methods.

FEATURES AND BENEFITS

- **Based on our popular Phantom series** – Our highly-popular Phantom antennas are widely used in applications such as utilities, vehicular, public safety, and other IoT installations
- **Global cellular coverage** – Available in 617-7125 MHz and 698-7125 MHz variants
- **Optimized** – Optimal gain directed at just above the horizon for superior connectivity with exceptional efficiency levels
- **Minimum gain ripple** - Around the horizon (Azimuth Plane) there is excellent consistency with minimal shifting gain; unlike competitors
- **Connectivity where you need it** – Uniform azimuth patterns reduce the chance of signal drop outs
- **Rugged, robust construction** – Tamper-resistant and highly durable with IP67-rated enclosure and UL 94 flammability rating

ELECTRICAL SPECIFICATION

Model Name	FTRA6171M5PB-001/FTRA6171M5PW-001							
Operating Frequency (MHz)	617-698	698-960	1427-1695	1695-2700	3300-4200	4400-6000	6000-6500	6500-7125
VSWR (Max)	<2.5:1	<2.0:1	<4.0:1	<2.0:1	<2.0:1	<2.5:1	<3.0:1	
Peak Gain (Average), dBi	4.5	4.5	5.0	5.5	6.0	6.0	6.5	7.5
Ave. Gain at Theta 80 deg. (10 deg above Horiz.); dBi	0.3	0.5	-	1.5	1.0	.7	-	-
Efficiency (%), Avg	>70	>80	> 50	>80	>80	>80	-	-
	FTRA6971M5PB-001/FTRA6971M5PB-001							
Operating Frequency (MHz)	N/A	698-960	1427-1695	1695-2700	3300-4200	4400-6000	6000-6875	6875-7125
VSWR (Max)	N/A	<2.3:1	<3.0:1	<2.0:1	<2.0:1	<2.5:1	<3.0:1	
Peak Gain (Average), dBi	N/A	4.3	5.4	5.7	6.2	5.6	5.7	7.2
Typ. Ave. Gain at Theta 80 deg. (10 deg above Horiz.); dBi	N/A	0.3	1.5	1.6	1.9	2.0	-	
Efficiency (%), Avg	N/A	>80	>80	>80	>80	>75	-	
Polarization	Vertical							
Azimuth (Horizontal) Beamwidth	360˚							
Nominal Impedance (Ohms)	50							
Max Power @ Ambient 25˚C (W)	100		20					

MECHANICAL SPECIFICATION

Dimensions – H x D Bottom-D Top – mm (inches)	FTRA6171M5Pxx: 92 x 45 (3.62 x 1.77)	FTRA6971M5Pxx: 84 x 45-32 (3.78 x 1.81-1.26)
Weight – kg (lbs.)	FTRA6171M5Pxx: 0.145 (0.32)	FTRA6971M5Pxx: 0.138 (0.30)
Radome Material	Polycarbonate	
Connector Type	Type N (female)	

ENVIRONMENTAL SPECIFICATION

Operating Environment (Indoor or Outdoor)	Outdoor
Operating Temperature – °C (°F)	-55 to +85°C (-67 to +185°F)
Storage Temperature – °C (°F)	-55 to +85°C (-67 to +185°F)
Ingress Protection Rating	IP67
Flammability Rating	UL94 V0
Material Substance Compliance	RoHS

CONFIGURATION

PART NUMBER	OPERATING FREQUENCY	COLOR
FTRA6171M5PB-001	617 – 7125 MHz	BLACK
FTRA6171M5PW-001	617 – 7125 MHz	WHITE
FTRA6971M5PB-001	698 – 7125 MHz	BLACK
FTRA6971M5PW-001	698 – 7125 MHz	WHITE

MECHANICAL DRAWINGS

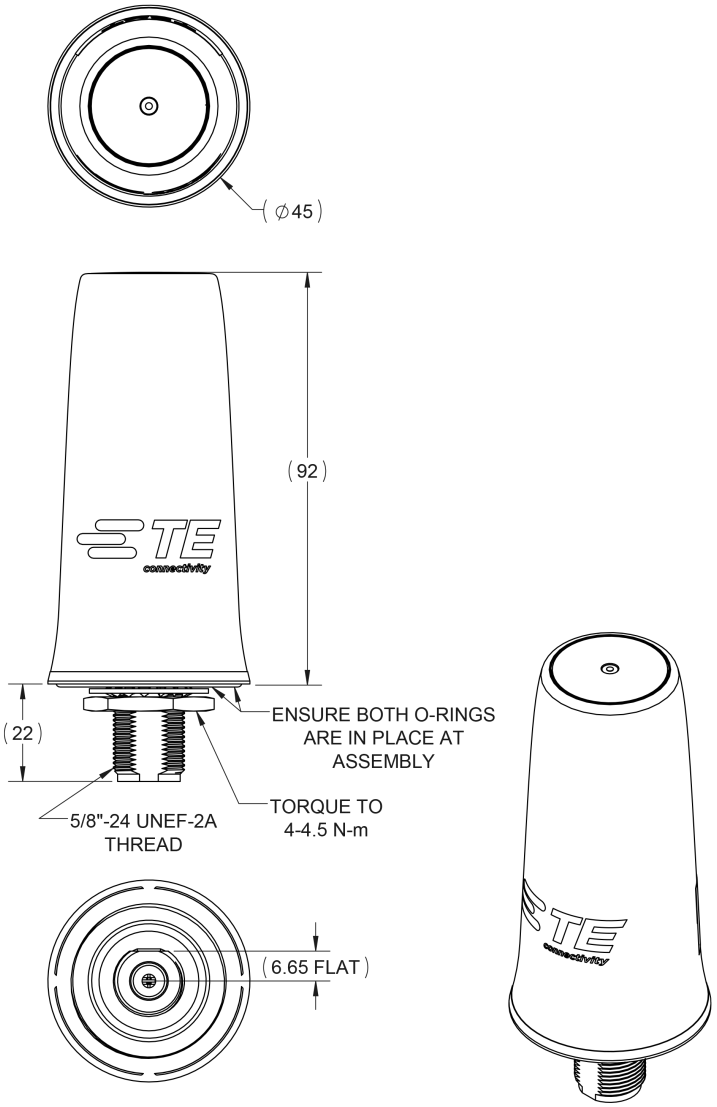


Figure 1: FTRA6171M5Px mechanical drawing



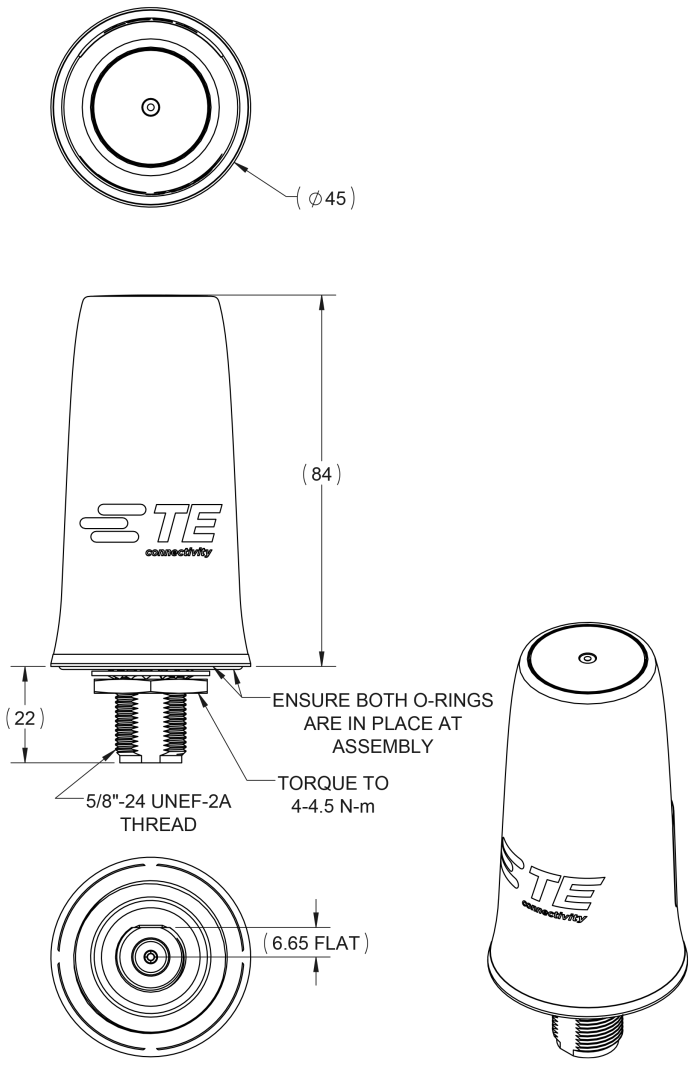


Figure 2: FTRA6971M5Px mechanical drawing

VSWR VS FREQUENCY

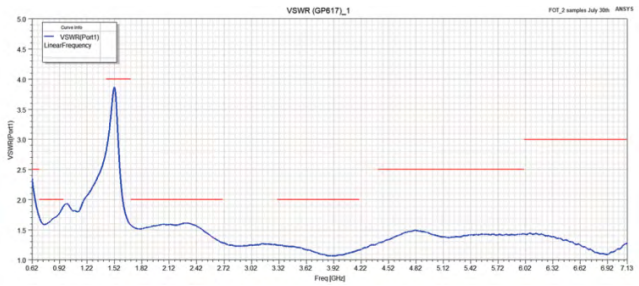


FTRA6171M5Px

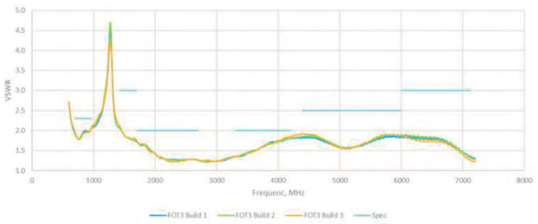


FTRA6971M5Px

PEAK GAIN VS FREQUENCY

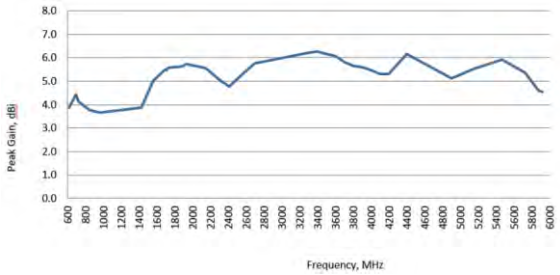


FTRA6171M5Px

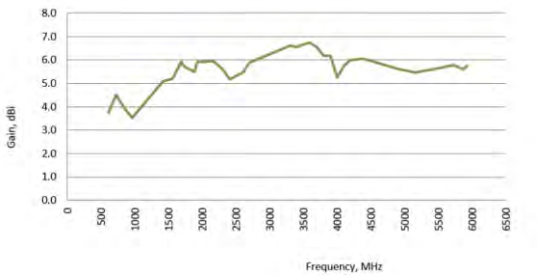


FTRA6971M5Px

RADIATED EFFICIENCY VS FREQUENCY

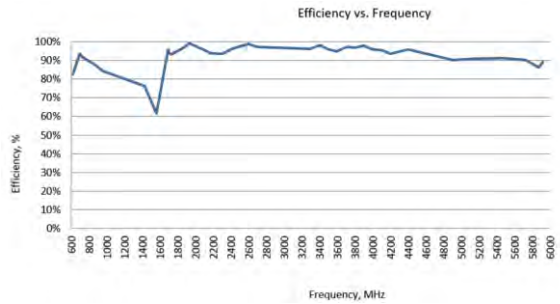


FTRA6171M5Px

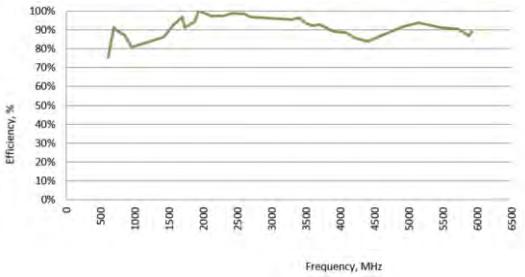


FTRA6971M5Px

GAIN RIPPLE VS FREQUENCY

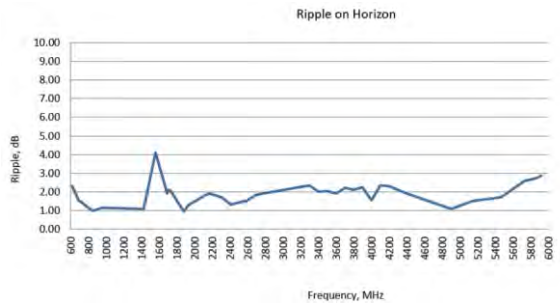


FTRA6171M5Px

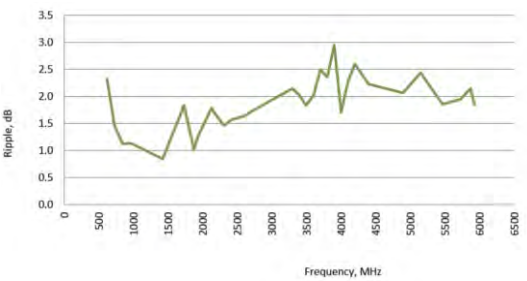


FTRA6971M5Px

RADIATION PATTERNS


617 MHz (FTRA6171M5Px)

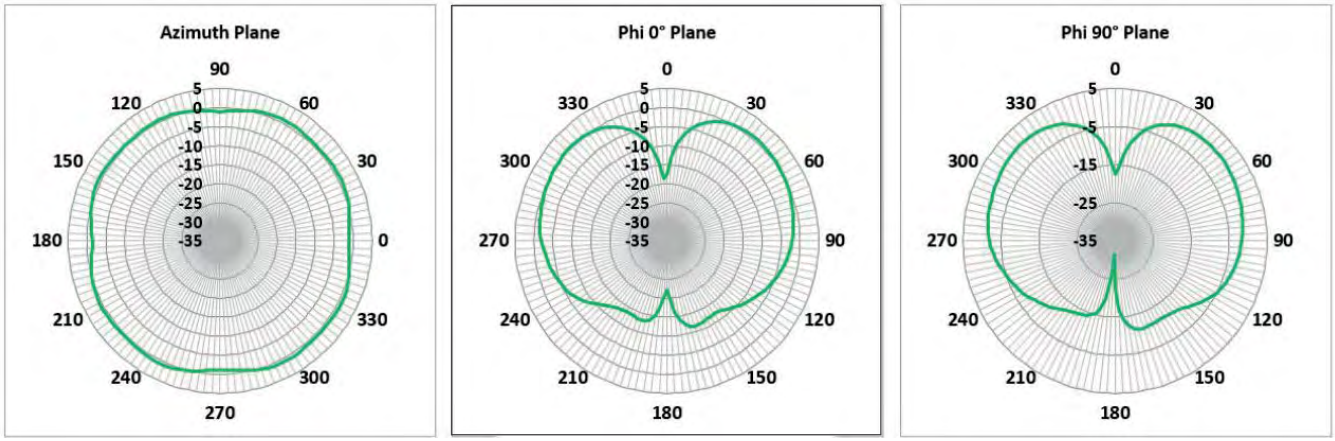


698M Hz (FTRA6171M5Px)

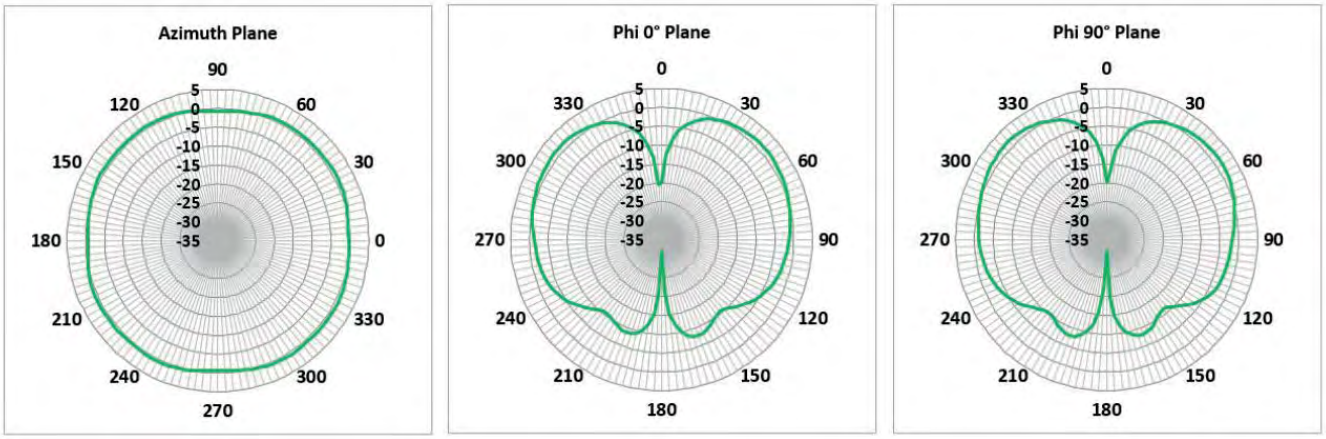


960 MHz (FTRA6171M5Px)

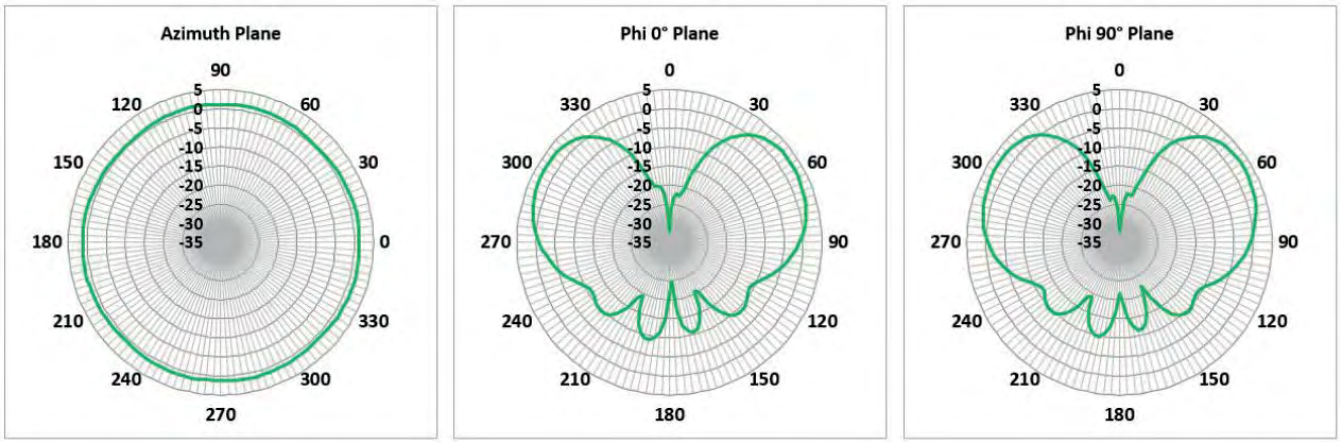


1427M Hz (FTRA6171M5Px)

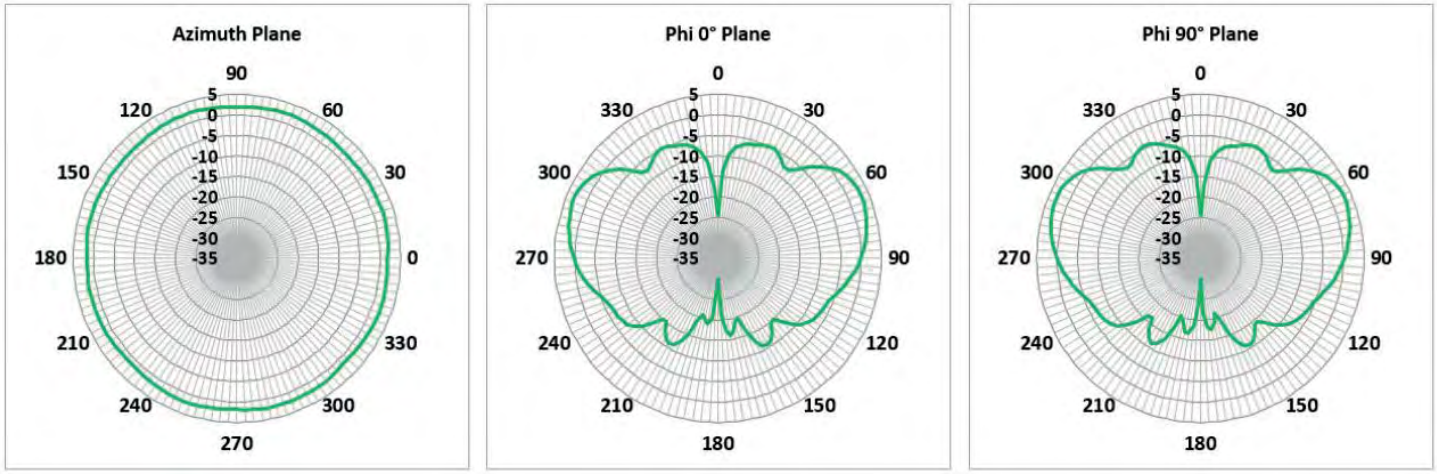


1695M Hz (FTRA6171M5Px)

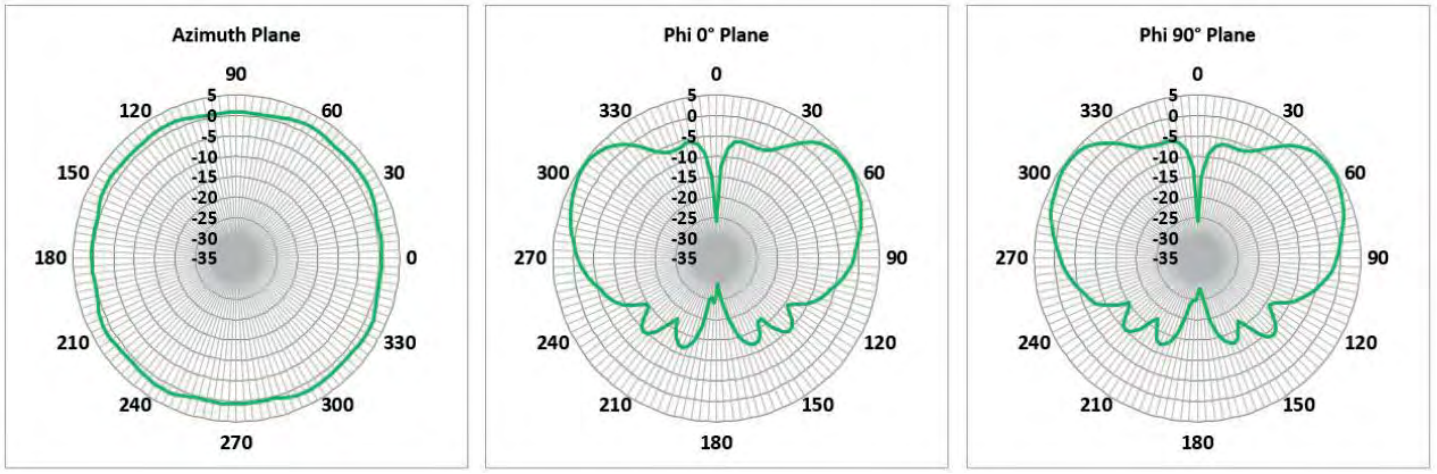


2170M Hz (FTRA6171M5Px)

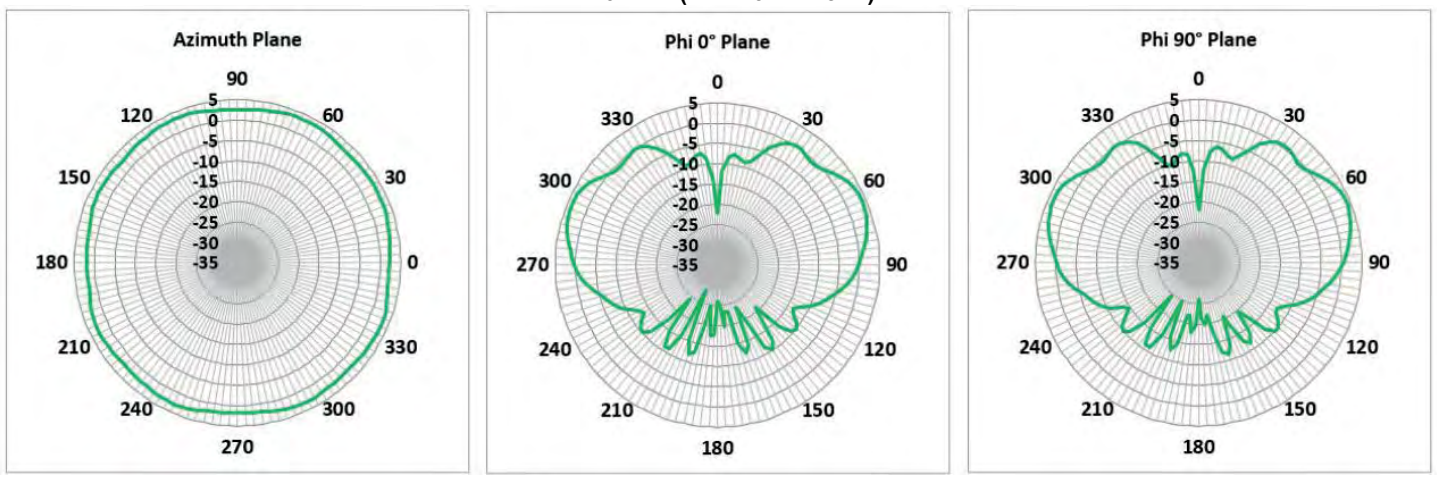


2310M Hz (FTRA6171M5Px)

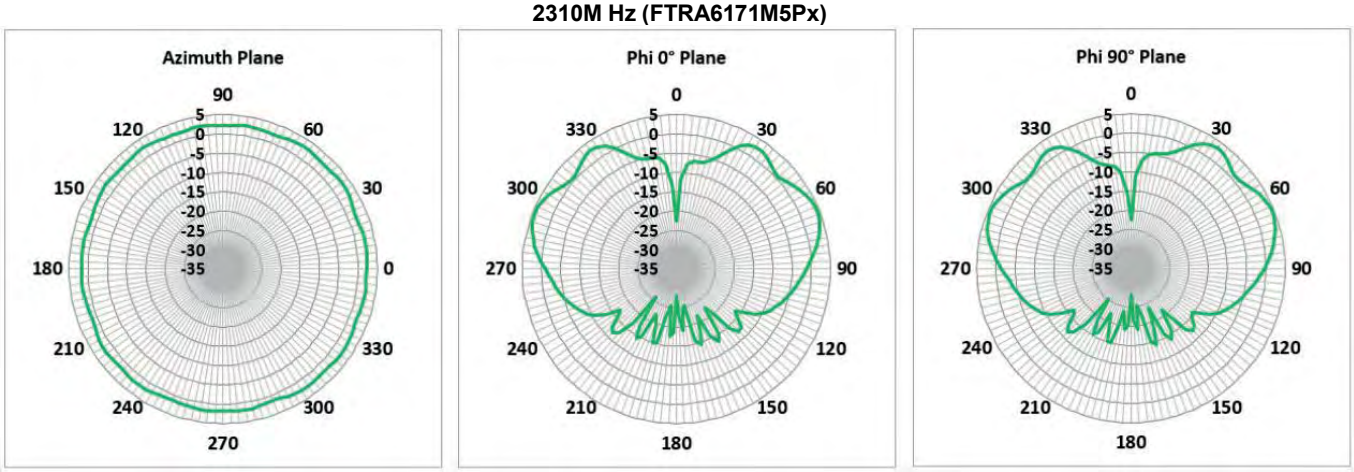


2700M Hz (FTRA6171M5Px)

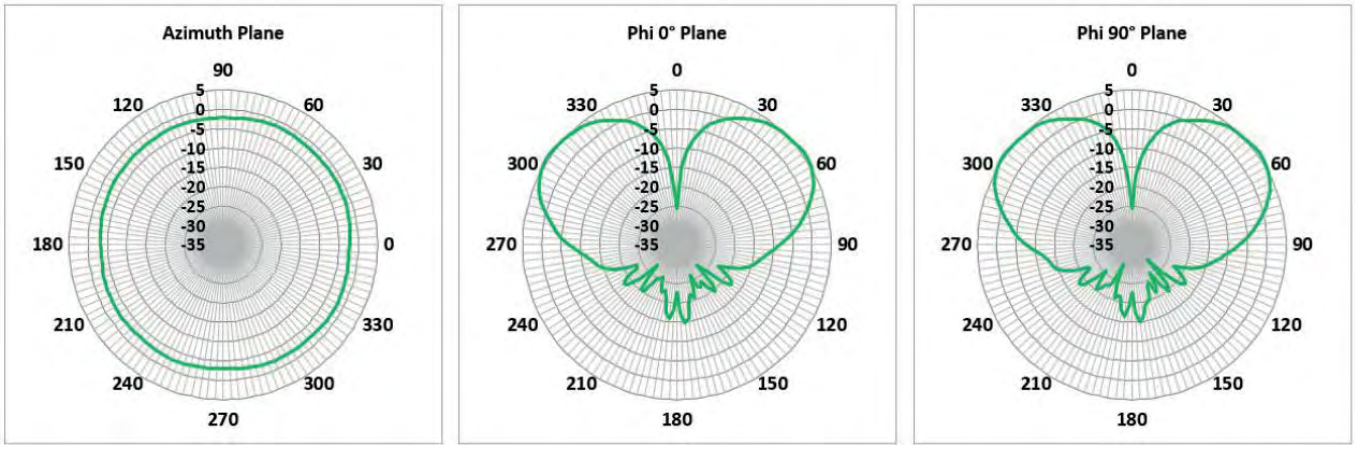


3300M Hz (FTRA6171M5Px)

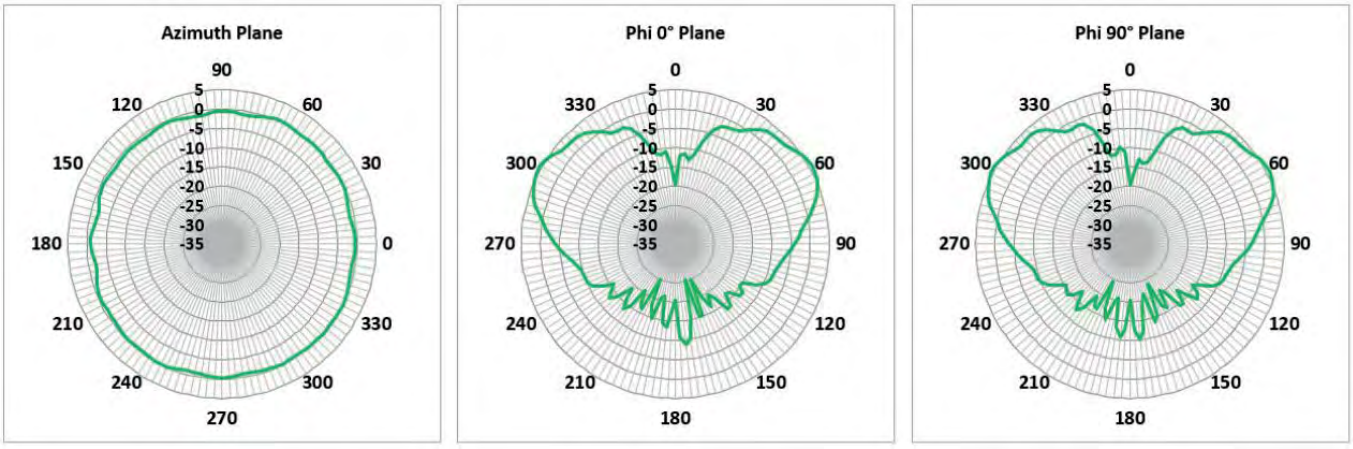


3800 MHz (FTRA6171M5Px)

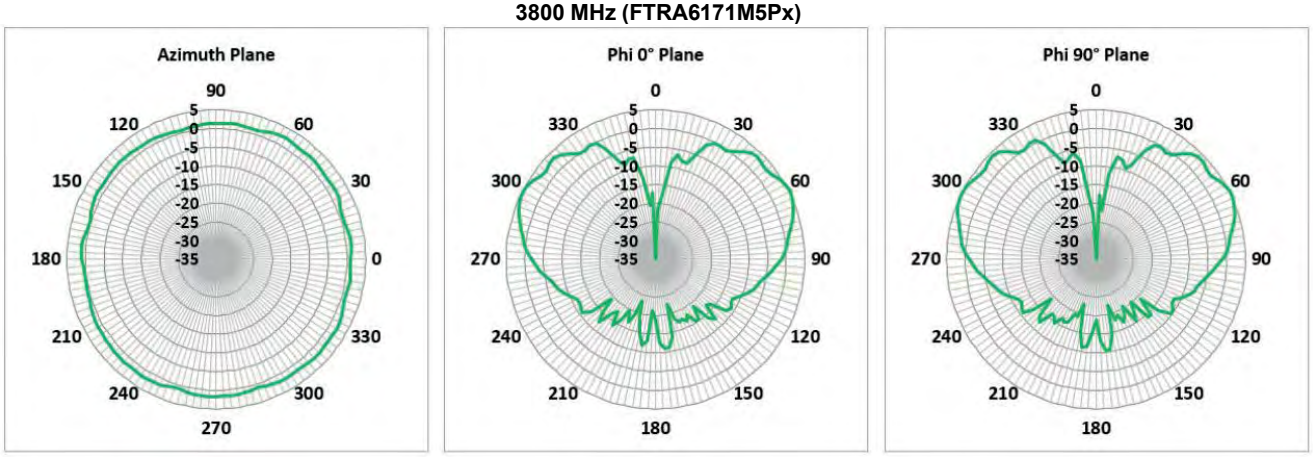


4200 MHz (FTRA6171M5Px)

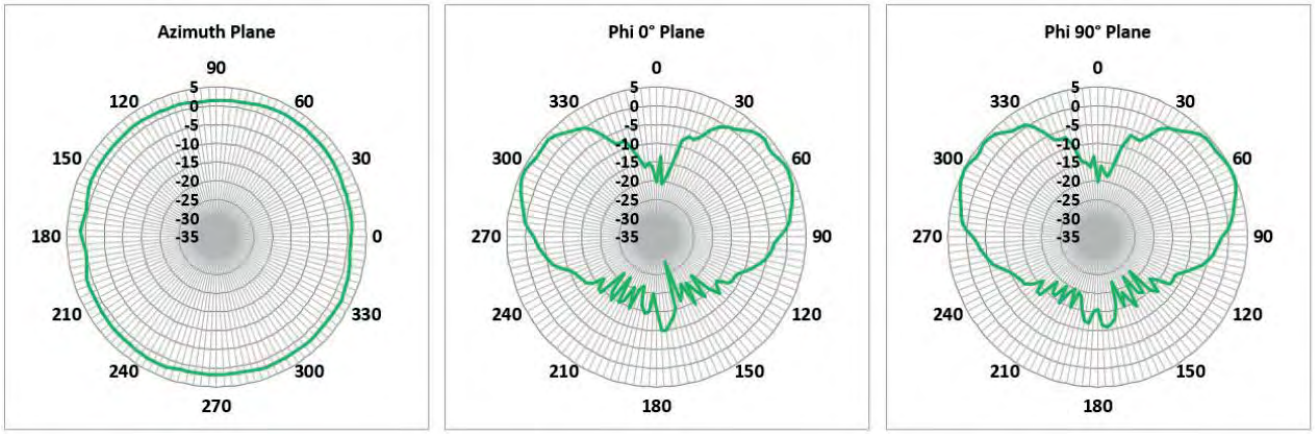


4400 MHz (FTRA6171M5Px)

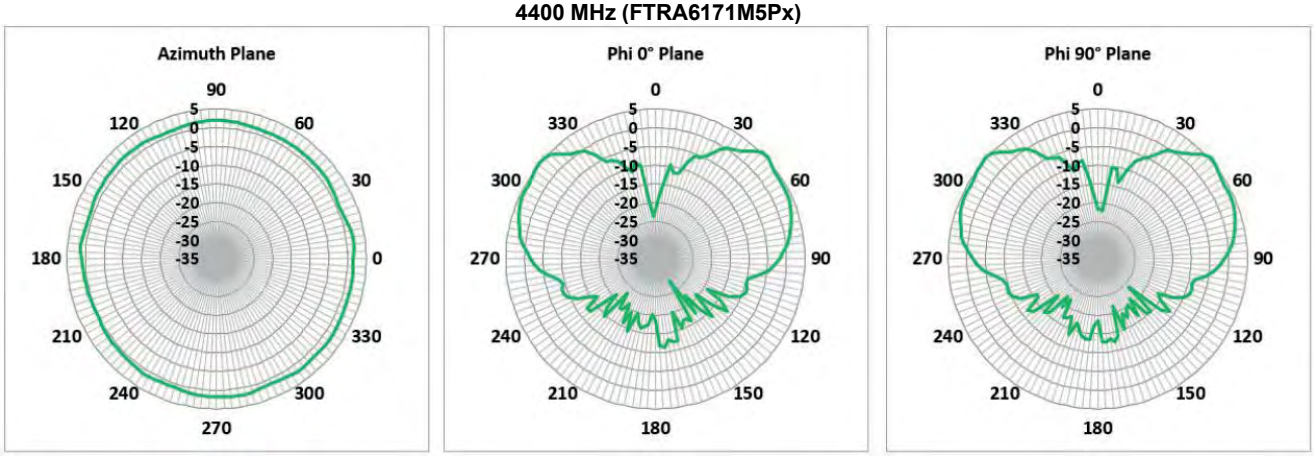


5150 MHz (FTRA6171M5Px)

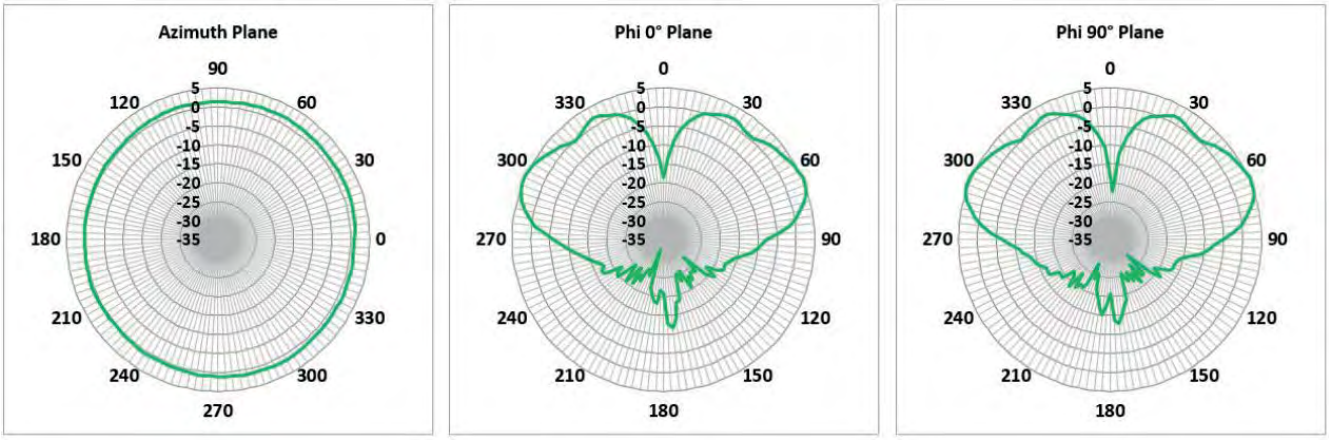

5470 MHz (FTRA6171M5Px)

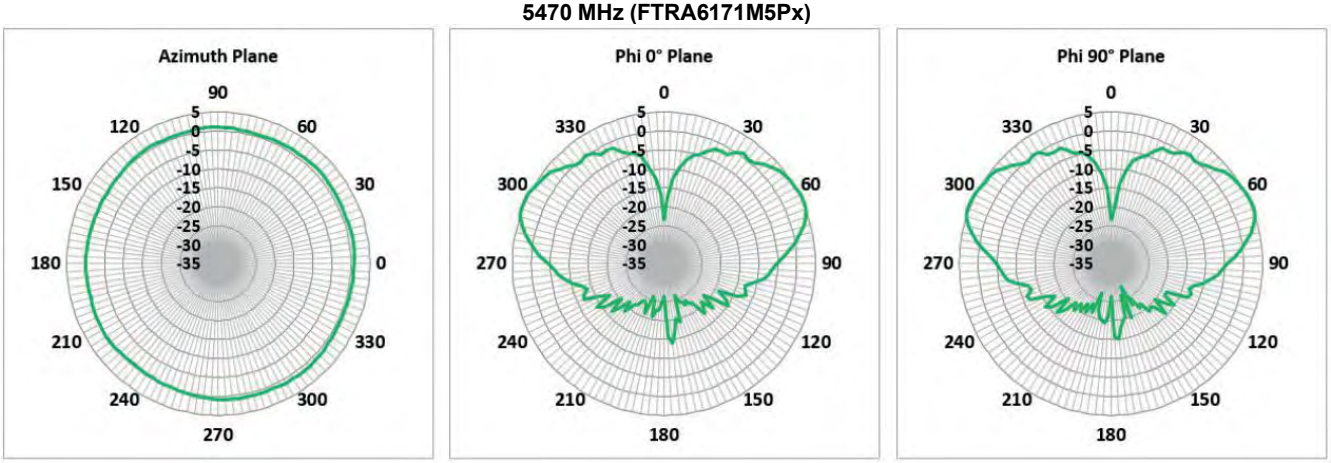


5925M Hz (FTRA6171M5Px)

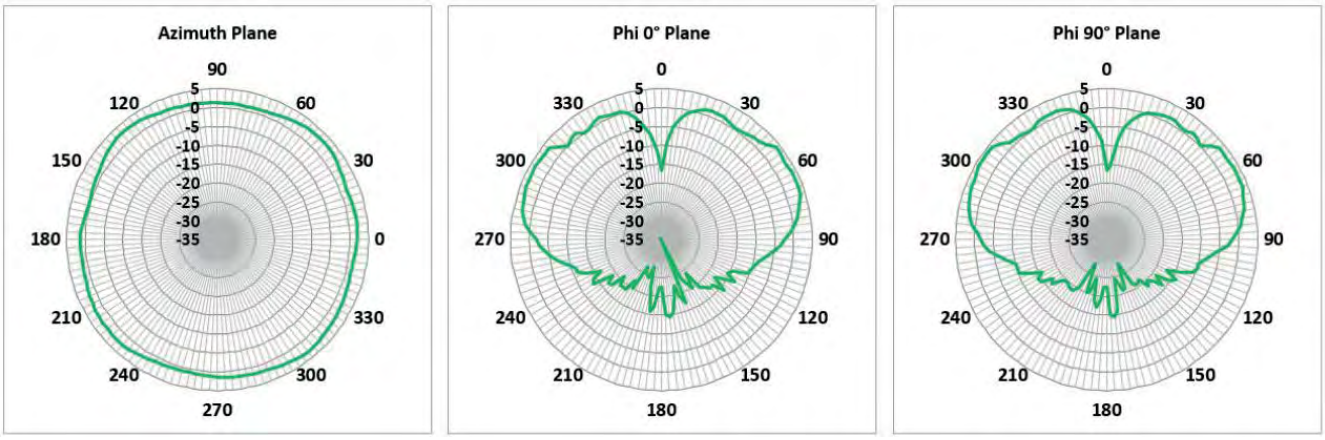


698M Hz (FTRA6971M5Px)


Theta = 80°

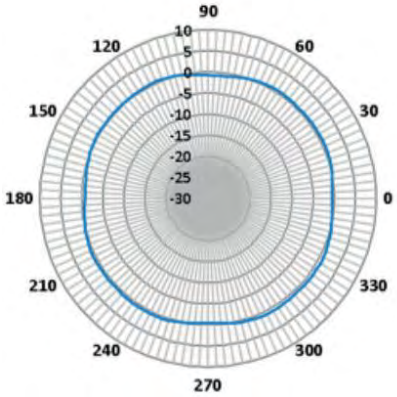

Phi = 0°

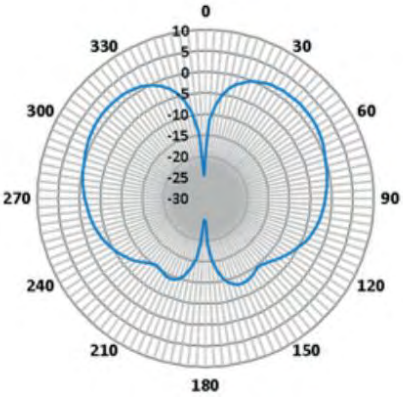


Phi = 90°

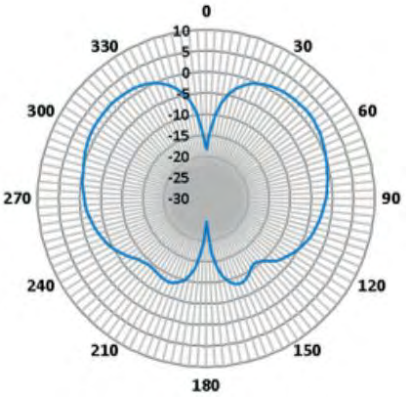


960M Hz (FTRA6971M5Px)


Theta = 80°

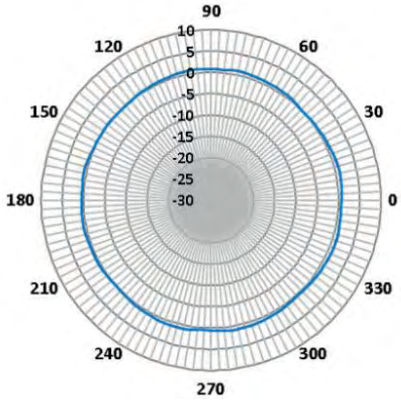

Phi = 0°

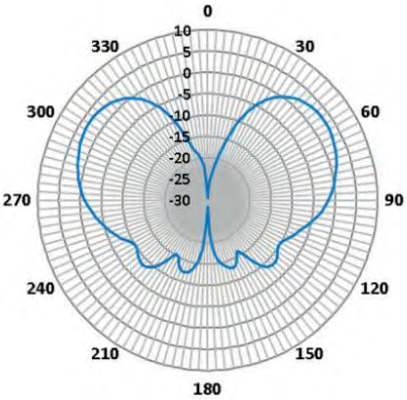


Phi = 90°

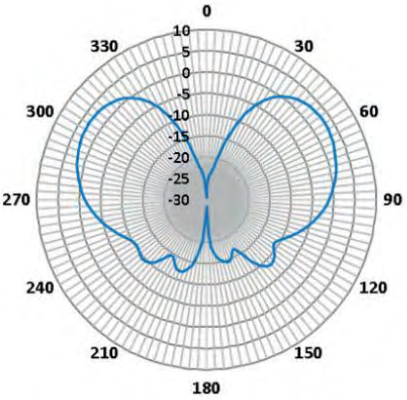


1427M Hz (FTRA6971M5Px)


Theta = 80°

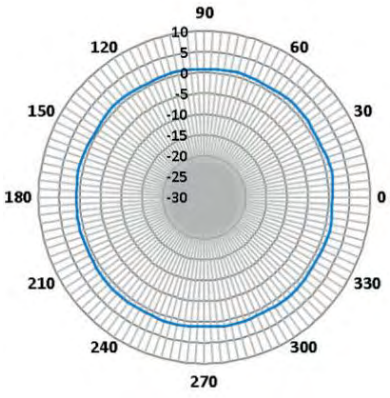

Phi = 0°

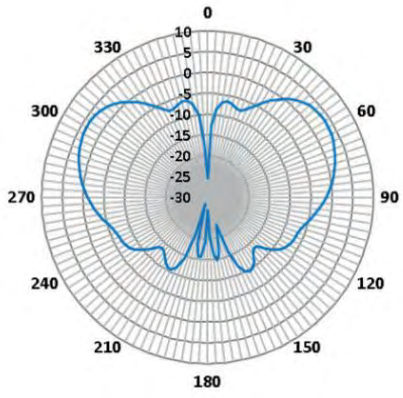


Phi = 90°

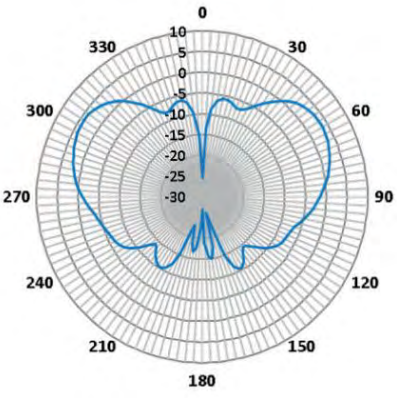


1695M Hz (FTRA6971M5Px)


Theta = 80°

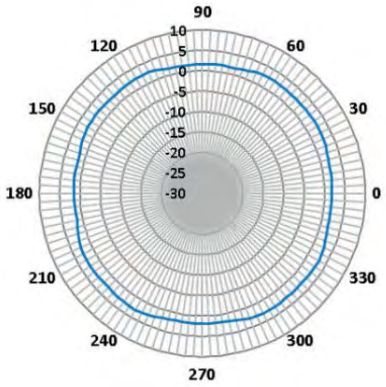

Phi = 0°

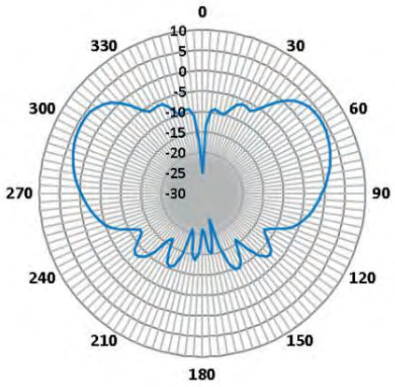


Phi = 90°

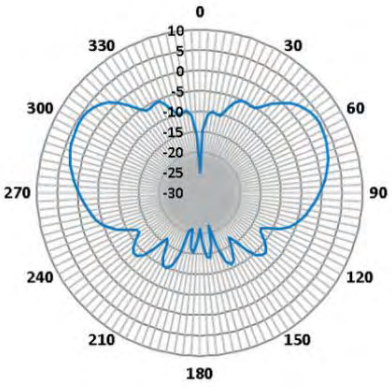


2170M Hz (FTRA6971M5Px)


Theta = 80°

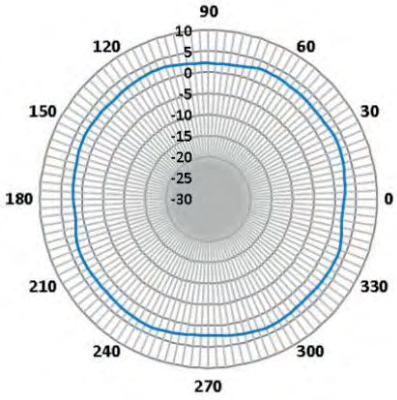

Phi = 0°

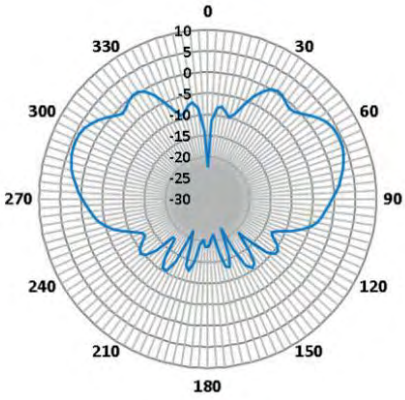


Phi = 90°

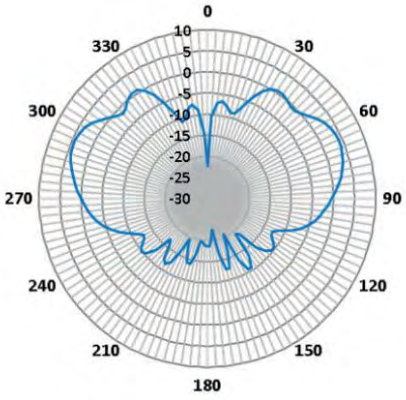


2310M Hz (FTRA6971M5Px)


Theta = 80°

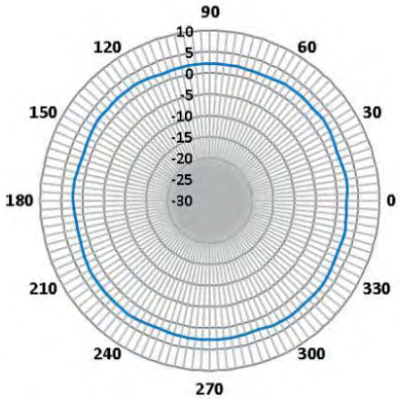

Phi = 0°

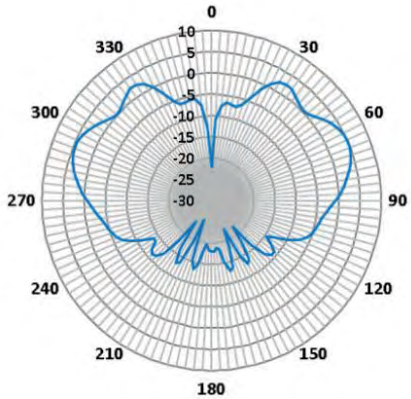


Phi = 90°

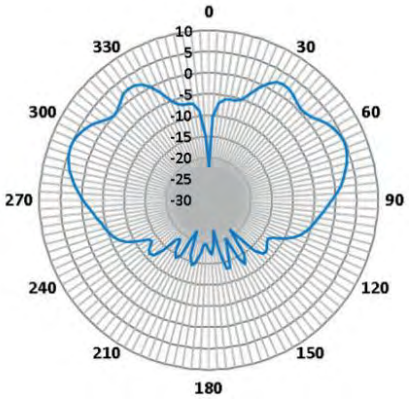


2700M Hz (FTRA6971M5Px)


Theta = 80°

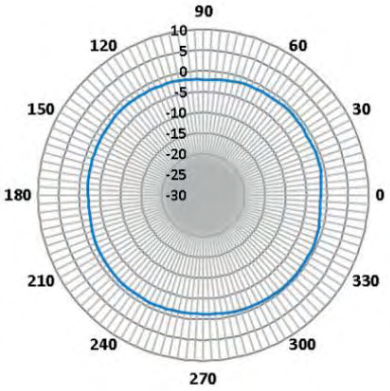

Phi = 0°

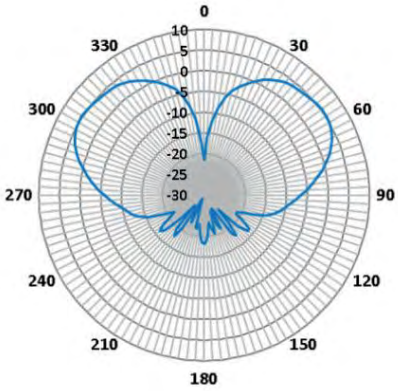


Phi = 90°

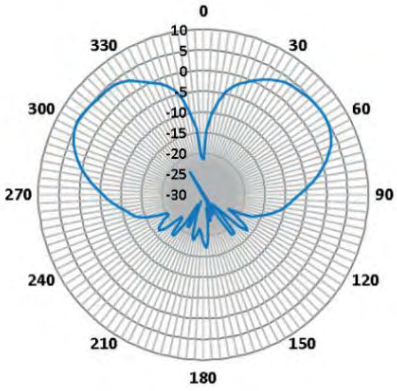


3300M Hz (FTRA6971M5Px)


Theta = 80°

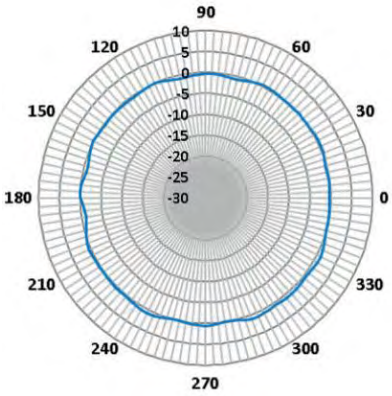

Phi = 0°

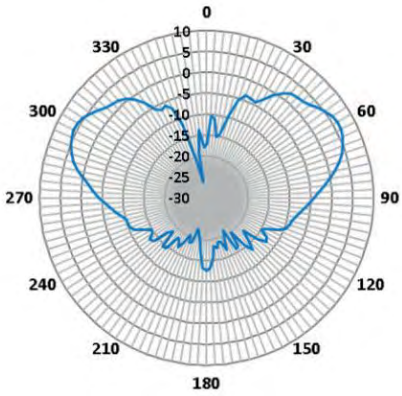


Phi = 90°

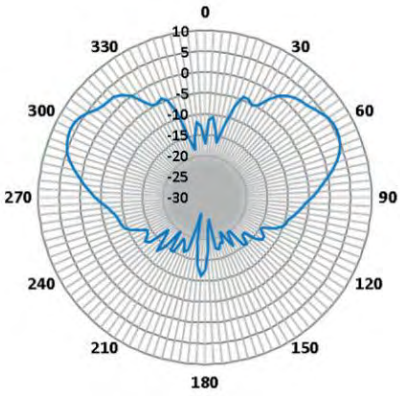


3800M Hz (FTRA6971M5Px)


Theta = 80°

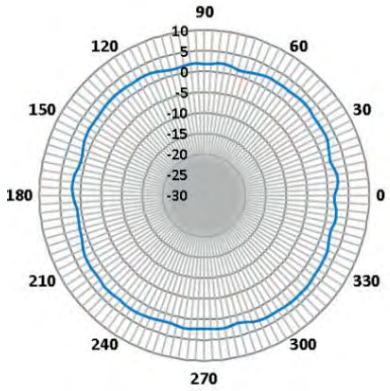

Phi = 0°

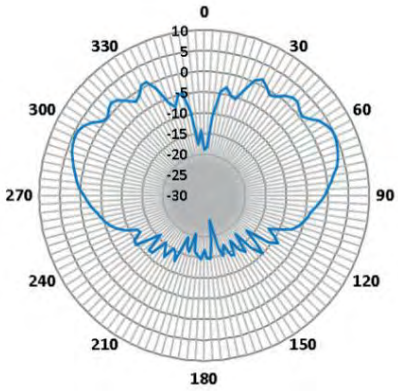


Phi = 90°

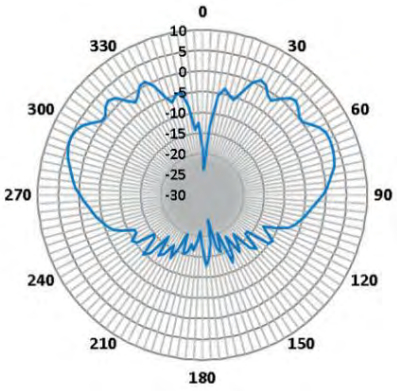


5470M Hz (FTRA6971M5Px)


Theta = 80°



Phi = 90°

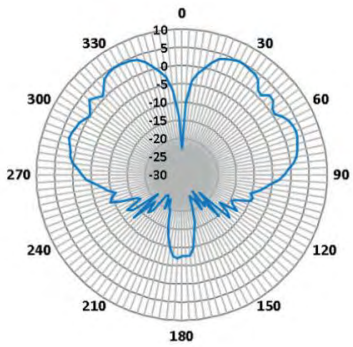


Phi = 90°

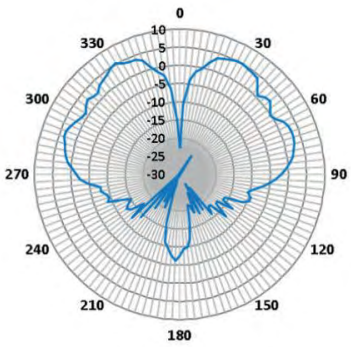


5925M Hz (FTRA6971M5Px)


Theta = 80°

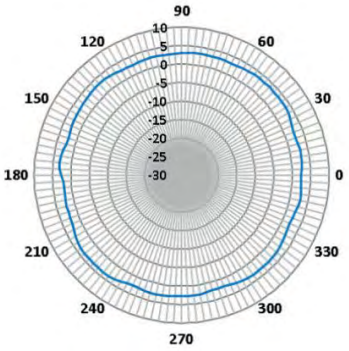

Phi = 0°

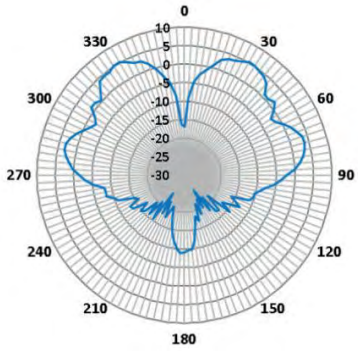

Phi = 90°

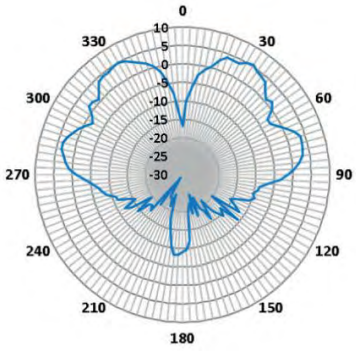

TE TECHNICAL SUPPORT CENTER

USA:	+1 (800) 522-6752
Canada:	+1 (905) 475-6222
Mexico:	+52 (0) 55-1106-0800
Latin/S. America:	+54 (0) 11-4733-2200
Germany:	+49 (0) 6251-133-1999
UK:	+44 (0) 800-267666
France:	+33 (0) 1-3420-8686
Netherlands:	+31 (0) 73-6246-999
China:	+86 (0) 400-820-6015

te.com

TE, TE Connectivity, TE connectivity (logo), and EVERY CONNECTION COUNTS are trademarks owned or licensed by the TE Connectivity plc family of companies. Other product names, logos, and company names mentioned herein may be trademarks of their respective owners.

While TE has made every reasonable effort to ensure the accuracy of the information in this document, TE does not guarantee that it is error-free, nor does TE make any other representation, warranty or guarantee that the information is accurate, complete, correct, reliable or current. TE reserves the right to make any adjustments to the information contained herein at any time without notice. TE EXPRESSLY DISCLAIMS ALL IMPLIED WARRANTIES REGARDING THE INFORMATION CONTAINED HEREIN, INCLUDING, BUT NOT LIMITED TO, ANY IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. In no event will TE be liable for any direct, indirect, incidental, special or consequential damages arising from or related to recipient's use of the information. It is the sole responsibility of recipient of this information to verify the results of this information using their engineering and product environment. Recipient assumes any and all risks associated with the use of the information. Antenna performance may vary. TE is a component manufacturer, and customer and/or end-user is responsible for all end-use compliance and regulatory requirements.

©2026 TE Connectivity. All Rights Reserved.

03/26 **Original**