National Semiconductor

March 2000

LM556
Dual Timer

General Description

The LM556 Dual timing circuit is a highly stable controller capable of producing accurate time delays or oscillation. The 556 is a dual 555. Timing is provided by an external resistor and capacitor for each timing function. The two timers operate independently of each other sharing only V_{CC} and ground. The circuits may be triggered and reset on falling waveforms. The output structures may sink or source 200mA.

Features


- Direct replacement for SE556/NE556
- Timing from microseconds through hours
- Operates in both astable and monostable modes
- Replaces two 555 timers
- Adjustable duty cycle
- Output can source or sink 200mA
- Output and supply TTL compatible
- Temperature stability better than 0.005% per ˚C
- Normally on and normally off output

Applications

- Precision timing
- Pulse generation
- Sequential timing
- Time delay generation
- Pulse width modulation
- Pulse position modulation
- Linear ramp generator

Connection Diagram

Dual-In-Line, Small Outline Packages

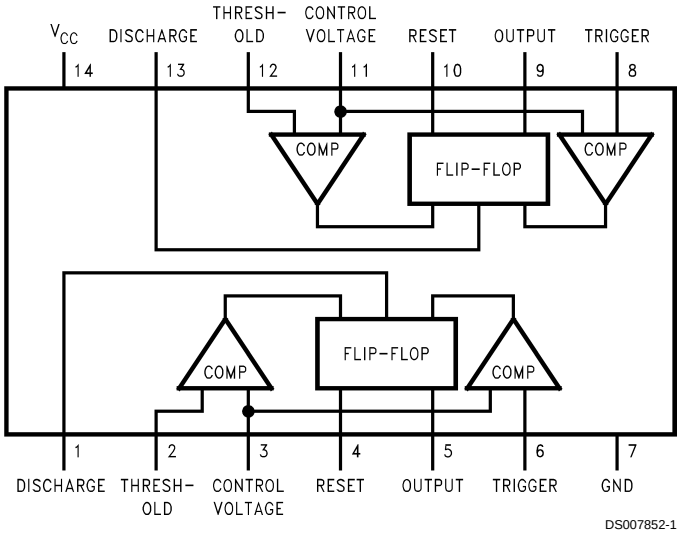


Top View

Ordering Information

Package	Part Number	Package Marking	Media Transport	NSC Drawing
14-Pin SOIC	LM556CM	LM556CM	Rails	M14A
	LM556CMX	LM556CM	2.5k Units Tape and Reel	
14-Pin MDIP	LM556CN	LM556CN	Rails	N14a

© 2000 National Semiconductor Corporation

Schematic Diagram

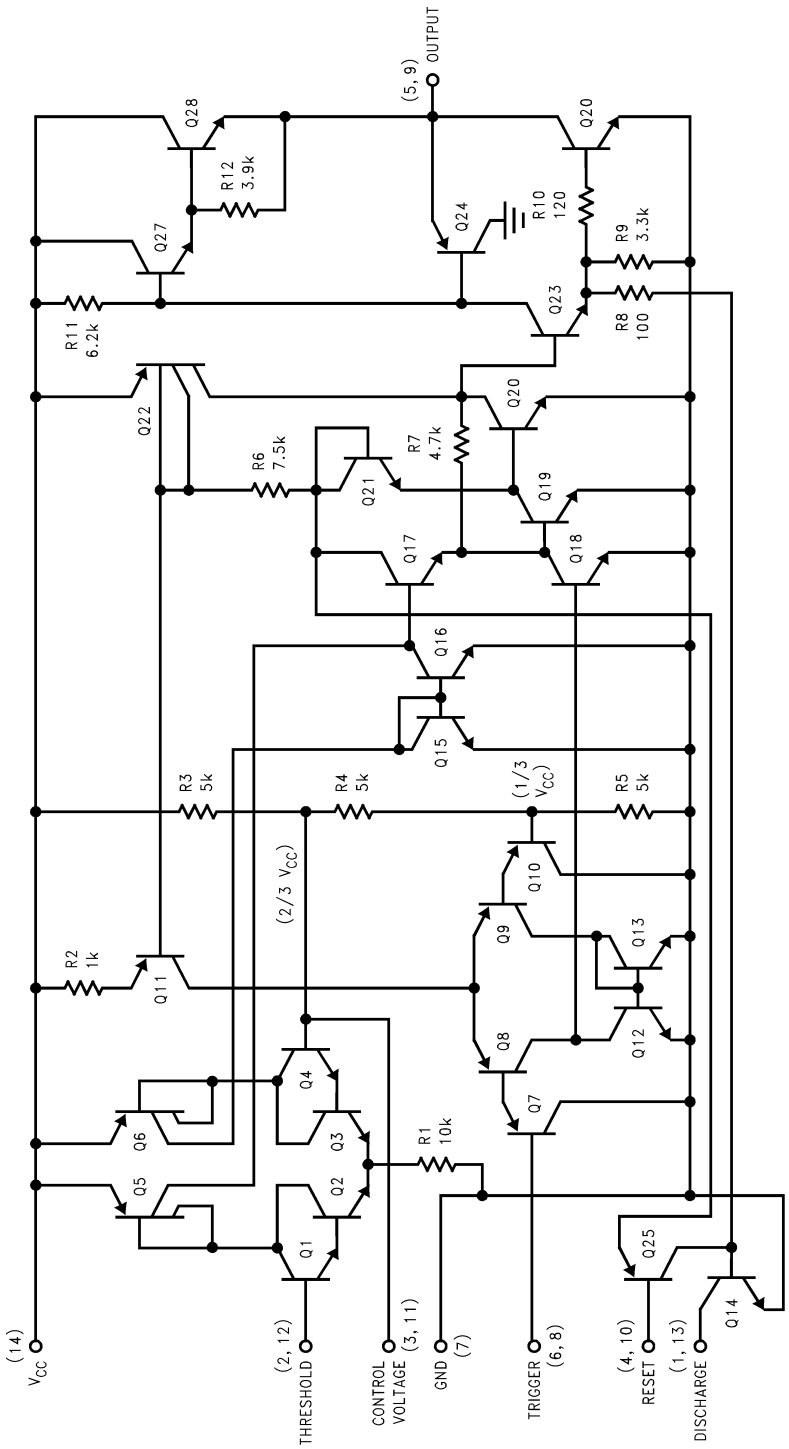

Absolute Maximum Ratings (Note 1)

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/ Distributors for availability and specifications.

Supply Voltage	+18V
Power Dissipation (Note 2)	
LM556CM	410 mW
LM556CN	1620 mW
Operating Temperature Ranges	
LM556C	0˚C to +70˚C
Storage Temperature Range	−65˚C to +150˚C
Soldering Information	
Dual-In-Line Package	
Soldering (10 Seconds)	260˚C
Small Outline Packages	
Vapor Phase (60 Seconds)	215˚C
Infrared (15 Seconds)	220˚C

See AN-450 “Surface Mounting Methods and Their Effect on Product Reliability” for other methods of soldering surface mount devices.

Electrical Characteristics

(T_A = 25˚C, V_{CC} = +5V to +15V, unless otherwise specified)


Parameter	Conditions	Limits			Units
		LM556C			
		Min	Typ	Max	
Supply Voltage		4.5		16	V
Supply Current	V_{CC} = 5V, R_L = ∞		3	6	
(Each Timer Section)	V_{CC} = 15V, R_L = ∞ (Low State) (Note 3)		10	14	mA
Timing Error, Monostable					
Initial Accuracy			0.75		%
Drift with Temperature	R_A = 1k to 100kΩ, C = 0.1µF, (Note 4)		50		ppm/˚C
Accuracy over Temperature			1.5		%
Drift with Supply			0.1		%/V
Timing Error, Astable					
Initial Accuracy			2.25		%
Drift with Temperature	R_A, R_B = 1k to 100kΩ, C = 0.1µF, (Note 4)		150		ppm/˚C
Accuracy over Temperature			3.0		%
Drift with Supply			0.30		%/V
Trigger Voltage	V_{CC} = 15V	4.5	5	5.5	V
	V_{CC} = 5V	1.25	1.67	2.0	V
Trigger Current			0.2	1.0	µA
Reset Voltage		0.4	0.5	1	V
Reset Current			0.1	0.6	mA
Threshold Current	V_{TH} = V-Control (Note 6)		0.03	0.1	µA
	V_{TH} = 11.2V			250	nA
Control Voltage Level and Threshold Voltage	V_{CC} = 15V	9	10	11	V
	V_{CC} = 5V	2.6	3.33	4	
Pin 1, 13 Leakage Output High			1	100	nA
Pin 1, 13 Sat	(Note 7)				
Output Low	V_{CC} = 15V, I = 15mA		180	300	mV
Output Low	V_{CC} = 4.5V, I = 4.5mA		80	200	mV
Output Voltage Drop (Low)	V_{CC} = 15V				
	I_{SINK} = 10mA		0.1	0.25	V
	I_{SINK} = 50mA		0.4	0.75	V
	I_{SINK} = 100mA		2	2.75	V
	I_{SINK} = 200mA		2.5		V
	V_{CC} = 5V				
	I_{SINK} = 8mA				V
	I_{SINK} = 5mA		0.25	0.35	V

Electrical Characteristics (Continued)

(T_A = 25˚C, V_{CC}


Typical Performance Characteristics (Continued)

High Output Voltage vs. Output Source Current

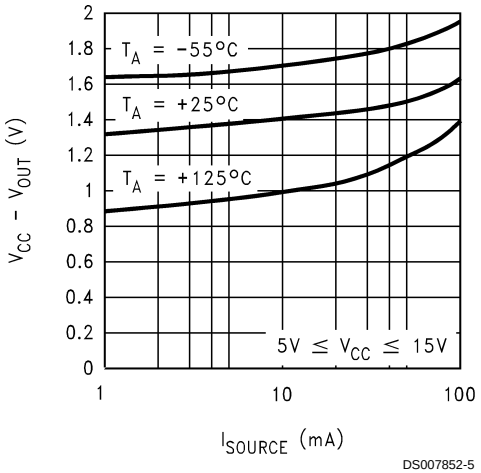


DS007852-5

Low Output Voltage vs. Output Sink Current

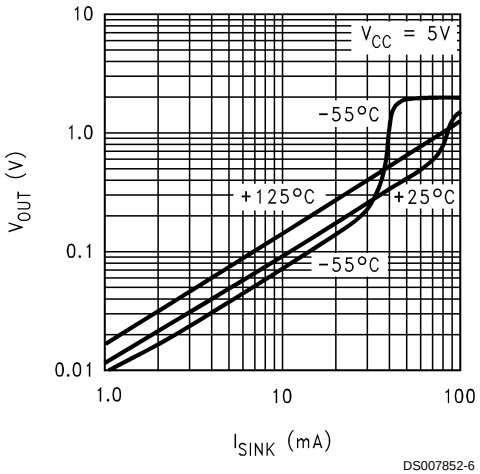


DS007852-6

Low Output Voltage vs. Output Sink Current

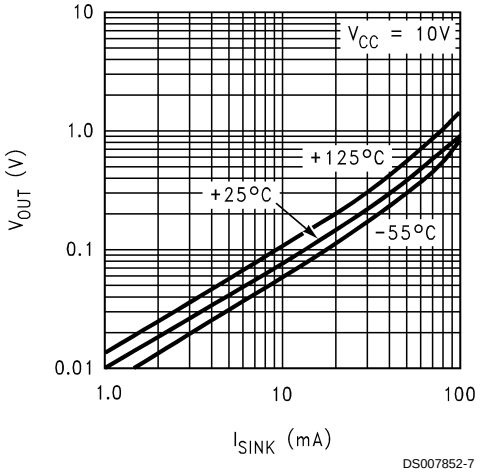


DS007852-7

Low Output Voltage vs. Output Sink Current

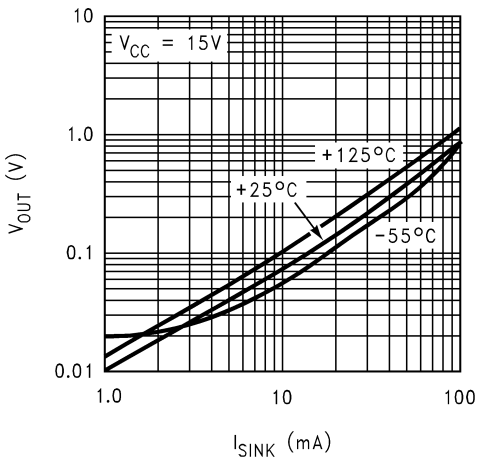


DS007852-8

Output Propagation Delay vs. Voltage Level of Trigger Pulse

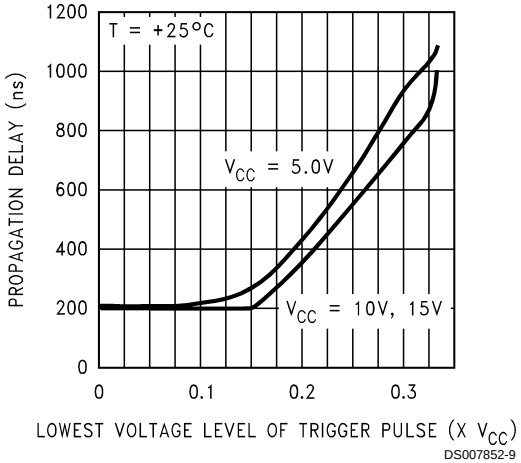

DS007852-9


Output Propagation Delay vs. Voltage Level of Trigger Pulse

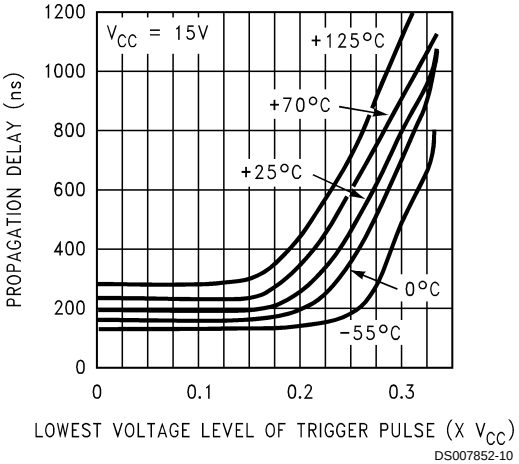

DS007852-10


Typical Performance Characteristics (Continued)

Discharge Transistor (Pin 1, 13) Voltage vs. Sink Current

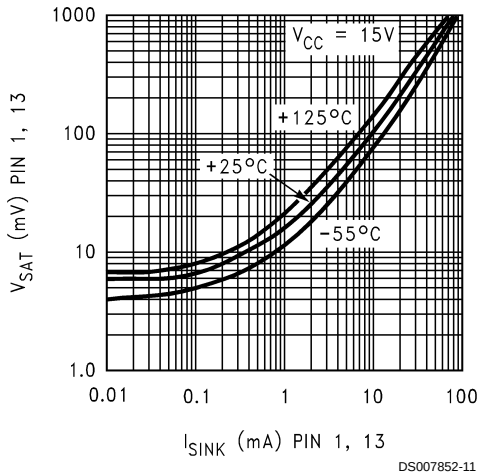


DS007852-11

Discharge Transistor (Pin 1, 13) Voltage vs. Sink Current

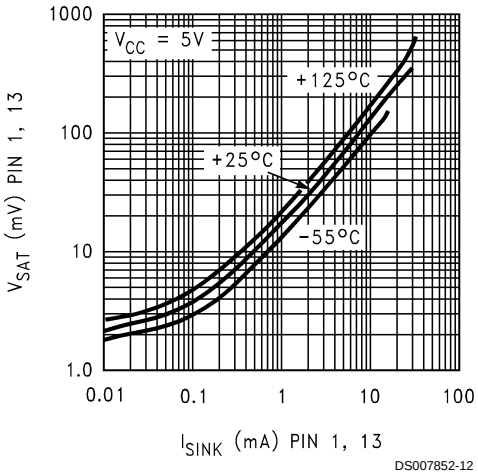


DS007852-12

Physical Dimensions inches (millimeters) unless otherwise noted

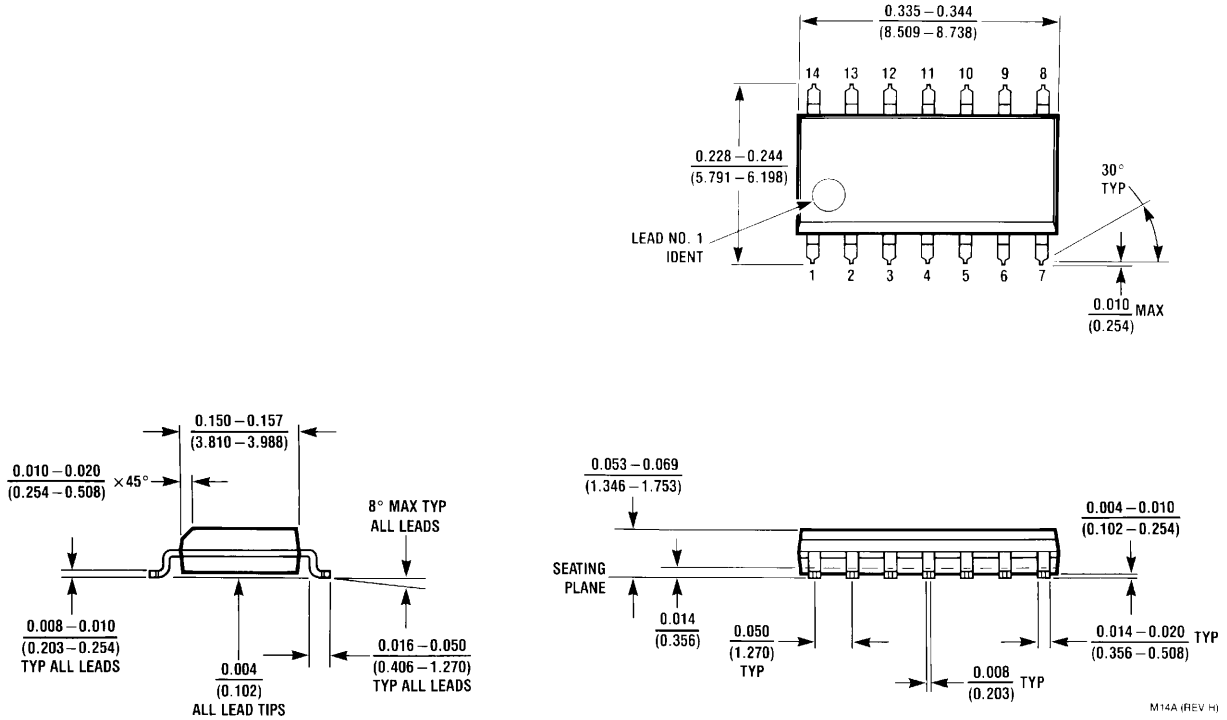

Small Outline Package (M)
NS Package Number M14A

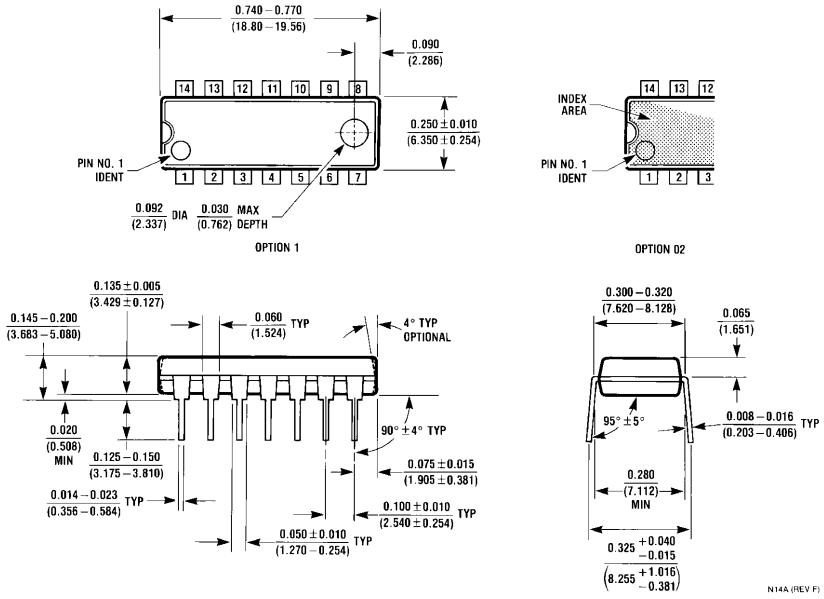

14-Lead (0.118” Wide) Molded Mini Small Outline Package
NS Package Number N14A

Notes

LIFE SUPPORT POLICY

NATIONAL'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT AND GENERAL COUNSEL OF NATIONAL SEMICONDUCTOR CORPORATION. As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury to the user.
2. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

National Semiconductor Corporation
Americas
Tel: 1-800-272-9959
Fax: 1-800-737-7018
Email: support@nsc.com
www.national.com

National Semiconductor Europe
Fax: +49 (0) 180-530 85 86
Email: europe.support@nsc.com
Deutsch Tel: +49 (0) 69 9508 6208
English Tel: +44 (0) 870 24 0 2171
Français Tel: +33 (0) 1 41 91 8790

National Semiconductor Asia Pacific Customer Response Group
Tel: 65-2544466
Fax: 65-2504466
Email: ap.support@nsc.com

National Semiconductor Japan Ltd.
Tel: 81-3-5639-7560
Fax: 81-3-5639-7507

National does not assume any responsibility for use of any circuitry described, no circuit patent licenses are implied and National reserves the right at any time without notice to change said circuitry and specifications.