MOSFET – Small Signal, Complementary, SC-88

20 V / -8.0 V, +0.63 A / -0.775 A

NTJD4105C

$V_{(BR)DSS}$	$R_{DS(on)}$ TYP	I_D Max
N-Ch 20 V	0.29 Ω @ 4.5 V	0.63 A
	0.36 Ω @ 2.5 V	
P-Ch −8.0 V	0.22 Ω @ −4.5 V	−0.775 A
	0.32 Ω @ −2.5 V	
	0.51 Ω @ −1.8 V	

Features

- Complementary N and P Channel Device
- Leading −8.0 V Trench for Low $R_{DS(on)}$ Performance
- ESD Protected Gate – ESD Rating: Class 1
- SC-88 Package for Small Footprint (2 x 2 mm)
- Pb-Free Packages are Available

Applications


- DC-DC Conversion
- Load/Power Switching
- Single or Dual Cell Li-Ion Battery Supplied Devices
- Cell Phones, MP3s, Digital Cameras, PDAs



1

SC-88/SOT-363
CASE 419B
STYLE 26

SOT-363
SC-88 (6-LEADS)

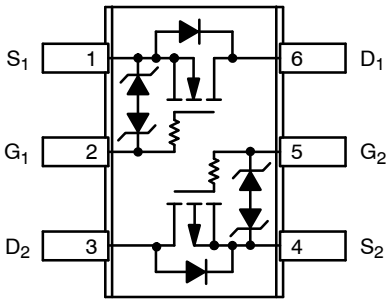

Top View

MAXIMUM RATINGS (T_J = 25 °C unless otherwise noted)

Symbol	Parameter			Value	Unit
V_{DSS}	Drain-to-Source Voltage		N-Ch	20	V
			P-Ch	−8.0	
V_{GS}	Gate-to-Source Voltage		N-Ch	±12	V
			P-Ch	±8.0	
I_D	Continuous Drain Current – Steady State (Based on $R_{\theta JA}$)	N-Ch	T_A = 25 °C	0.63	A
			T_A = 85 °C	0.46	
		P-Ch	T_A = 25 °C	−0.775	
			T_A = 85 °C	−0.558	
	Continuous Drain Current – Steady State (Based on $R_{\theta JL}$)	N-Ch	T_A = 25 °C	0.91	
			T_A = 85 °C	0.65	
		P-Ch	T_A = 25 °C	−1.1	
			T_A = 85 °C	−0.8	
I_{DM}	Pulsed Drain Current		tp ≤ 10 μs	±1.2	A
P_D	Power Dissipation – Steady State (Based on $R_{\theta JA}$)		T_A = 25 °C	0.27	W
			T_A = 85 °C	0.14	
	Power Dissipation – Steady State (Based on $R_{\theta JL}$)		T_A = 25 °C	0.55	
			T_A = 85 °C	0.29	
T_J, T_{STG}	Operating Junction and Storage Temperature			−55 to 150	°C
I_S	Source Current (Body Diode)		N-Ch	0.63	A
			P-Ch	−0.775	
T_L	Lead Temperature for Soldering Purposes (1/8" from case for 10 s)			260	°C


Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.

THERMAL RESISTANCE RATINGS (Note 1)

Symbol	Parameter		Value	Unit
$R_{\theta JA}$	Junction-to-Ambient – Steady State	Typ	400	°C/W
		Max	460	
$R_{\theta JL}$	Junction-to-Lead (Drain) – Steady State	Typ	194	
		Max	226	

1. Surface mounted on FR4 board using 1 oz Cu area = 0.9523 in sq.

MARKING DIAGRAM & PIN ASSIGNMENT



TC = Device Code
M = Date Code
▪ = Pb-Free Package

(Note: Microdot may be in either location)

ORDERING INFORMATION

See detailed ordering and shipping information in the package dimensions section on page 7 of this data sheet.

NOTE: Some of the devices on this data sheet have been **DISCONTINUED**. Please refer to the table on page 7.

© Semiconductor Components Industries, LLC, 2006

ELECTRICAL CHARACTERISTICS (T_J = 25 °C unless otherwise noted)

Symbol	Parameter	N/P	Test Condition		Min	Typ	Max	Units
OFF CHARACTERISTICS								
$V_{(BR)DSS}$	Drain-to-Source Breakdown Voltage	N	V_{GS} = 0 V	I_D = 250 μA	20	27		V
		P		I_D = −250 μA	−8.0	−10.5		
$V_{(BR)DSS}$ / T_J	Drain-to-Source Breakdown Voltage Temperature Coefficient	N				22		mV/ °C
		P				−6.0		
I_{DSS}	Zero Gate Voltage Drain Current	N	V_{GS} = 0 V, V_{DS} = 16 V	T_J = 25 °C			1.0	μA
		P	V_{GS} = 0 V, V_{DS} = −6.4 V				1.0	
I_{GSS}	Gate-to-Source Leakage Current	N	V_{DS} = 0 V	V_{GS} = ±12 V			10	μA
		P		V_{GS} = ±8.0 V			10	
ON CHARACTERISTICS (Note 2)								
$V_{GS(TH)}$	Gate Threshold Voltage	N	V_{GS} = V_{DS}	I_D = 250 μA	0.6	0.92	1.5	V
		P		I_D = −250 μA	−0.45	−0.83	−1.0	
$V_{GS(TH)}$ / T_J	Gate Threshold Temperature Coefficient	N				−2.1		−mV/ °C
		P				2.2		
$R_{DS(on)}$	Drain-to-Source On Resistance	N	V_{GS} = 4.5 V I_D = 0.63 A			0.29	0.375	Ω
		P	V_{GS} = −4.5 V, I_D = −0.57 A			0.22	0.30	
		N	V_{GS} = 2.5 V, I_D = 0.40 A			0.36	0.445	
		P	V_{GS} = −2.5 V, I_D = −0.48 A			0.32	0.46	
		P	V_{GS} = −1.8 V, I_D = −0.20 A			0.51	0.90	
g_{FS}	Forward Transconductance	N	V_{DS} = 4.0 V I_D = 0.63 A			2.0		S
		P	V_{DS} = −4.0 V, I_D = −0.57 A			2.0		
CHARGES AND CAPACITANCES								
C_{ISS}	Input Capacitance	N	f = 1 MHz, V_{GS} = 0 V	V_{DS} = 20 V		33	46	pF
		P		V_{DS} = −8.0V		160	225	
C_{OSS}	Output Capacitance	N		V_{DS} = 20 V		13	22	
		P		V_{DS} = −8.0 V		38	55	
C_{RSS}	Reverse Transfer Capacitance	N		V_{DS} = 20 V		2.8	5.0	
		P		V_{DS} = −8.0 V		28	40	
$Q_{G(TOT)}$	Total Gate Charge	N	V_{GS} = 4.5 V, V_{DS} = 10 V, I_D = 0.7 A			1.3	3.0	nC
		P	V_{GS} = −4.5 V, V_{DS} = −5.0 V, I_D = −0.6 A			2.2	4.0	
$Q_{G(TH)}$	Threshold Gate Charge	N	V_{GS} = 4.5 V, V_{DS} = 10 V, I_D = 0.7 A			0.1		
		P	V_{GS} = −4.5 V, V_{DS} = −5.0 V, I_D = −0.6 A			0.1		
Q_{GS}	Gate-to-Source Charge	N	V_{GS} = 4.5 V, V_{DS} = 10 V, I_D = 0.7 A			0.2		
		P	V_{GS} = −4.5 V, V_{DS} = −5.0 V, I_D = −0.6 A			0.5		
Q_{GD}	Gate-to-Drain Charge	N	V_{GS} = 4.5 V, V_{DS} = 10 V, I_D = 0.7 A			0.4		
		P	V_{GS} = −4.5 V, V_{DS} = −5.0 V, I_D = −0.6 A			0.5		
SWITCHING CHARACTERISTICS (Note 3)								
$t_{d(ON)}$	Turn-On Delay Time	N	V_{GS} = 4.5 V, V_{DD} = 10 V, I_D = 0.5 A, R_G = 20 Ω			0.083		μs
t_r	Rise Time					0.227		
$t_{d(OFF)}$	Turn-Off Delay Time					0.786		
t_f	Fall Time					0.506		
$t_{d(ON)}$	Turn-On Delay Time	P	V_{GS} = −4.5 V, V_{DD} = −4.0 V, I_D = −0.5 A, R_G = 8.0 Ω			0.013		
t_r	Rise Time					0.023		
$t_{d(OFF)}$	Turn-Off Delay Time					0.050		
t_f	Fall Time					0.036		
DRAIN-SOURCE DIODE CHARACTERISTICS								
V_{SD}	Forward Diode Voltage	N	V_{GS} = 0 V, T_J = 25 °C	I_S = 0.23 A		0.76	1.1	V
		P		I_S = −0.23 A		0.76	1.1	
		N	V_{GS} = 0 V, T_J = 125 °C	I_S = 0.23 A		0.63		
		P		I_S = −0.23 A		0.63		
t_{RR}	Reverse Recovery Time	N	V_{GS} = 0 V, d_{IS}/d_t = 90 A/μs	I_S = 0.23 A		0.410		μs
		P		I_S = −0.23 A		0.078		

2. Pulse Test: pulse width ≤ 300 μs, duty cycle ≤ 2%.
3. Switching characteristics are independent of operating junction temperatures.

Share Feedback
Your Opinion Matters

TYPICAL N-CHANNEL PERFORMANCE CURVES (T_J = 25 °C unless otherwise noted)

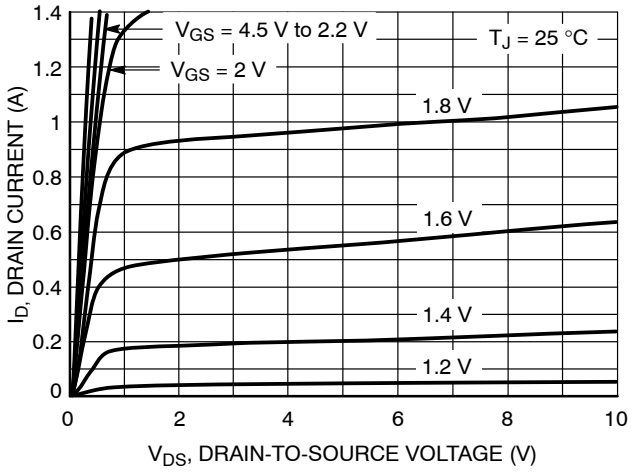


Figure 1. On-Region Characteristics

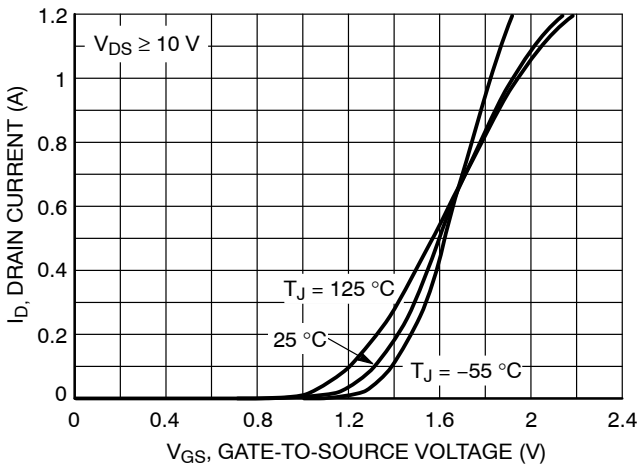


Figure 2. Transfer Characteristics

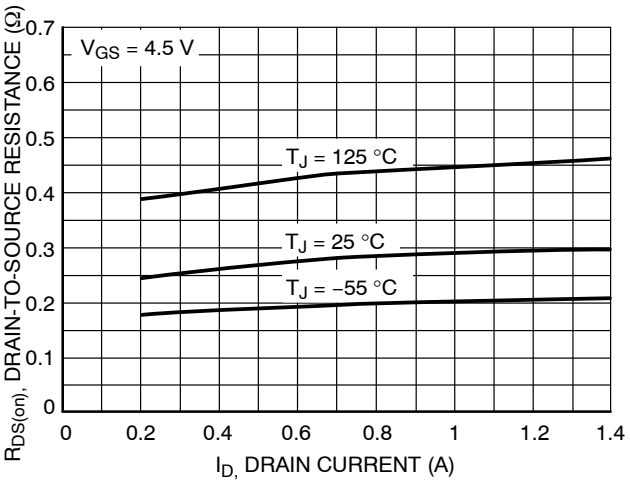


Figure 3. On-Resistance vs. Drain Current and Temperature

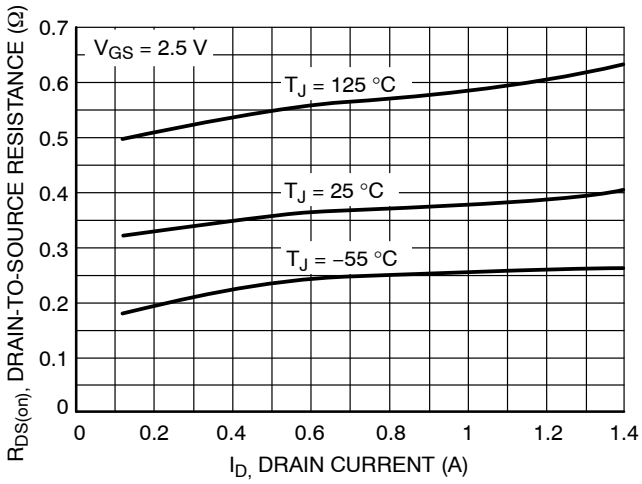


Figure 4. On-Resistance vs. Drain Current and Temperature

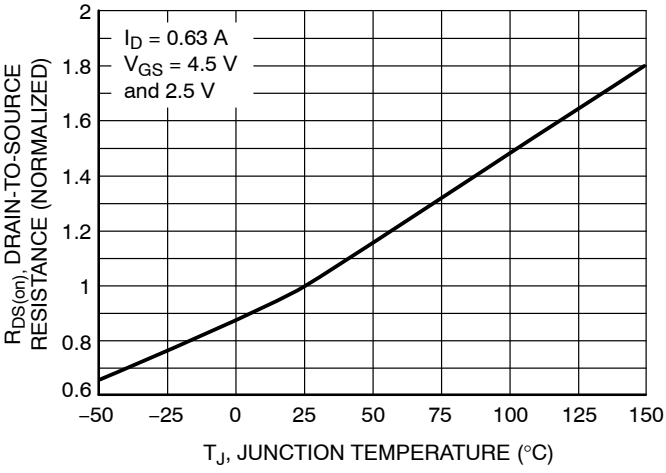


Figure 5. On-Resistance Variation with Temperature

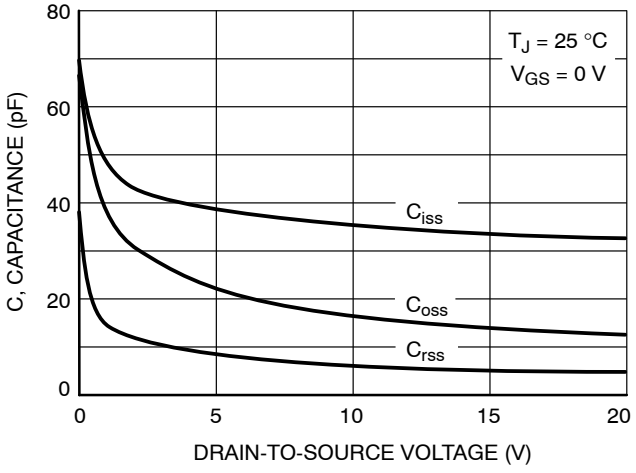


Figure 6. Capacitance Variation

Share Feedback
Your Opinion Matters

TYPICAL N-CHANNEL PERFORMANCE CURVES (T_J = 25 °C unless otherwise noted) (continued)

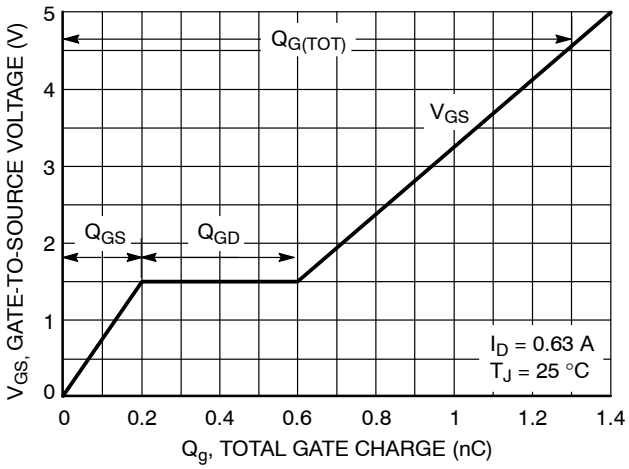


Figure 7. Gate-to-Source and Drain-to-Source Voltage vs. Total Charge

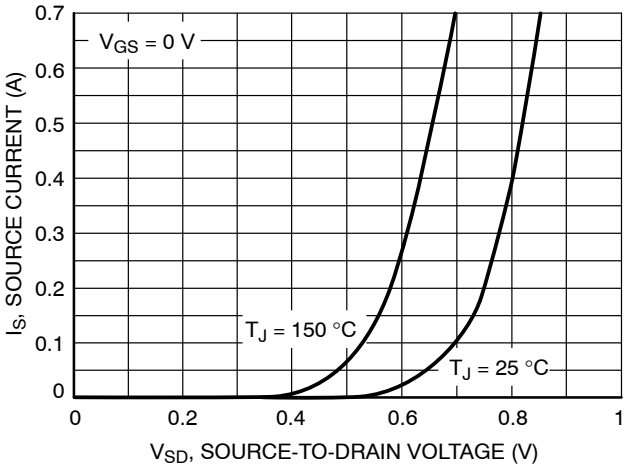


Figure 8. Diode Forward Voltage vs. Current

Share Feedback
Your Opinion Matters

TYPICAL P-CHANNEL PERFORMANCE CURVES (T_J = 25 °C unless otherwise noted) (continued)

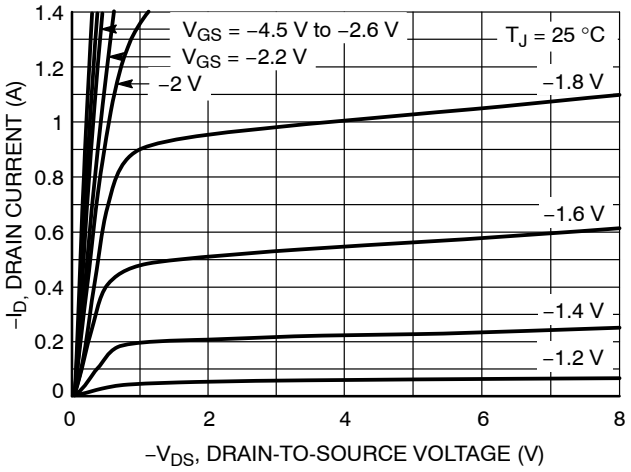


Figure 9. On-Region Characteristics

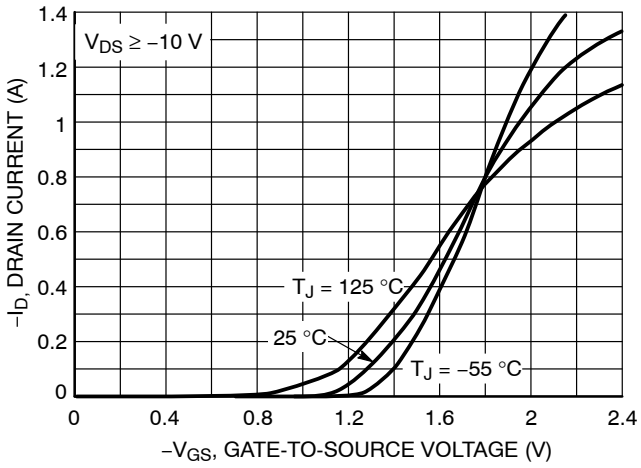


Figure 10. Transfer Characteristics

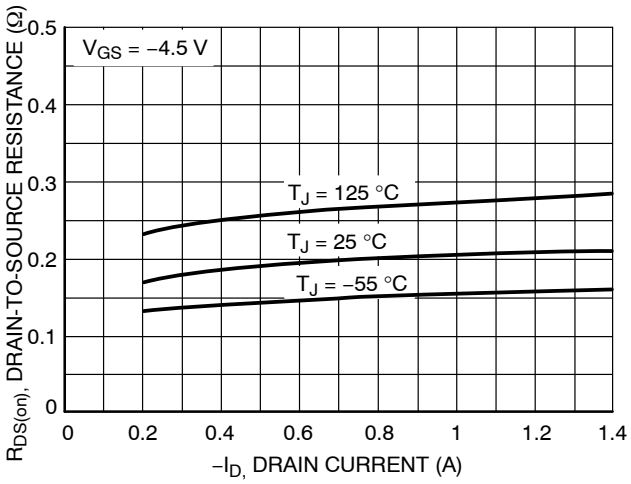


Figure 11. On-Resistance vs. Drain Current and Temperature

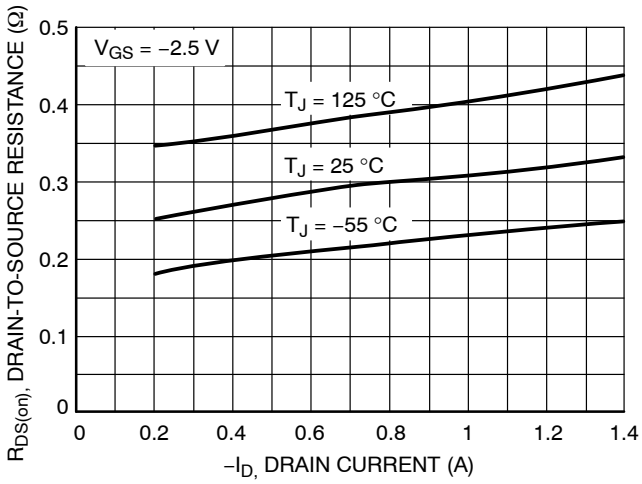


Figure 12. On-Resistance vs. Drain Current and Temperature

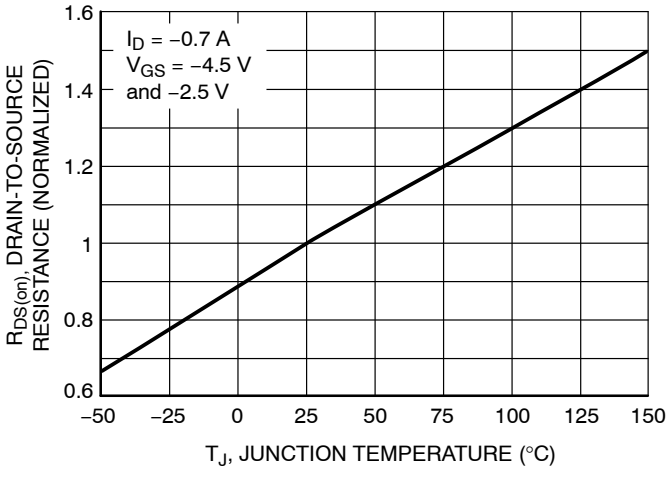


Figure 13. On-Resistance Variation with Temperature

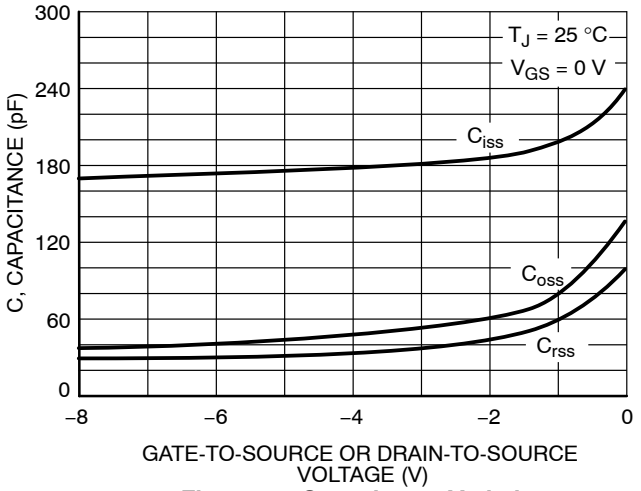


Figure 14. Capacitance Variation

Share Feedback
Your Opinion Matters

TYPICAL P-CHANNEL PERFORMANCE CURVES (T_J = 25 °C unless otherwise noted) (continued)

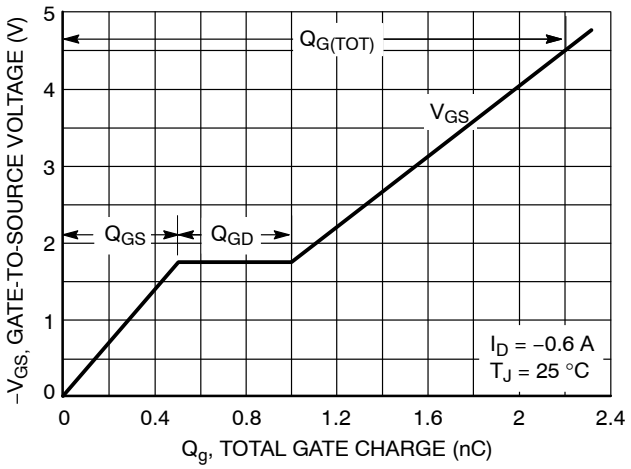


Figure 15. Gate-to-Source and Drain-to-Source Voltage vs. Total Charge

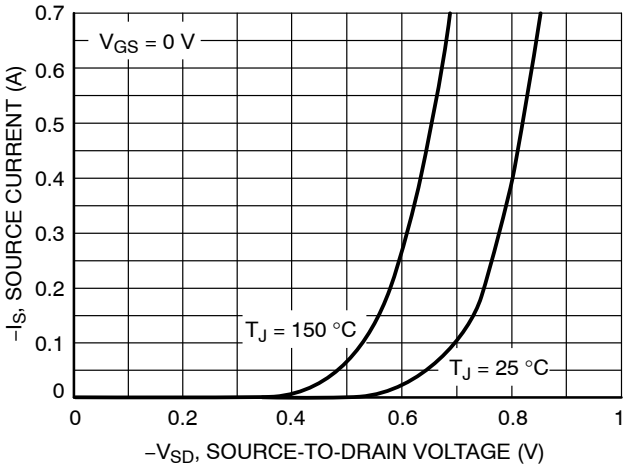


Figure 16. Diode Forward Voltage vs. Current

Share Feedback
Your Opinion Matters

ORDERING INFORMATION

Device	Package	Shipping†
NTJD4105CT1G	SOT-363 (Pb-Free)	3000 / Tape & Reel
NTJD4105CT2G	SOT-363 (Pb-Free)	3000 / Tape & Reel

DISCONTINUED (Note 4)

NTJD4105CT1	SOT-363	3000 / Tape & Reel
NTJD4105CT2	SOT-363	3000 / Tape & Reel
NTJD4105CT4	SOT-363	10,000 / Tape & Reel
NTJD4105CT4G	SOT-363 (Pb-Free)	10,000 / Tape & Reel

† For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, BRD8011/D.

4. **DISCONTINUED:** These devices are not recommended for new design. Please contact your **onsemi** representative for information. The most current information on these devices may be available on www.onsemi.com.

Share Feedback
Your Opinion Matters

REVISION HISTORY

Revision	Description of Changes	Date
4	Case outline style changed from 28 to 26 and minor formatting updates across the document.	11/9/2026


This document has undergone updates prior to the inclusion of this revision history table. The changes tracked here only reflect updates made on the noted approval dates.

Share Feedback
Your Opinion Matters




SC−88 2.00x1.25x0.90, 0.65P
CASE 419B−02
ISSUE Z


DATE 18 APR 2024

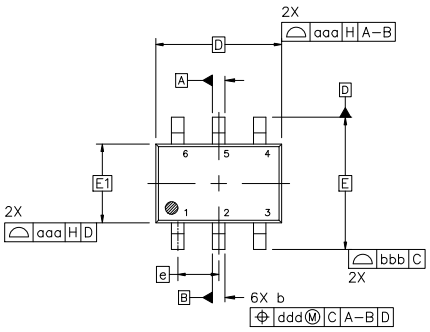


TOP VIEW



SIDE VIEW



END VIEW




DETAIL A
SCALE 2:1

NOTES:

1. DIMENSIONING AND TOLERANCING CONFORM TO ASME Y14.5−2018.
2. ALL DIMENSION ARE IN MILLIMETERS.
3. DIMENSIONS D AND E1 DO NOT INCLUDE MOLD FLASH, PROTRUSIONS, OR GATE BURRS. MOLD FLASH, PROTRUSIONS, OR GATE BURRS SHALL NOT EXCEED 0.20 PER END.
4. DIMENSIONS D AND E1 AT THE OUTERMOST EXTREMES OF THE PLASTIC BODY AND DATUM H.
5. DATUMS A AND B ARE DETERMINED AT DATUM H.
6. DIMENSIONS b AND c APPLY TO THE FLAT SECTION OF THE LEAD BETWEEN 0.08 AND 0.15 FROM THE TIP.
7. DIMENSION b DOES NOT INCLUDE DAMBAR PROTRUSION. ALLOWABLE DAMBAR PROTRUSION SHALL BE 0.08 TOTAL IN EXCESS OF DIMENSION b AT MAXIMUM MATERIAL CONDITION. THE DAMBAR CANNOT BE LOCATED ON THE LOWER RADIUS OF THE FOOT.


	MILLIMETERS		
DIM	MIN.	NOM.	MAX.
A	−−−	−−−	1.10
A1	0.00	−−−	0.10
A2	0.70	0.90	1.00
b	0.15	0.20	0.25
c	0.08	0.15	0.22
D	2.00 BSC		
E	2.10 BSC		
E1	1.25 BSC		
e	0.65 BSC		
L	0.26	0.36	0.46
L2	0.15 BSC		
aaa	0.15		
bbb	0.30		
ccc	0.10		
ddd	0.10		



RECOMMENDED MOUNTING FOOTPRINT*

* FOR ADDITIONAL INFORMATION ON OUR Pb−FREE STRATEGY AND SOLDERING DETAILS, PLEASE DOWNLOAD THE ONSEMI SOLDERING AND MOUNTING TECHNIQUES REFERENCE MANUAL, SOLDERRM/D.

GENERIC MARKING DIAGRAM*



XXX = Specific Device Code
M = Date Code*
▪ = Pb−Free Package

(Note: Microdot may be in either location)

*Date Code orientation and/or position may vary depending upon manufacturing location.

*This information is generic. Please refer to device data sheet for actual part marking. Pb−Free indicator, “G” or microdot “▪”, may or may not be present. Some products may not follow the Generic Marking.

STYLES ON PAGE 2

DOCUMENT NUMBER:	**98ASB42985B**	Electronic versions are uncontrolled except when accessed directly from the Document Repository. Printed versions are uncontrolled except when stamped “CONTROLLED COPY” in red.	
DESCRIPTION:	**SC−88 2.00x1.25x0.90, 0.65P**		**PAGE 1 OF 2**

onsemi and onsemi are trademarks of Semiconductor Components Industries, LLC dba **onsemi** or its subsidiaries in the United States and/or other countries. **onsemi** reserves the right to make changes without further notice to any products herein. **onsemi** makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does **onsemi** assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. **onsemi** does not convey any license under its patent rights nor the rights of others.

SC−88 2.00x1.25x0.90, 0.65P
CASE 419B−02
ISSUE Z

DATE 18 APR 2024

STYLE 1:
PIN 1. EMITTER 2
2. BASE 2
3. COLLECTOR 1
4. EMITTER 1
5. BASE 1
6. COLLECTOR 2

STYLE 2:
CANCELLED

STYLE 3:
CANCELLED

STYLE 4:
PIN 1. CATHODE
2. CATHODE
3. COLLECTOR
4. EMITTER
5. BASE
6. ANODE

STYLE 5:
PIN 1. ANODE
2. ANODE
3. COLLECTOR
4. EMITTER
5. BASE
6. CATHODE

STYLE 6:
PIN 1. ANODE 2
2. N/C
3. CATHODE 1
4. ANODE 1
5. N/C
6. CATHODE 2

STYLE 7:
PIN 1. SOURCE 2
2. DRAIN 2
3. GATE 1
4. SOURCE 1
5. DRAIN 1
6. GATE 2

STYLE 8:
CANCELLED

STYLE 9:
PIN 1. EMITTER 2
2. EMITTER 1
3. COLLECTOR 1
4. BASE 1
5. BASE 2
6. COLLECTOR 2

STYLE 10:
PIN 1. SOURCE 2
2. SOURCE 1
3. GATE 1
4. DRAIN 1
5. DRAIN 2
6. GATE 2

STYLE 11:
PIN 1. CATHODE 2
2. CATHODE 2
3. ANODE 1
4. CATHODE 1
5. CATHODE 1
6. ANODE 2

STYLE 12:
PIN 1. ANODE 2
2. ANODE 2
3. CATHODE 1
4. ANODE 1
5. ANODE 1
6. CATHODE 2

STYLE 13:
PIN 1. ANODE
2. N/C
3. COLLECTOR
4. EMITTER
5. BASE
6. CATHODE

STYLE 14:
PIN 1. VREF
2. GND
3. GND
4. IOUT
5. VEN
6. VCC

STYLE 15:
PIN 1. ANODE 1
2. ANODE 2
3. ANODE 3
4. CATHODE 3
5. CATHODE 2
6. CATHODE 1

STYLE 16:
PIN 1. BASE 1
2. EMITTER 2
3. COLLECTOR 2
4. BASE 2
5. EMITTER 1
6. COLLECTOR 1

STYLE 17:
PIN 1. BASE 1
2. EMITTER 1
3. COLLECTOR 2
4. BASE 2
5. EMITTER 2
6. COLLECTOR 1

STYLE 18:
PIN 1. VIN1
2. VCC
3. VOUT2
4. VIN2
5. GND
6. VOUT1

STYLE 19:
PIN 1. I OUT
2. GND
3. GND
4. V CC
5. V EN
6. V REF

STYLE 20:
PIN 1. COLLECTOR
2. COLLECTOR
3. BASE
4. EMITTER
5. COLLECTOR
6. COLLECTOR

STYLE 21:
PIN 1. ANODE 1
2. N/C
3. ANODE 2
4. CATHODE 2
5. N/C
6. CATHODE 1

STYLE 22:
PIN 1. D1 (i)
2. GND
3. D2 (i)
4. D2 (c)
5. VBUS
6. D1 (c)

STYLE 23:
PIN 1. Vn
2. CH1
3. Vp
4. N/C
5. CH2
6. N/C

STYLE 24:
PIN 1. CATHODE
2. ANODE
3. CATHODE
4. CATHODE
5. CATHODE
6. CATHODE

STYLE 25:
PIN 1. BASE 1
2. CATHODE
3. COLLECTOR 2
4. BASE 2
5. EMITTER
6. COLLECTOR 1

STYLE 26:
PIN 1. SOURCE 1
2. GATE 1
3. DRAIN 2
4. SOURCE 2
5. GATE 2
6. DRAIN 1

STYLE 27:
PIN 1. BASE 2
2. BASE 1
3. COLLECTOR 1
4. EMITTER 1
5. EMITTER 2
6. COLLECTOR 2

STYLE 28:
PIN 1. DRAIN
2. DRAIN
3. GATE
4. SOURCE
5. DRAIN
6. DRAIN

STYLE 29:
PIN 1. ANODE
2. ANODE
3. COLLECTOR
4. EMITTER
5. BASE/ANODE
6. CATHODE

STYLE 30:
PIN 1. SOURCE 1
2. DRAIN 2
3. DRAIN 2
4. SOURCE 2
5. GATE 1
6. DRAIN 1

Note: Please refer to datasheet for style callout. If style type is not called out in the datasheet refer to the device datasheet pinout or pin assignment.

DOCUMENT NUMBER:	**98ASB42985B**	Electronic versions are uncontrolled except when accessed directly from the Document Repository. Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red.	
DESCRIPTION:	**SC−88 2.00x1.25x0.90, 0.65P**		**PAGE 2 OF 2**

onsemi and ONSEMI are trademarks of Semiconductor Components Industries, LLC dba **onsemi** or its subsidiaries in the United States and/or other countries. **onsemi** reserves the right to make changes without further notice to any products herein. **onsemi** makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does **onsemi** assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. **onsemi** does not convey any license under its patent rights nor the rights of others.

© Semiconductor Components Industries, LLC, 2019

onsemi, , and other names, marks, and brands are registered and/or common law trademarks of Semiconductor Components Industries, LLC dba "**onsemi**" or its affiliates and/or subsidiaries in the United States and/or other countries. **onsemi** owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of **onsemi**'s product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent−Marking.pdf. **onsemi** reserves the right to make changes at any time to any products or information herein, without notice. The information herein is provided "as−is" and **onsemi** makes no warranty, representation or guarantee regarding the accuracy of the information, product features, availability, functionality, or suitability of its products for any particular purpose, nor does **onsemi** assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using **onsemi** products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by **onsemi**. "Typical" parameters which may be provided in **onsemi** data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. **onsemi** does not convey any license under any of its intellectual property rights nor the rights of others. **onsemi** products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use **onsemi** products for any such unintended or unauthorized application, Buyer shall indemnify and hold **onsemi** and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that **onsemi** was negligent regarding the design or manufacture of the part. **onsemi** is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

ADDITIONAL INFORMATION

TECHNICAL PUBLICATIONS:
Technical Library: www.onsemi.com/design/resources/technical−documentation
onsemi Website: www.onsemi.com

ONLINE SUPPORT: www.onsemi.com/support
For additional information, please contact your local Sales Representative at www.onsemi.com/support/sales