UMW TL084

General J-FET quad operational amplifier

1.Description


UMW TL084 is a high-speed operational amplifier with four J-FET inputs, which consists of high voltage J-FET and bipolar transistor.

It has high conversion rate, low input bias current and offset current, and low offset voltage temperature coefficient.

2.Features

- Wide common-mode and differential-mode input voltage range
- Low input bias current and offset current
- Output short-circuit current protection
- High input impedance
- Internal frequency compensation
- Self-latching station
- High conversion rate: 16V/us

3.Pinning Information

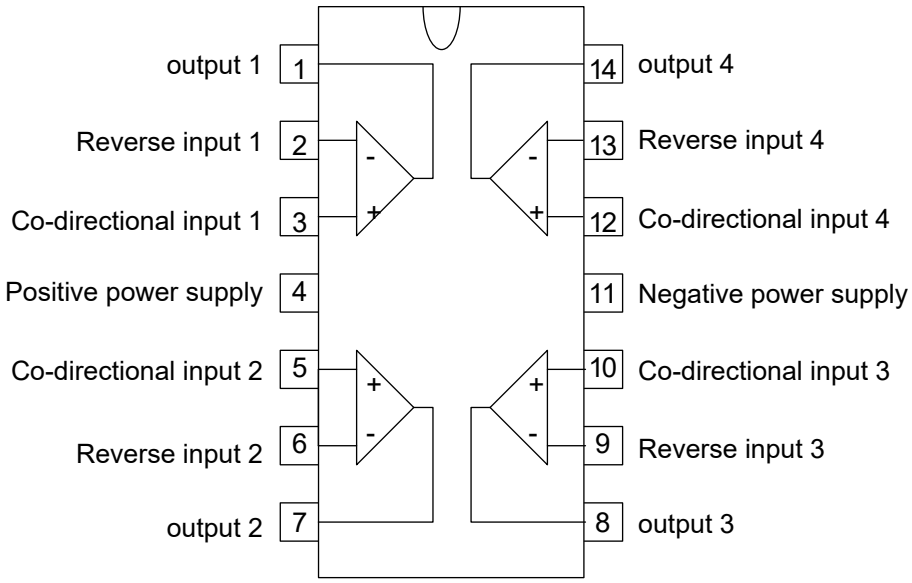

SOP-14

4.Limit Parameter

Absolute maximum rating, unless otherwise specified, Tamb=25°C.

Parameter		Value	Value	Units
Power Supply Voltage		V_{CC}	±18	V
Input Voltage		V_I	±15	V
Differential Mode Input Voltage		V_{ID}	±30	V
Power Consumption		P_{TOT}	680	mW
Working Temperature	UMW TL084I	T_{OPER}	-40 to 105	°C
	UMW TL084C		0 to 70	°C
Storage Temperature		T_{STG}	-65 to 150	°C

5.Electrical Characteristics

V_{CC}=±15V, Tamp=25°C shall be specified separately.

Parameter	Symbol	Conditions	Min	Typ	Max	Units
Input offset voltage	V_{IO}	R_S=50Ω		3	13	mV
Input offset current	I_{IO}			5	105	pA
Output bias current	I_{IB}			30	200	pA
Large signal voltage gain	AVD	R_L=2kΩ, V_O=±10V	25	200		V/mV
Power supply voltage rejection ratio	SVR	R_S=50Ω	65	85		dB
Single-channel operational amplifier static current	I_{CC}			1.4	2.5	mA
Input common mode voltage range	V_{ICM}		±11	-12~15		V
Common mode rejection ratio	CMR	R_S=50Ω	65	85		dB
Output short- circuit current	I_{OS}		10	50	60	mA
Output voltage swing	±Vopp	R_L=2kΩ	10	12		V
		R_L=10kΩ	12	13.5		V
Conversion rate	SR	V_{IN}=10V, R_L=2kΩ, C_L=100pF	8	16		V/μs

Parameter	Symbol	Conditions	Min	Typ	Max	Units
Rise time (T_{amb}=+25°C)	t_r	V_{in}=20mV, R_L=2kΩ, C_L=100pF,unity gain		0.1		μs
Overshoot (T_{amb}=+25°C)	K_{OV}	V_{in}=20mV, R_L=2kΩ, C_L=100pF, unity gain		10		%
Gain bandwidth product (T_{amb}=+25°C)	GBP	V_{in}=10mV, R_L=2kΩ C_L=100pF, f=100kHz	2.5	4		MHz
Input resistance	R_i			10^{12}		Ω
Total harmonic distortion (T_{amb}=+25°C	THD	f=1kHz, R_L=2kΩ, C_L=100pF A_V=20dB, V_O=2V_{pp}		0.01		%
Equivalent input noise voltage	e_n	R_S=100Ω, f=1KHz		15		nV/√Hz
Phase margin	Ø m			45		degrees
Channel separation	V_{O1}/V_{O2}	A_V=100		120		dB

1. The input bias currents are junction leakage currents which approximately double for every 10°C increase in the junction temperature.

6.1 Typical Characterisitics

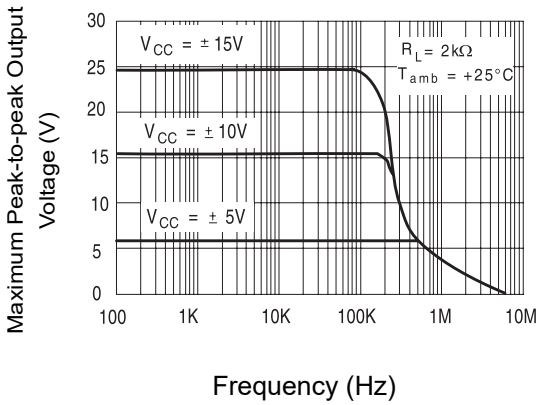


Figure 1: Maximum peak-to-peak output voltage versus frequency

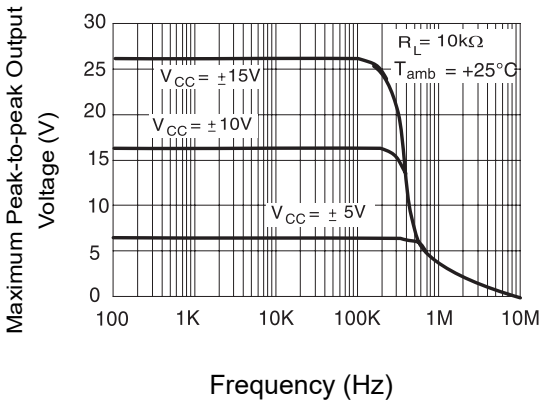


Figure 2: Maximum peak-to-peak output voltage versus frequency

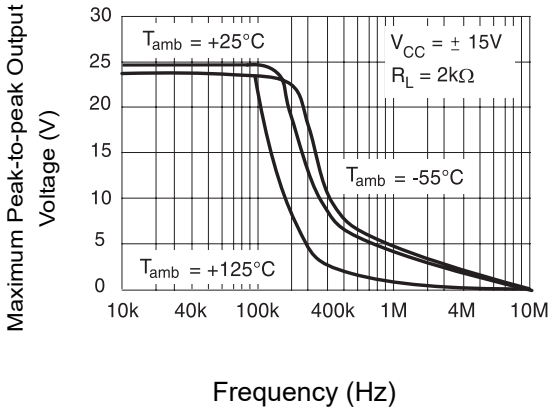


Figure 3: Maximum peak-to-peak output voltage versus frequency

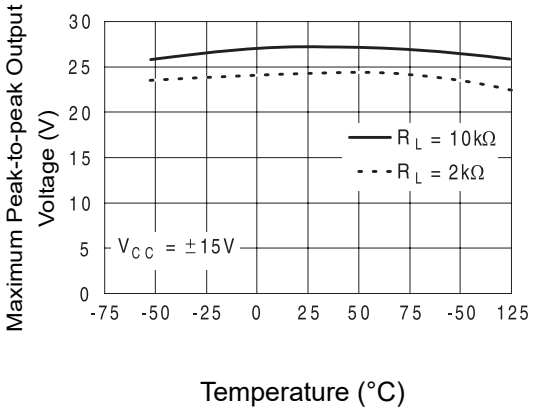


Figure 4: Maximum peak-to-peak output voltage versus free air temperature

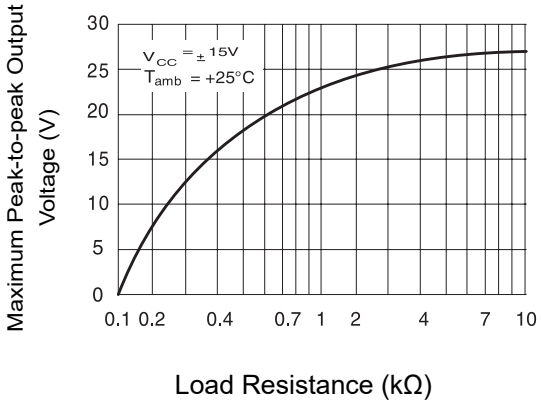


Figure 5: Maximum peak-to-peak output voltage versus load resistance

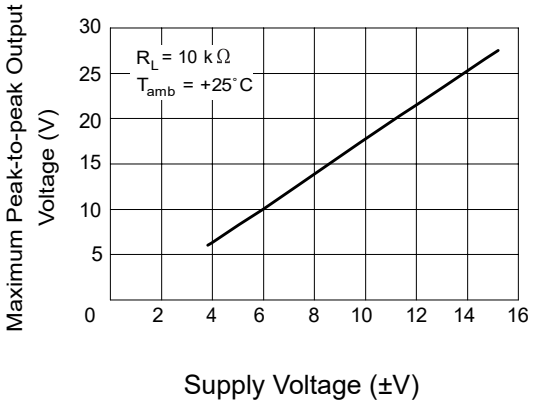


Figure 6: Maximum peak-to-peak output voltage versus supply voltage

6.2 Typical Characterisitics

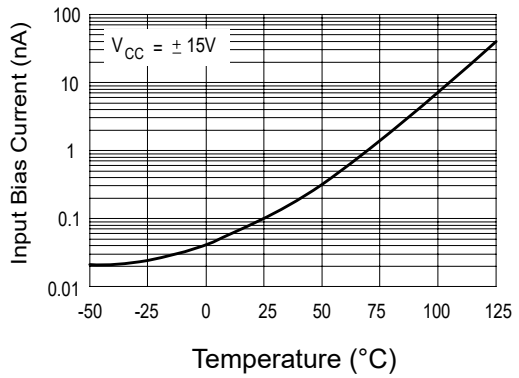


Figure 7: Input bias current versus free air temperature

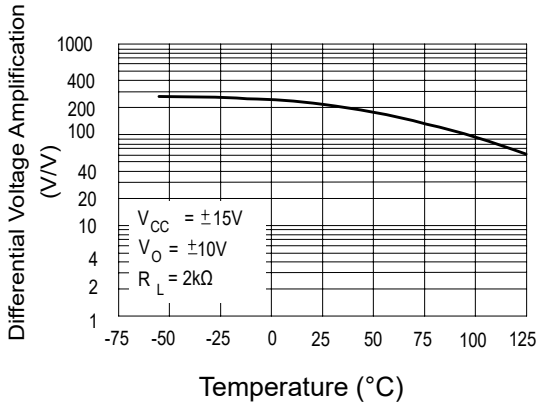


Figure 8: Large signal differential voltage amplification versus free air temperature

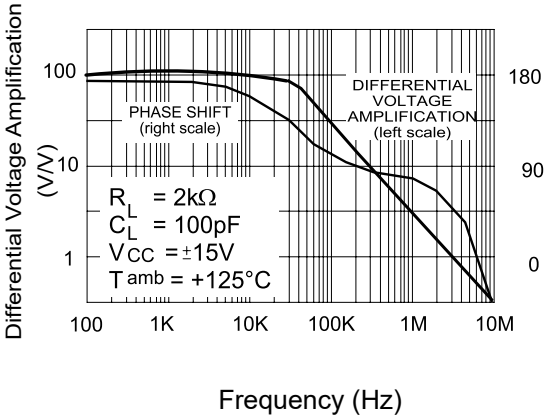


Figure 9: Large signal differential voltage amplification and phase shift versus frequency

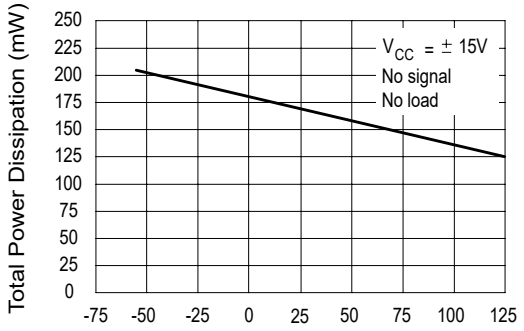


Figure 10: Total power dissipation versus free air temperature

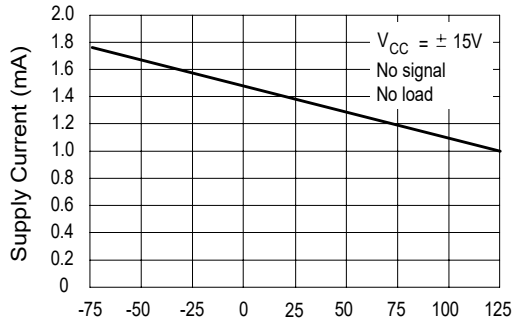


Figure 11: Supply current per amplifier versus free air temperature

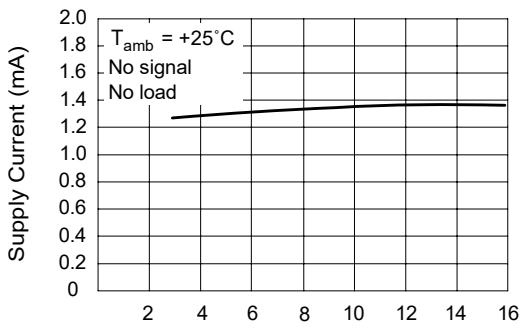


Figure 12: Supply current per amplifier versus supply voltage

6.3 Typical Characterisitics

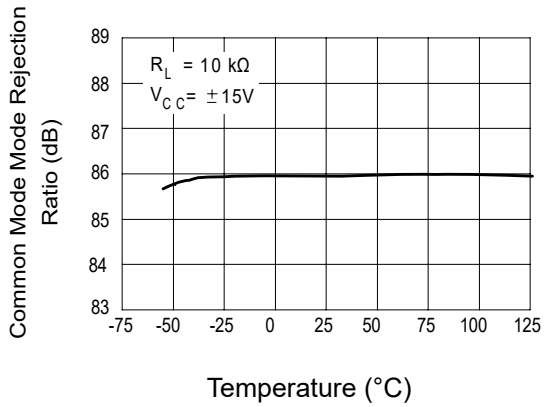


Figure 13: Common mode rejection ratio versus free air temperature

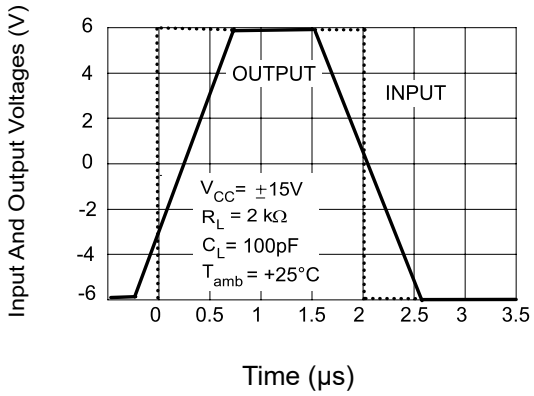


Figure 14: Voltage follower large signal pulse response

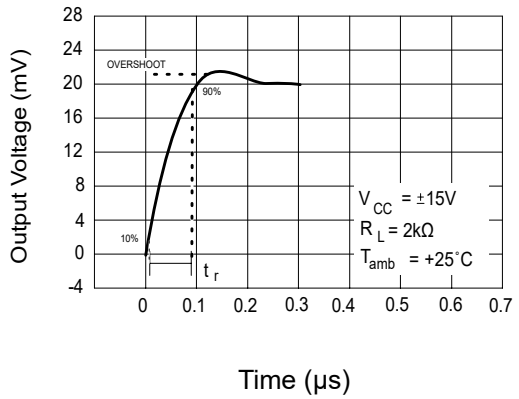


Figure 15: Output voltage versus elapsed time

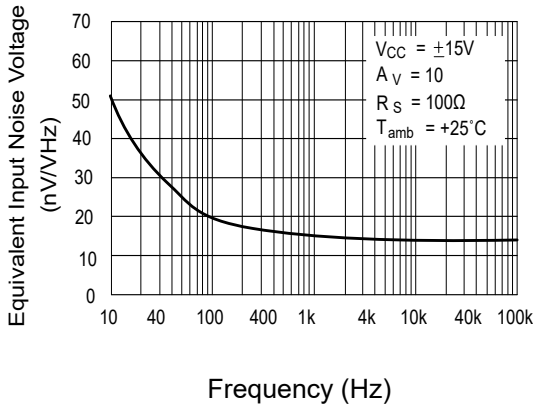


Figure 16: Equivalent input noise voltage versus frequency


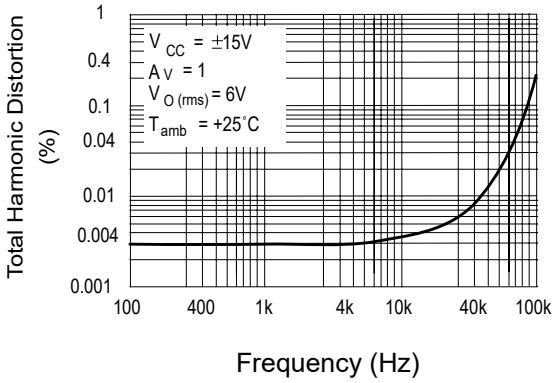



Figure 17: Total harmonic distortion versus frequency

7.Typical Application Diagram

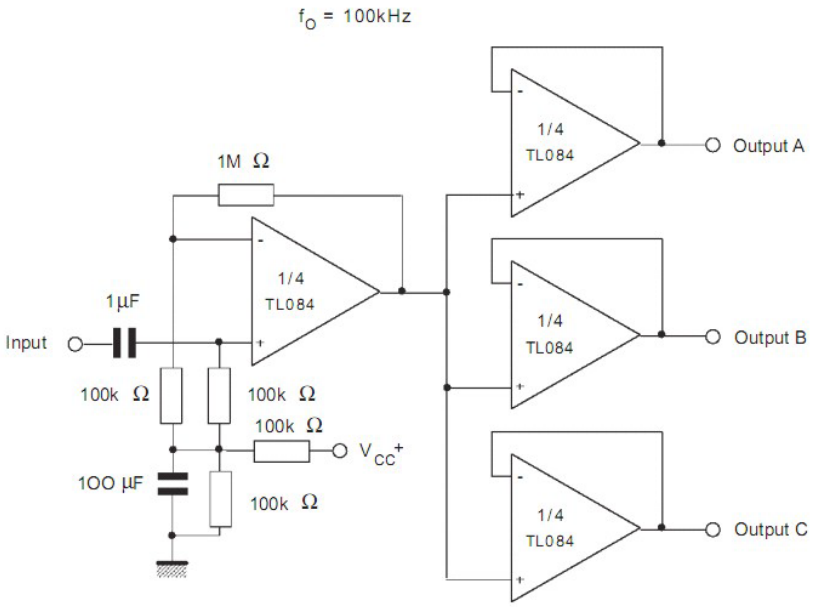

Audio Distribution Amplifier


8. Application of Audio Distribution Amplifier

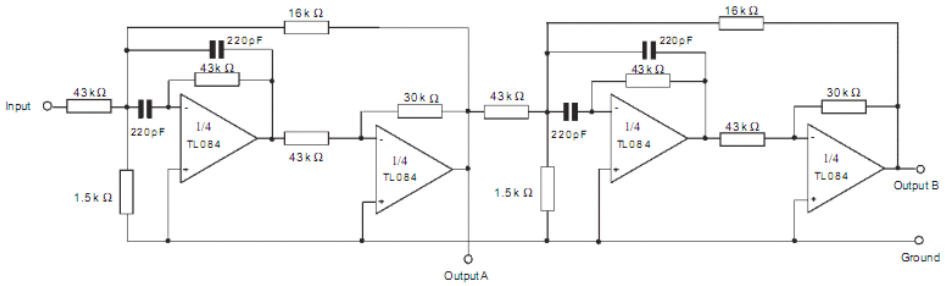

Application of active feedback filter

Positive Feedback Bandpass Filter

9.SOP-14 Package Outline Dimensions

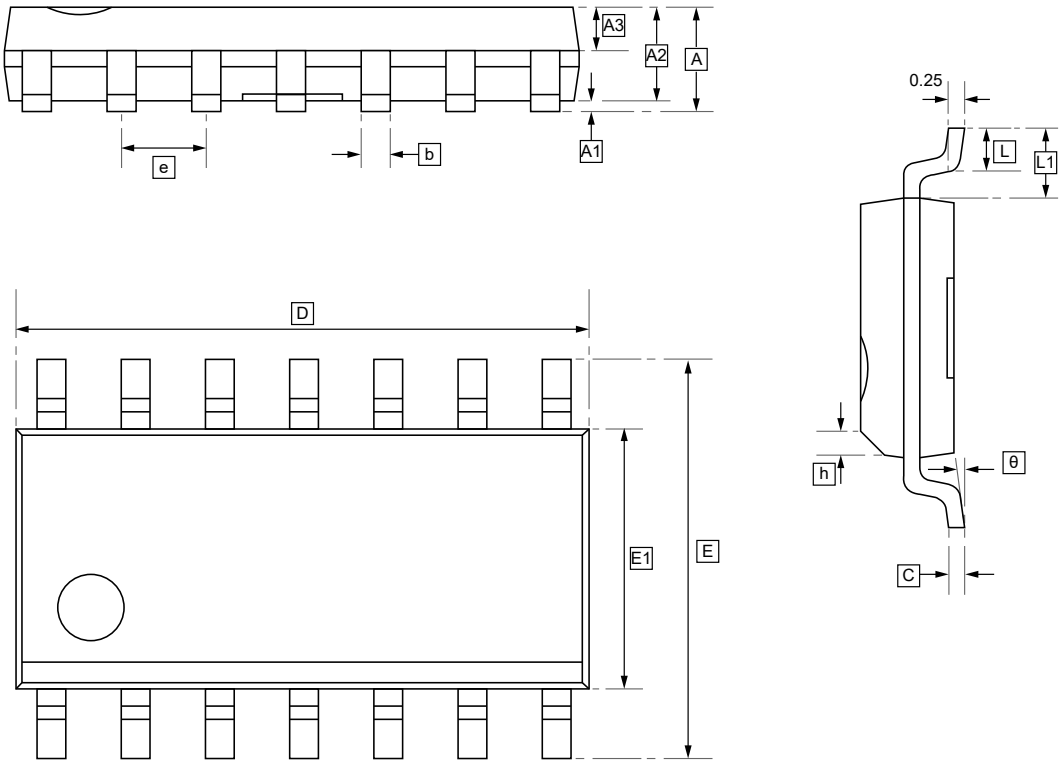

DIMENSIONS (mm are the original dimensions)

Symbol	A	A1	A2	A3	b	C	D	E	E1	e	h	L
Min	-	0.05	1.35	0.65	0.203	0.17	8.45	5.80	3.80	1.24	0.25	0.40
Max	1.75	0.25	1.55	0.75	0.305	0.25	8.85	6.20	4.00	1.30	0.50	0.80

Symbol	L1	θ
Min	1.00	0°
Max	1.10	8°

10.Ordering Information



yy: Year Code
ww: Week Code

Order Code	Marking	Package	Base QTY	Delivery Mode
UMW TL084CDR	TL084C	SOP-14	2500	Tape and reel
UMW TL084IDR	TL084I	SOP-14	2500	Tape and reel

11.Disclaimer

UMW reserves the right to make changes to all products, specifications. Customers should obtain the latest version of product documentation and verify the completeness and currency of the information before placing an order.

When applying our products, please do not exceed the maximum rated values, as this may affect the reliability of the entire system. Under certain conditions, any semiconductor product may experience faults or failures. Buyers are responsible for adhering to safety standards and implementing safety measures during system design, prototyping, and manufacturing when using our products to prevent potential failure risks that could lead to personal injury or property damage.

Unless explicitly stated in writing, UMW products are not intended for use in medical, life-saving, or life-sustaining applications, nor for any other applications where product failure could result in personal injury or death. If customers use or sell the product for such applications without explicit authorization, they assume all associated risks.

When reselling, applying, or exporting, please comply with export control laws and regulations of China, the United States, the United Kingdom, the European Union, and other relevant countries, regions, and international organizations.

This document and any actions by UMW do not grant any intellectual property rights, whether express or implied, by estoppel or otherwise. The product names and marks mentioned herein may be trademarks of their respective owners.